DOMUS



Fabricated Porcelain Surfaces 1.0

From complex cut-to-size requests to bespoke kitchens, bathrooms, offices and furniture, every designer and every project can now take advantage of the stunning beauty, unrivalled choice and superior technical performance of state-of-the-art porcelain stoneware.



Vanity Units




Kitchen Countertops




Furniture



Steps & Staircases



Cut-to-Size



Bespoke Products









Fabricated Porcelain Surfaces 1.0 Overview

Click colour swatch to navigate

DLBFX 08

DLBCX 07


DLBCX 02


DLBCX 03

DLDAX 01


DLVEX 05


DLBFX 09


DLVNX 01


DLKNX 01


DLONX 01


DLBFX 02


DLKNX 02


DLONX 02


DLDAX 03


DLBFX 07


DLVNX 04



DLBFX 08 Soft

3D·Fit® Technology | Corelith® Technology

Bera & Beren Slab

Bera & Beren Slab takes inspiration from Portuguese and Catalan limestone. This fabricated porcelain slab range has a refined, minimal character in a timeless stone-look palette. The natural tones demonstrate a subtle shade variation with meticulous surface detail.



DOMUS

« Back to colours

Slab Size: 3240 x 1600mm
Working Size: 3200 x 1560mm
Thickness: 12mm

Bera & Beren Slab





DLBFX 09 Honed

3D·Fit® Technology | Corelith® Technology

« Back to colours

Slab Size:	3240 x 1600mm
Working Size:	3200 x 1560mm
Thickness:	12mm

DOMUS



DLBFX 02 Soft

3D·Fit® Technology | Corelith® Technology


Bera & Beren Slab



DOMUS

« Back to colours

Slab Size:	3240 x 1600mm
Working Size:	3200 x 1560mm
Thickness:	12mm

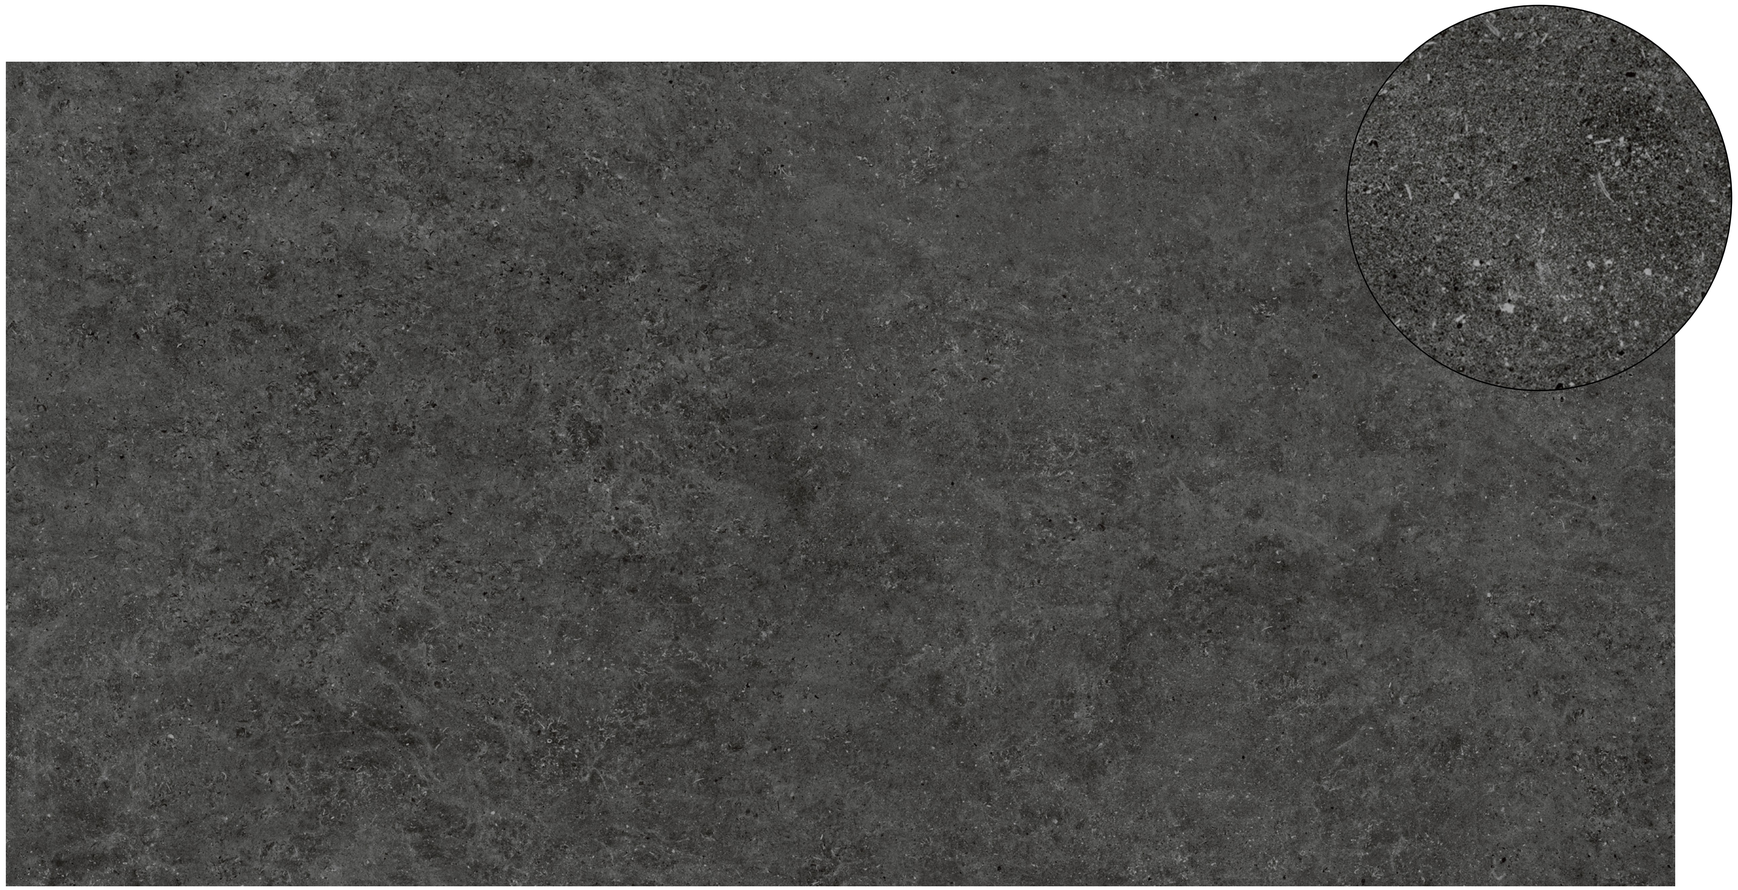

DLBFX 07 Soft

3D·Fit® Technology | Corelith® Technology

Bera & Beren Slab



Slab Size:	3240 x 1600mm
Working Size:	3200 x 1560mm
Thickness:	12mm

DOMUS

« Back to colours



Blanc Slab

The Blanc Slab marble-look fabricated porcelain range showcases purity and elegance with clear tones and a soft textured finish. It captures the beauty of marble without imperfections. Refined and timeless, it offers enhanced durability and style.



DLBCX 07 Soft Textured

3D·Fit® Technology

DOMUS

« Back to colours

Slab Size:	3240 x 1600mm
Working Size:	3200 x 1560mm
Thickness:	12mm



DLBCX 02 Soft Textured

3D·Fit®
Technology

Blanc Slab



Slab Size: 3240 x 1600mm
Working Size: 3200 x 1560mm
Thickness: 12mm

DOMUS

« Back to colours



DLBCX 03 Soft Textured

3D·Fit®
Technology

Blanc Slab



Slab Size: 3240 x 1600mm
Working Size: 3200 x 1560mm
Thickness: 12mm

DOMUS

« Back to colours



DLKNX 01 Soft Textured / Honed

3D·Fit® Technology | Corelith® Technology

Kendo Slab

Kendo Slab draws inspiration from the protected stone of the Bavarian Jura Mountains, formed from marine deposits. This fabricated porcelain slab range depicts dark-coloured organic-shaped markings with an extraordinary richness of intensities.



DOMUS

« Back to colours

Slab Size:	3240 x 1600mm
Working Size:	3200 x 1560mm
Thickness:	12mm



Kendo Slab



DLKNX 02 Soft Textured / Honed

3D·Fit® Technology | Corelith® Technology

DOMUS

« Back to colours

Slab Size:	3240 x 1600mm
Working Size:	3200 x 1560mm
Thickness:	12mm



DLONX 01 Soft Textured

3D·Fit® Technology | Corelith® Technology

Noon Slab

Noon Slab is a soothing fabricated porcelain range of delicate stone-look slabs with fossil inclusions that reveal, under close inspection, a unique manually-chiselled appearance traditionally found only from exclusive stone quarries.



DOMUS

« Back to colours

Slab Size:	3240 x 1600mm
Working Size:	3200 x 1560mm
Thickness:	12mm



DLONX 02 Soft Textured

3D·Fit® Technology | Corelith® Technology

Noon Slab



Slab Size:	3240 x 1600mm
Working Size:	3200 x 1560mm
Thickness:	12mm

DOMUS

« Back to colours



DLDAX 01 Soft Textured / Honed

3D·Fit® Technology | Corelith® Technology

Oda Slab

Oda Slab is a range of fabricated porcelain slabs with colours designed to help create contemporary and timeless settings while paying homage to the natural material. The products include soft, nuanced shading in the form of fossils of various sizes.



DOMUS

« Back to colours

Slab Size: 3240 x 1600mm
Working Size: 3200 x 1560mm
Thickness: 12mm



DLDAX 03 Soft Textured / Honed

3D·Fit® Technology | Corelith® Technology

DOMUS

« Back to colours

Oda Slab



Slab Size:	3240 x 1600mm
Working Size:	3200 x 1560mm
Thickness:	12mm



DLVEX 05 Cross Cut Honed

3D·Fit® Technology | Corelith® Technology

Verso Slab

Verso Slab is inspired by travertine, a sedimentary rock formed in thermal waters and waterfalls. This fabricated porcelain slab range features Cross Cut, showcasing the cross-section of sediment layers cut along the grain in a honed finish.



DOMUS

« Back to colours

Slab Size: 3240 x 1600mm
Working Size: 3200 x 1560mm
Thickness: 12mm



DLVNX 01 Soft Textured / Honed

3D·Fit® Technology | Corelith® Technology

Vonn Slab

Inspired by nature's efficiency, Vonn Slab is a fabricated porcelain range that replicates the pure essence of stone. Its advanced manufacturing allows seamless architectural continuity in diverse interior projects, from residential to commercial.



DOMUS

« Back to colours

Slab Size: 3240 x 1600mm
Working Size: 3200 x 1560mm
Thickness: 12mm



DLVNX 04 Honed

3D·Fit® Technology | Corelith® Technology

Vonn Slab



Slab Size: 3240 x 1600mm
Working Size: 3200 x 1560mm
Thickness: 12mm

DOMUS

« Back to colours

Technical Data

Glazed Porcelain (BS EN 14411 – Group BIa)


DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & Width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Planarity (Flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors and omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. **April 2025**.

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water Absorption	BS EN ISO 10545-3	≤ 0.5%	0.1% (Typical Value)
Impact Resistance	BS EN ISO 10545-5	Declared Value	≥ 0.80 (Typical Value)
Linear Thermal Expansion Coefficient	BS EN ISO 10545-8	Declared Value	≤ 7 x 10-6 / °C-1 (Typical Value)
Thermal Shock Resistance	BS EN ISO 10545-9	No Visible Defects	Resistant
Frost Resistance	BS EN ISO 10545-12	No Surface Alteration	Resistant
Chemical Resistance: Low Concentrations of Acids & Alkali	BS EN ISO 10545-13	No Visible Defects	GLA
Chemical Resistance: High Concentrations of Acids & Alkali	BS EN ISO 10545-13	No Visible Defects	GHA
Chemical Resistance: Domestic Chemicals & Additives for Swimming Pools	BS EN ISO 10545-13	B min.	GA
Stain Resistance	BS EN ISO 10545-14	Min. Class 3 — Glazed	Class 5
UV Resistance	DIN 51094	No Visible Defects	Conforms
Reaction to Fire	Based on the decision 96/603/EC and its changes	$A1_{FL}$/A1	$A1_{FL}$/A1

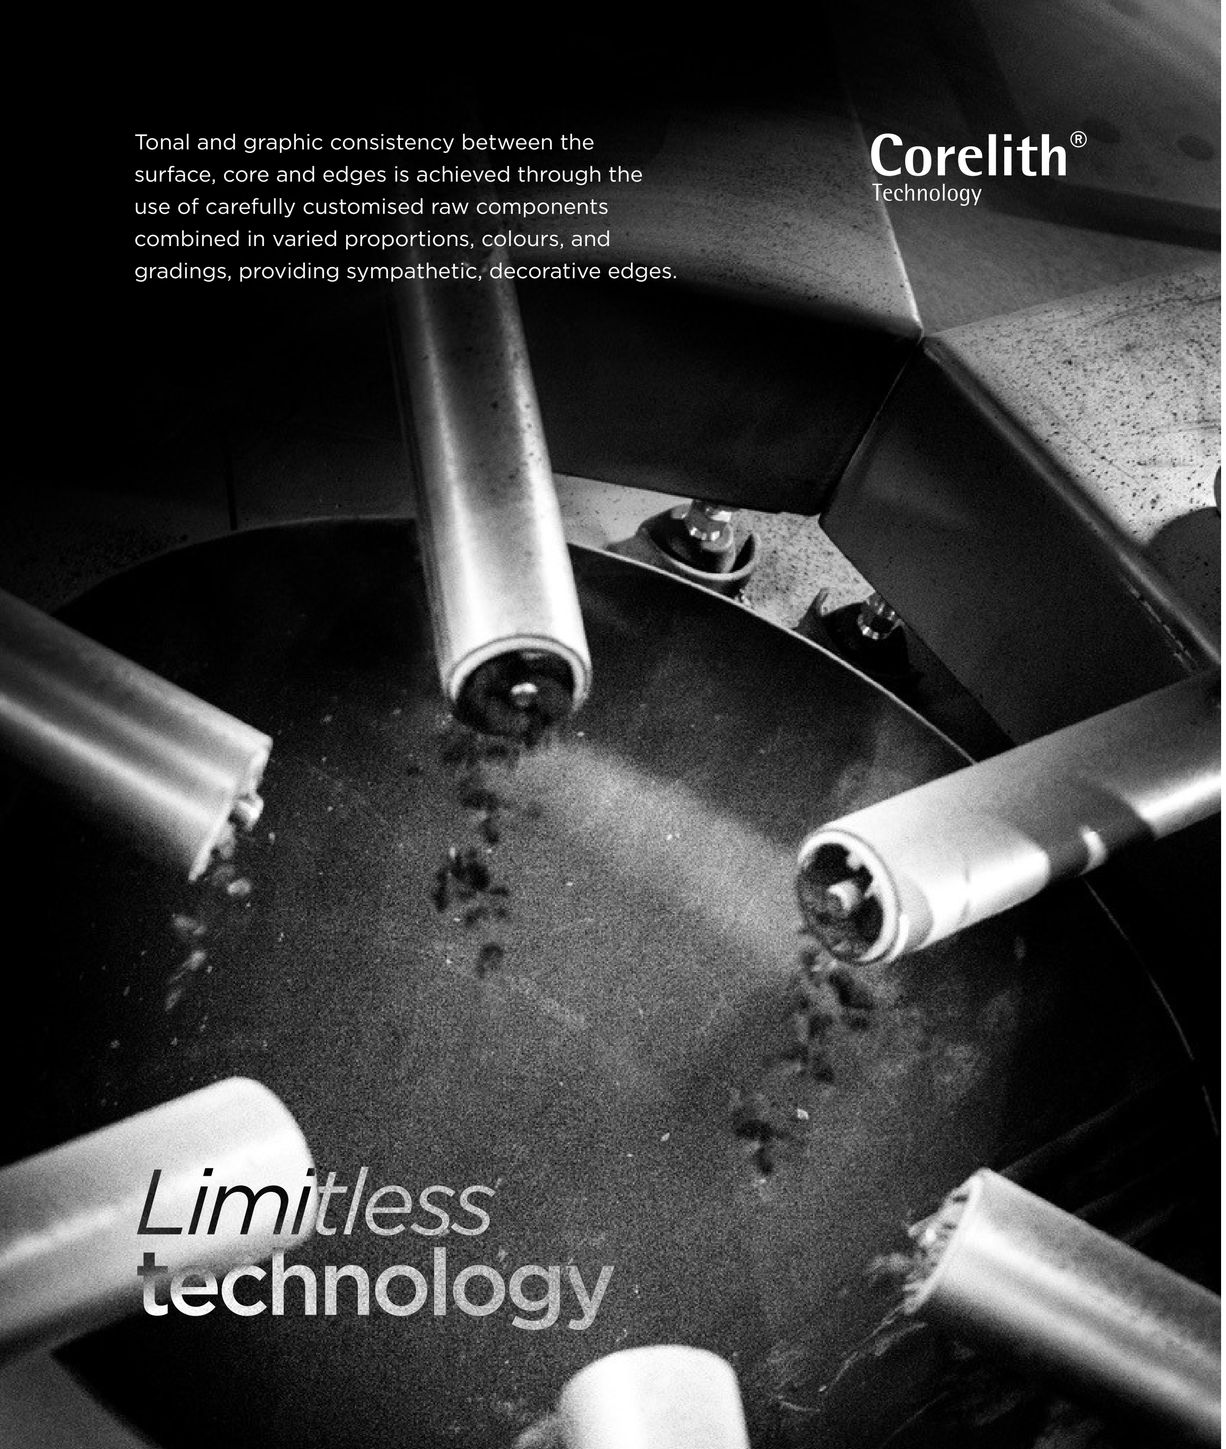

Tonal and graphic consistency between the surface, core and edges is achieved through the use of carefully customised raw components combined in varied proportions, colours, and gradings, providing sympathetic, decorative edges.

Corelith®
Technology

Limitless
technology




Industry-leading 3D digital printing, with incredibly high definition, is used to create images and textures of stone in perfect alignment, providing surface finishes with the ultimate authenticity and realism.

3D·Fit®
Technology


Countertop Profiles

Countertops with a downstand thickness of between 40-100mm are supplied with precision cut mitred apron return edge, and employ vein matching where possible at panel joins.

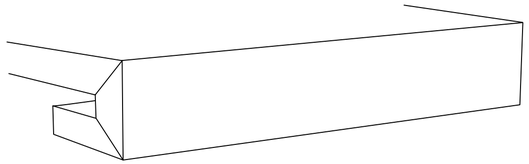


Mitred Apron Return
(downstand thickness: 40–100mm)


Our 12mm-thick countertops can be supplied with one of the following edge profiles:

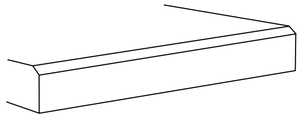


Bevelled Edge

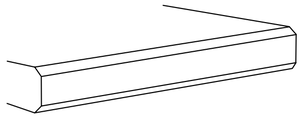


Double Bevelled Edge

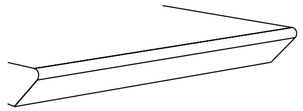


Shark Nose Edge

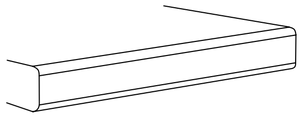


Double Pencil Edge

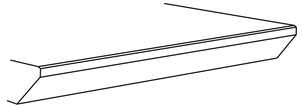

Sharp Shark Nose Edge

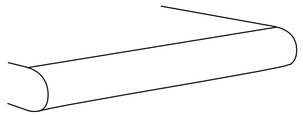

Bullnose Edge

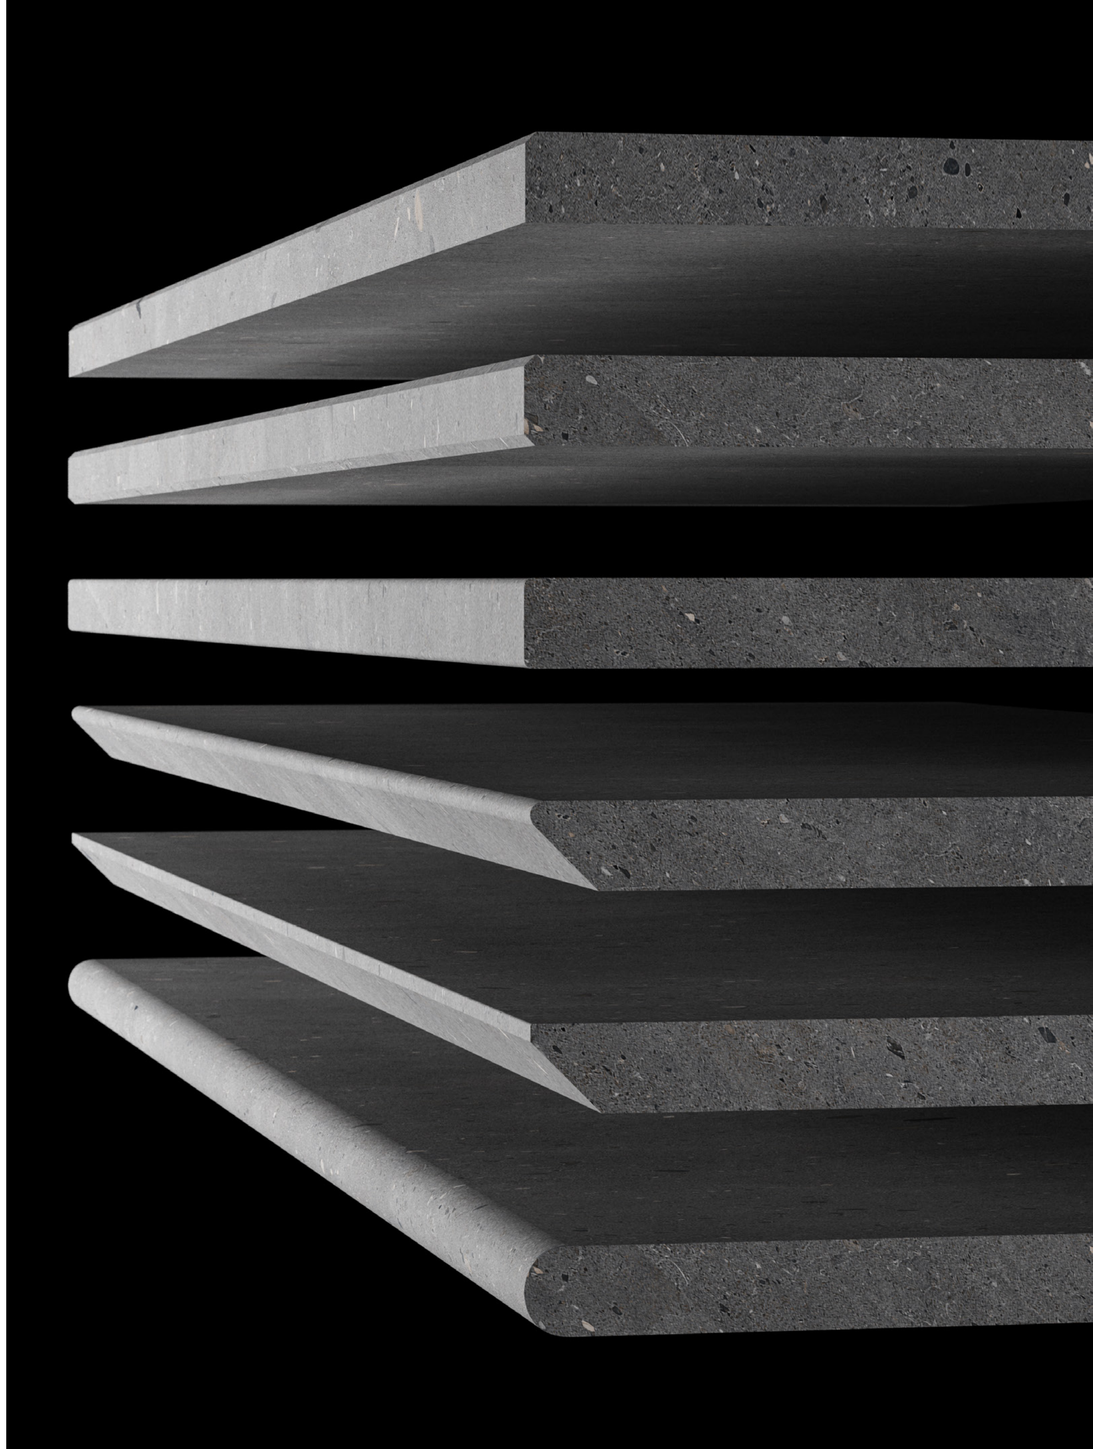

Stocked & Stored in the UK

Domus holds 1,000sqm of slab stock across the Fabricated Porcelain Surfaces 1.0 collection. Stored at the specialist premises of our UK fabrication partner, this ensures immediate availability to respond to individual and smaller project requirements and safe and secure handling of the material at the point of order. Larger project volumes are expedited through an expert Logistics Team and delivered directly to our fabrication facilities.



Fabrication Services & Facilities

The modern facilities include ‘state-of-the-art’ CNC water jet and titanium cutting machinery with fully automated handling alongside extensive workshop facilities for the expert construction and finishing of all fabricated vanity units, kitchen surfaces, stairs, and tables. Everything required to construct the finished articles, including structure, accessories, and all raw materials, is available and laid out with an efficient workflow.



Contact Us

Call, Email, Online, Showrooms

DOMUS

t 020 8481 9500
fabrication@domusgroup.com
domusgroup.com

Clerkenwell
23-25 Great Sutton Street
Clerkenwell
London EC1V 0DN

Birmingham
Derwent Works
Henrietta Street
Birmingham B19 3AB

Manchester (Boss Design)
25, The Lightwell
27 Booth Street
Manchester M2 4AF

Surrey (inc. Outlet)
3 Molesey Business Centre
Central Avenue, West Molesey
Surrey KT8 2QZ

Battersea
60 Queenstown Road
Battersea
London SW8 3RY

Glasgow
Suite 2.02, McLellan Works
274 Sauchiehall Street
Glasgow G2 3EH

