

Spectrum

Porcelain Minimal




40 Colours / 3 Finishes / 14 Sizes / 11 Incised Mosaics

Spectrum is a wide range of shapes and sizes in solid, through-body colours. Soft neutral hues can combine with the brighter tones to provide ultimate flexibility in design.





Sizes

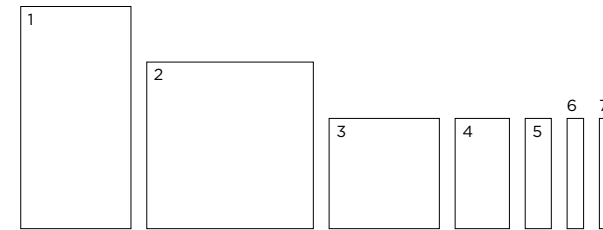

	Size (mm)	Thickness	Finish	Colour Availability
1	1186 x 592 (R)	9.8	Matt	DRS 01 & 05
		9.8	Soft	DRS 01, 05 & 06
		9.3	Polished	DRS 01, 05 & 06
2	889 x 889 (R)	10.5	Matt	DRS 01, 47, 58 & 69
		10.5	Soft	DRS 01, 40, 47*, 48, 58 & 69
		9.8	Polished	DRS 01, 40, 47*, 48, 58 & 69
3	592 x 592 (R)	8.5	Matt	DRS 01-05, 07, 08, 10, 12, 14, 19, 20, 24, 25, 47*, 49, 50, 53, 54, 58, 61-66, 69 & 74
		8.5	Soft	All colours*
		8	Polished	All colours*
4	592 x 295 (R)	8.5	Matt	DRS 01-05, 07, 08, 10, 12, 14, 19, 20, 24, 25, 47*, 49, 50, 53, 54, 58, 61-66, 69 & 74
		8.5	Soft	All colours*
		8	Polished	All colours*
5	Bar 592 x 147 (R)	8.5	Matt	DRS 01, 03, 06-08, 10, 12, 14, 19, 20, 24, 25, 47-51, 60-64 & 66-73
6	Bar 592 x 96 (R)	8.5	Matt	DRS 01-05, 07, 08, 10, 12, 14, 19, 24, 25, 47, 49, 50, 53, 54, 58, 61, 63-66, 69 & 74
		8.5	Soft	DRS 01, 02, 05-07, 40, 47, 48, 51, 53-55, 58, 65, 67, 68 & 70-74
7	Bar 592 x 47 (R)	8.5	Matt	DRS 01, 03, 06-08, 10, 12, 14, 19, 20, 24, 25, 47-51 & 60-73

(R) Rectified size – square edge with bevel. Swatch colours may vary from original. Samples should be requested. More sizes shown on next page. *DRS 47 comes in 870 x 870mm size instead of 889 x 889mm since the product is so pure that it shrinks far more during production. †DRS 47 is only available in 9mm thickness in the 592 x 592mm size (Matt & Soft finishes), 592 x 295mm size (Matt, Soft & Polished finishes) and 8.5mm thickness in the 592 x 592 (Polished finish).


V1 - Low
Shade Variation

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com



More Sizes

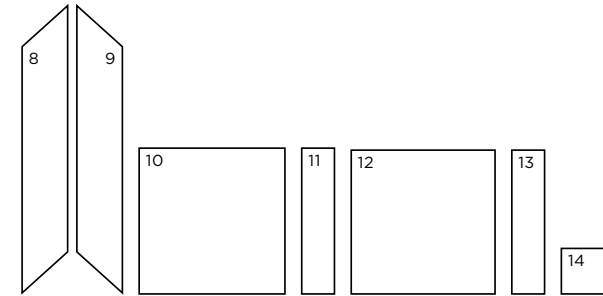

	Size (mm)	Thickness	Finish	Colour Availability
8	Chevron Right 497 x 97 (R)*	8.5	Soft	All colours DRS 01-08, 10, 12, 14, 19, 20, 24, 25, 47, 49, 50, 53, 54, 58, 61-66, 69, 74
		8.5	Matt	
9	Chevron Left 497 x 97 (R)*	8.5	Soft	All colours DRS 01-08, 10, 12, 14, 19, 20, 24, 25, 47, 49, 50, 53, 54, 58, 61-66, 69, 74
		8.5	Matt	
10	300 x 300 (N)	7.7	Matt	DRS 01, 02, 03, 06 & 47
11	Bar 300 x 70 (N)	7.7	Matt	DRS 01, 02, 03, 06 & 47
12	295 x 295 (R)	8.5	Matt	DRS 01-05, 07, 08, 10, 12, 14, 19, 20, 24, 25, 47 [†] , 49, 50, 53, 54, 58, 61-66, 69 & 74 All colours [†] All colours [†]
		8.5	Soft	
		8	Polished	
13	Bar 295 x 70 (R)	8.5	Matt	DRS 01-05, 07, 08, 10, 12, 14, 19, 20, 24, 25, 47, 49, 50, 53, 54, 58, 62-66 & 74 DRS 06, 40, 47, 48, 51, 53, 60, 64, 67, 68 & 70-73 DRS 01-08, 10, 12, 14, 19, 20, 24, 25, 40, 47-51, 53-55, 63, 66 & 72
		8.5	Soft	
		8	Polished	
14	96 x 96 (R)	8.5	Soft	All colours


(R) Rectified size - square edge with bevel. (N) Nominal size - pressed edge. Swatch colours may vary from original. Samples should be requested. Incised Mosaic sizes shown on next page. *Full Chevron factory size from tip to tip is 592 x 96mm. [†]DRS 47 is only available in 9mm thickness in the 295 x 295mm size (Matt, Soft & Polished finishes).

V1 - Low
Shade Variation

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Incised Mosaics

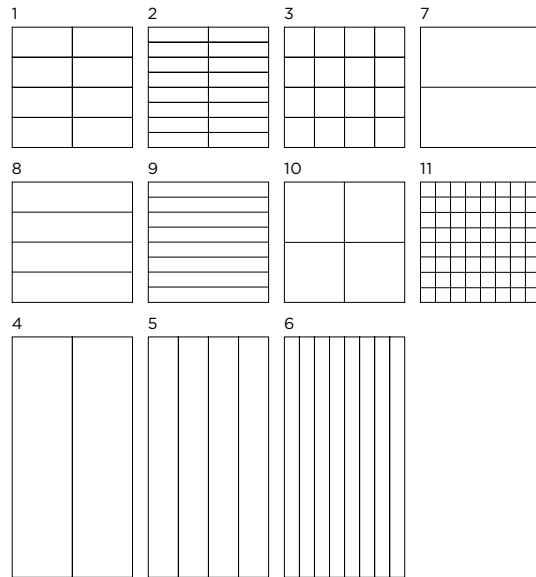

Wall: DRS 50 & 68 Matt
 Pillar: DRS 03 Matt
 Floor: DRS 03, 50 & 67 Matt

	Size (mm)	Thickness	Finish	Colour Availability
1	Cross 8 147 x 72.5 on 295 x 295 tile (R)	8.5 8	Matt Polished	All colours All colours
2	Cross 16 147 x 35 on 295 x 295 tile (R)	8.5 8	Matt Polished	All colours All colours
3	Square 16 72.5 x 72.5 on 295 x 295 tile (R)	8.5 8	Matt Polished	All colours All colours
4	Linea 2 592 x 147 on 592 x 295 tile (R)	8.5 8	Matt Polished	DRS 01, 02, 04-06, 40, 47, 58 & 60-74 DRS 01, 02, 04-06, 40, 47, 58 & 60-74
5	Linea 4 592 x 72.5 on 592 x 295 tile (R)	8.5 8	Matt Polished	DRS 01, 02, 04-06, 40, 47, 58 & 60-74 DRS 01, 02, 04-06, 40, 47, 58 & 60-74
6	Linea 8 592 x 35 on 592 x 295 tile (R)	8.5 8	Matt Polished	DRS 01, 02, 04-06, 40, 47, 58 & 60-74 DRS 01, 02, 04-06, 40, 47, 58 & 60-74
7	Linea 2 296 x 147 on 295 x 295 tile (R)	8.5 8	Matt Polished	All colours All colours
8	Linea 4 296 x 72.5 on 295 x 295 tile (R)	8.5 8	Matt Polished	All colours All colours
9	Linea 8 296 x 35 on 295 x 295 tile (R)	8.5 8	Matt Polished	All colours All colours
10	Square 4 147 x 147 on 295 x 295 tile (R)	8.5 8	Matt Polished	All colours All colours
11	Square 64 35 x 35 on 295 x 295 tile (R)	8.5 8	Matt Polished	All colours All colours

(R) Rectified size - square edge with bevel.
 Swatch colours may vary from original. Samples should be requested.

V1 - Low
 Shade Variation

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Spectrum

Technical Data

Product Type: Unglazed Porcelain (BS EN 14411 – Group Bla)

Use: Floors & Walls

Product Code: DRS

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	±0.2% - Matt ±0.1% - Polished
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	±0.3% - Matt ±0.2% - Polished
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	±0.3% - Matt ±0.2% - Polished
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	±0.3% - Matt ±0.2% - Polished
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R9 from 3° to 10°	Matt
Areas with bare feet	DIN 51097	A over 12° to 18°	Matt
Slip resistance Coefficient of friction	BS 7976-2	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	≤ 0.05% (Typical value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	≥ 45 N/mm ² (Typical value)
Breaking strength	BS EN ISO 10545-4	≥ 1300 N	≥ 2000 N (Typical value)
Resistance to deep abrasion (unglazed)	BS EN ISO 10545-6	≤ 175 mm ³	≤ 160 mm ³ (Typical value)
Linear thermal expansion coefficient	BS EN ISO 10545-8	Declared value	≤ 8x10 ⁻⁶ /°C (Typical value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	ULA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB min.	UA
Stain resistance	BS EN ISO 10545-14	Declared value	Class 4 - Matt Class 3 - Polished
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	A1 _{FL} /A1
Recycled content			0%

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. July 2019



DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com