

# Confetto

*Porcelain Design*




12 Colours / 1 Finish / 3 Sizes

Confetto is a range of small-format porcelain tiles that rediscovers the charm of authentic ceramics with a handmade touch. Thanks to its minimalist yet sophisticated design, Confetto is perfect for residential and commercial settings where you want to recreate a cosy allure with the charm of 'handmade' aesthetics.






Wall (Top): DMCN 01 Satin  
Wall (Bottom): DMCN 08 Satin

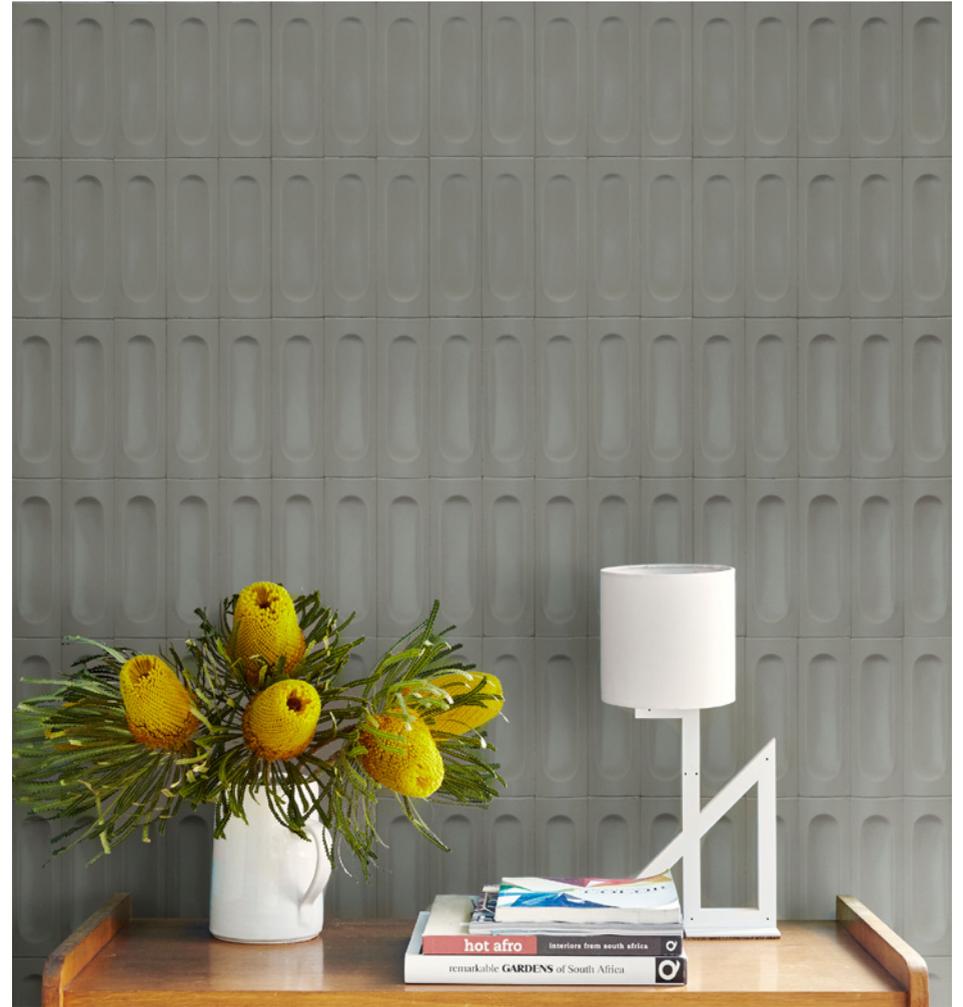

Wall: DMCN 04 3D Satin



# Sizes

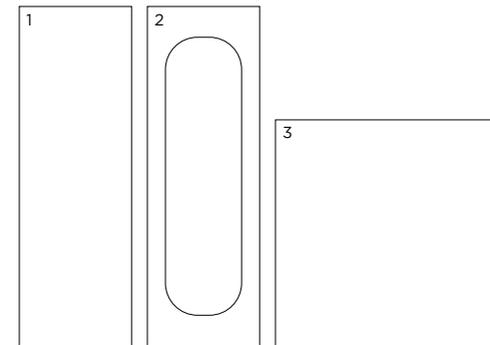

	Size (mm)	Thickness	Finish	Colour Availability
1	150 x 50 (N)	10	Satin	All colours
2	3D 150 x 50 (N)	12.5	Satin	All colours
3	100 x 100 (N)	10	Satin	All colours

(N) Nominal size - pressed edge. Swatch colours may vary from original. Samples should be requested.



# V1 - Low Shade Variation



DMCN 01




DMCN 02



DMCN 03



DMCN 05

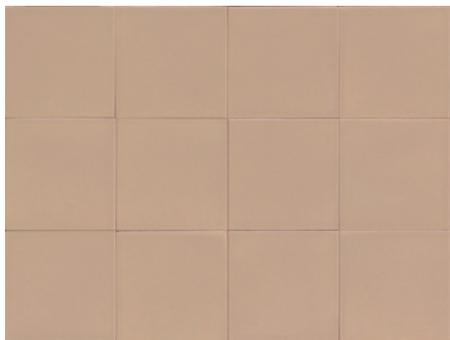

DMCN 09



DMCN 10



DMCN 04



DMCN 06 3D



DMCN 08



DMCN 07 3D



DMCN 11



DMCN 11 3D



DMCN 12



DMCN 12 3D

# Confetto

## Technical Data

**Product Type:** Glazed Porcelain (BS EN 14411 - Group BIa)

**Use:** Floors & Walls\*

**Product Code:** DMCN

\* 3D tiles not suitable for floors

## DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement (for nominal size <i>N</i> )		Actual Value
		70mm ≤ N < 150mm	N ≥ 150mm	
Length & width	BS EN ISO 10545-2	± 0.9mm	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 0.5mm	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%		Conforms

## SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R9 from 3° to 10°	Satin
Slip resistance (Pendulum) Coefficient of friction	BS EN 16165	Test results upon request	

## PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm <sup>2</sup>	Conforms
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm ≥ 1300 N	Conforms
Resistance to surface abrasion (glazed tiles)	*Factory classification	—	Class F * doesn't apply to 3D tiles
Linear thermal expansion coefficient	BS EN ISO 10545-8	Declared value	≤ 9 x 10 <sup>-6</sup> / °C (typical value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance:			
Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA-GLB
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHA-GHB
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3 - glazed	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 <sub>FL</sub> /A1	A1 <sub>FL</sub> /A1
Recycled content			23% - 100mm x 100mm 4% - 150mm x 50mm

\*Factory classification

Class F – tiles suitable for any room of a house without direct access from the outside or access not protected by doormats. Average stress abrasive wear.



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. November 2023

**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com