Confetto

Porcelain Design

Wall: DMCN 08 Satin

12 Colours / **1** Finish / **3** Sizes

Confetto is a range of small-format porcelain tiles that rediscovers the charm of authentic ceramics with a handmade touch. Thanks to its minimalist yet sophisticated design, Confetto is perfect for residential and commercial settings where you want to recreate a cosy allure with the charm of 'handmade' aesthetics.

Wall & Bath Surround: DMCN 10 Satin
Unit Front: DMCN 09 3D Satin

Wall (Top): DMCN 01 Satin
Wall (Bottom): DMCN 08 Satin

Wall: DMCN 04 3D Satin

DMCN 01 | DMCN 01 3D | DMCN 02 | DMCN 02 3D

DMCN 03 | DMCN 03 3D | DMCN 05 | DMCN 05 3D

DMCN 04 | DMCN 04 3D | DMCN 06 | DMCN 06 3D

DMCN 09 | DMCN 09 3D | DMCN 10 | DMCN 10 3D

DMCN 08 | DMCN 08 3D | DMCN 07 | DMCN 07 3D

DMCN 11 | DMCN 11 3D | DMCN 12 | DMCN 12 3D

Sizes

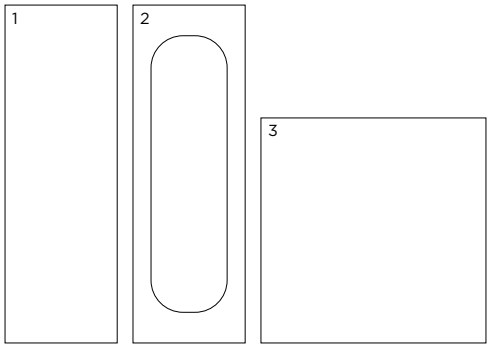

	Size (mm)	Thickness	Finish	Colour Availability
1	150 x 50 (N)	10	Satin	All colours
2	3D 150 x 50 (N)	12.5	Satin	All colours
3	100 x 100 (N)	10	Satin	All colours

(N) Nominal size – pressed edge. Swatch colours may vary from original. Samples should be requested.

V1 – Low
Shade Variation

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

V1 – Low Shade Variation

DMCN 01

DMCN 02

DMCN 03

DMCN 05

DMCN 09

DMCN 10

DMCN 04

DMCN 06 3D

DMCN 08

DMCN 07 3D

DMCN 11

DMCN 11 3D

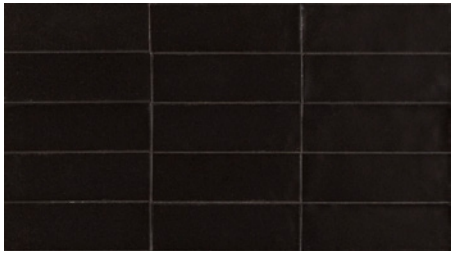

DMCN 12

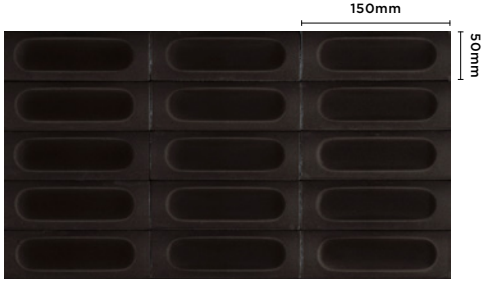

DMCN 12 3D

Confetto

Technical Data

Product Type: Glazed Porcelain (BS EN 14411 – Group BIa)
Use: Floors & Walls*
Product Code: DMCN

*** 3D tiles not suitable for floors**

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement (for nominal size *N*) 70mm ≤N<150mmN ≥ 150mm		Actual Value
Length & width	BS EN ISO 10545-2	± 0.9mm	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 0.5mm	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%		Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R9 from 3° to 10°	Satin
Slip resistance (Pendulum) Coefficient of friction	BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm^2	Conforms
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm ≥ 1300 N	Conforms
Resistance to surface abrasion (glazed tiles)	*Factory classification	___	Class F * doesn't apply to 3D tiles
Linear thermal expansion coefficient	BS EN ISO 10545-8	Declared value	≤ 9 x 10-6 / °C (typical value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA-GLB
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHA-GHB
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3 – glazed	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	$A1_{FL}$/A1	$A1_{FL}$/A1
Recycled content			23% - 100mm x 100mm 4% - 150mm x 50mm

**Factory classification*
Class F – tiles suitable for any room of a house without direct access from the outside or access not protected by doormats. Average stress abrasive wear.

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale.

November 2023

DOMUS
service@domusgroup.com | t: 020 8481 9500 | domusgroup.com