Les Bois

Porcelain Wood

Wall: DKLB 01 Chevry Mosaic Natural

5 Colours / **1** Finish / **6** Sizes / **2** Mosaics / **3** Décors

Les Bois reimagines wood-effect stoneware with meticulous attention to detail, transforming each grain pattern, gnarl, and irregular feature into an expression of tactile elegance. Refer to Les Bois 20mm for coordinating outdoor tiles in 20mm thickness.

Wall: DKLB 01 Rombo & DKLB 05 Rombo Natural
Floor: DKLB 01 Natural

Wall: DKLB 06 3D Batonnet Décor Natural

Wall (left): DKLB 02 Versailles Décor Natural
Wall (right): DKLB 02 Chevron Natural

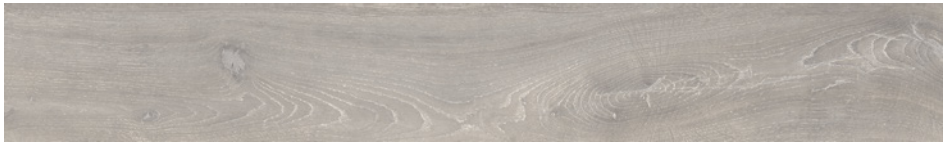

DKLB 01

DKLB 02

DKLB 03

DKLB 04

DKLB 05

Rombo

DKLB 01

DKLB 02

DKLB 03

DKLB 04

DKLB 05

Sizes

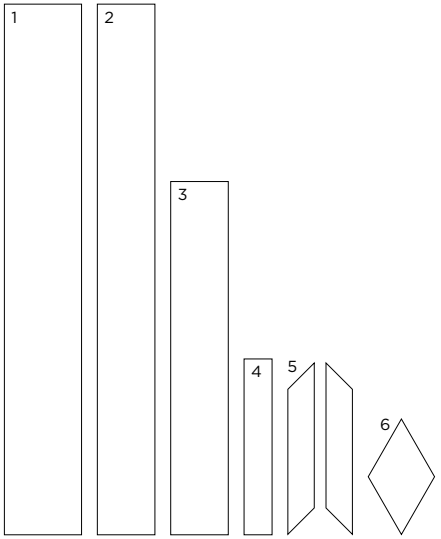

	Size (mm)	Thickness	Finish	Colour Availability
1	1797 x 263.3 (R)	10	Natural	DKLB 01, 02, 03, 04 & 05
2	1797 x 197 (R)	10	Natural	DKLB 01, 02, 03, 04 & 05
3	1197 x 197 (R)	10	Natural	DKLB 01, 02, 03, 04 & 05
4	597 x 97 (R)	10	Natural	DKLB 02
5	Chevron 585 x 90 (R)	10	Natural	DKLB 01, 02, 03, 04 & 05
6	Rombo 395 x 225 (R)	10	Natural	DKLB 01, 02, 03, 04 & 05

(R) Rectified size – squared edge with bevel. Mosaics and décors shown on next page.
Swatch colours may vary from original. Samples should be requested.

V2 – Moderate
Shade Variation

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Mosaics & Décors

Mosaic 1197 x 18mm

DKLB 01 Mosaic

DKLB 02 Mosaic

DKLB 03 Mosaic

DKLB 04 Mosaic

DKLB 05 Mosaic

Chevry Mosaic

DKLB 01 Chevry Mosaic

DKLB 02 Chevry Mosaic

DKLB 03 Chevry Mosaic

DKLB 04 Chevry Mosaic

DKLB 05 Chevry Mosaic

DKLB 06 Chevry Mosaic

3D Batonnet Décor

DKLB 06 3D Batonnet Décor

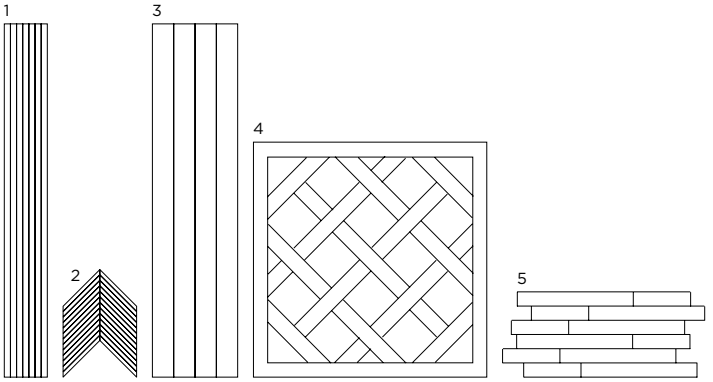

	Size (mm)	Thickness	Finish	Colour Availability
1	Mosaic 1197 x 18 (R) on 1197 x 147 sheet	10	Natural	DKLB 01, 02, 03, 04 & 05
2	Chevry Mosaic (R) on 297 x 297 sheet	10	Natural	DKLB 01, 02, 03, 04, 05 & 06
3	3D Baguette Décor 1197 x 290 (R)	10	Natural	DKLB 01, 02, 03 & 06
4	Versailles Décor 797 x 797 (R)	10	Natural	DKLB 01, 02, 03, 04 & 05
5	3D Batonnet Décor 585.4 x 290 (R)	10	Natural	DKLB 06

(R) Rectified size – squared edge with bevel. Special pieces shown on next page. Swatch colours may vary from original. Samples should be requested.

V2 – Moderate Shade Variation

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

3D Baguette Décor

DKLB 01 3D Baguette Décor

DKLB 02 3D Baguette Décor

DKLB 03 3D Baguette Décor

DKLB 06 3D Baguette Décor

Versailles Décor

DKLB 01 Versailles Décor

DKLB 02 Versailles Décor

DKLB 03 Versailles Décor

DKLB 04 Versailles Décor

DKLB 05 Versailles Décor

Bacchetta

Ottone

Special Pieces

	Size (mm)	Thickness	Finish	Colour Availability
1	Bacchetta 1199 x 80 (R)	10	Natural	Ottone
2	Skirting 597 x 46 (R)	10	Natural	All colours

(R) Rectified size – squared edge with bevel. Swatch colours may vary from original. Samples should be requested.

V2 – Moderate
Shade Variation

V2 – Moderate Shade Variation



DKLB 01 Natural

DKLB 02 Natural



DKLB 03 Natural

DKLB 04 Natural

DKLB 05 Natural

DKLB 01 Chevron Natural DKLB 02 Chevron Natural DKLB 03 Chevron Natural

DKLB 02 Versailles Décor Natural

DKLB 03 Versailles Décor Natural

DKLB 04 Versailles Décor Natural

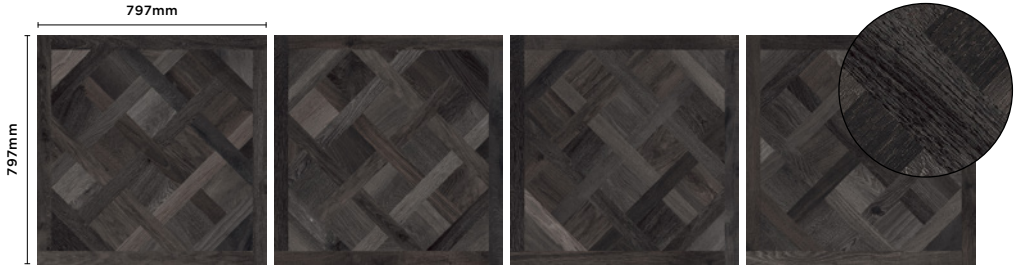

DKLB 05 Versailles Décor Natural

Les Bois

Technical Data

Product Type: Unglazed Porcelain (BS EN 14411 – Group Bla)
Use: Floors & Walls
Product Code: DKLB

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement (for nominal size *N*) 70mm ≤N<150mm	N ≥ 150mm	Actual Value
Length & width	BS EN ISO 10545-2	± 0.9mm	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 0.5mm	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%		Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN 16165 Annex B	R10 from 10° to 19°	Natural
Areas with bare feet	BS EN 16165 Annex A	A over 12° to 18°	Natural
Slip resistance (Pendulum) Coefficient of friction	BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0.08% (typical value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm^2	50 N/mm^2 (typical value)
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm ≥ 1300 N	2200 N (typical value)
Resistance to deep abrasion (unglazed tiles)	BS EN ISO 10545-6	≤ 175 mm^3	140 mm^3 (typical value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	ULA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	UHA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	UA
Stain resistance	BS EN ISO 10545-14	Declared value - unglazed	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	$A1_{FL}$/A1	$A1_{FL}$/A1
Recycled content			40%

ISO 9001 2015 ISO 14001 2015 ISO 50001 2018 RECYCLED CONTENT EPD®

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale.

September 2024

DOMUS
service@domusgroup.com | t: 020 8481 9500 | domusgroup.com