

Mews

Porcelain Design



Floor: DTME 09 Natural

9 Colours / 1 Finish / 4 Sizes

Mews is a porcelain tile range inspired by London's landscape, history and personality and the vast variety of textures in the infrastructure: bricks, wooden floors and irregular geometric patterns.

Design Barber & Osgerby

Mutina




Wall: DTME 03 & 04 Chevron Natural
Floor: DTME 06 Chevron Natural




Wall: DTME 01 Natural



Floor: DTME 08 Chevron Natural

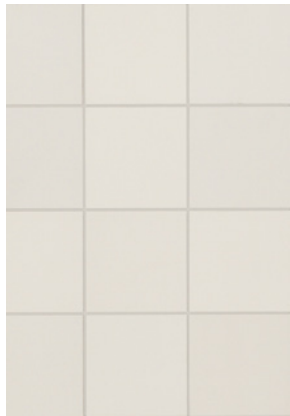


DTME 01

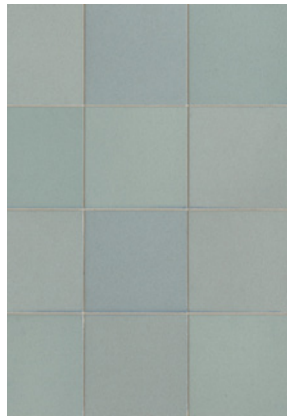

DTME 09




DTME 04

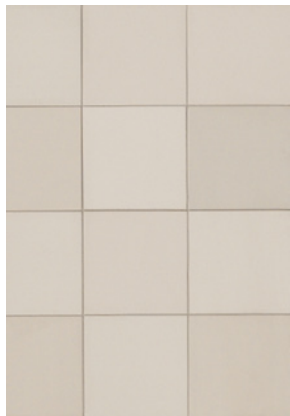


DTME 02




DTME 07

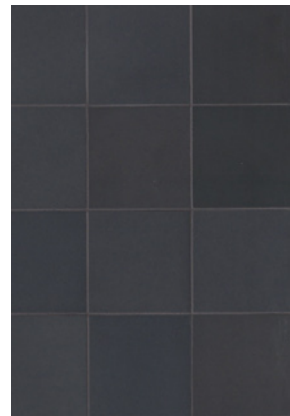


DTME 06

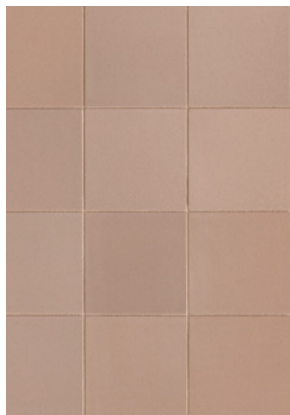

DTME 08

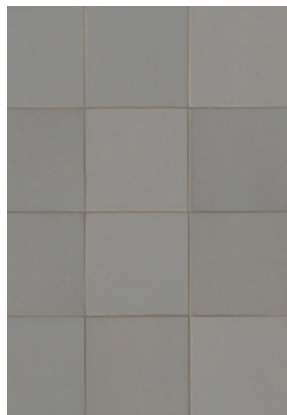


DTME 03

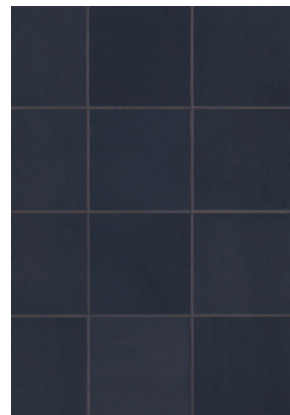


DTME 05

Sizes

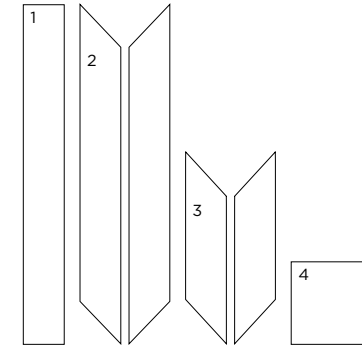


	Size (mm)	Thickness	Finish	Colour Availability
1	447 x 53 (R)	10	Natural	All colours
2	Chevron 393 x 53 (R)	10	Natural	All colours
3	Chevron 192 x 53 (R)	10	Natural	All colours
4	110 x 110 (R)	10	Natural	All colours
	Plinth Skirting 447 x 38 (R)	10	Natural	All colours
	Step Tread 447 x 334 x 45 (R)	10	Natural	All colours
	Angle Step Tread 330 x 330 x 45 (R)	10	Natural	All colours

(R) Rectified size - square edge with bevel. Swatch colours may vary from original. Samples should be requested. Chevron Left and Chevron Right pieces come equally mixed in a box.




V4 - Random Shade Variation

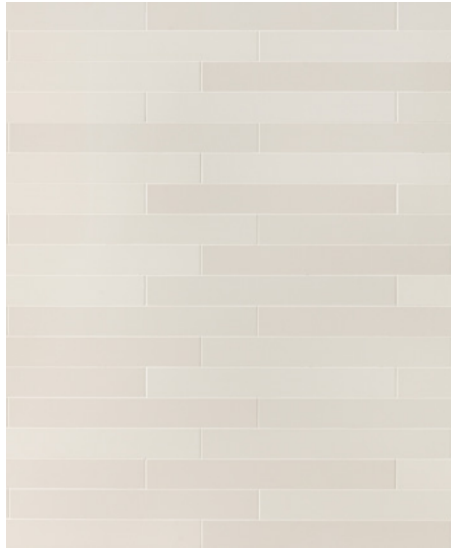


DTME 01



DTME 02

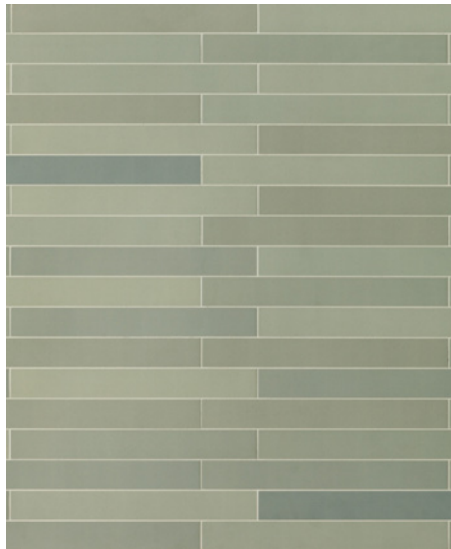


DTME 07

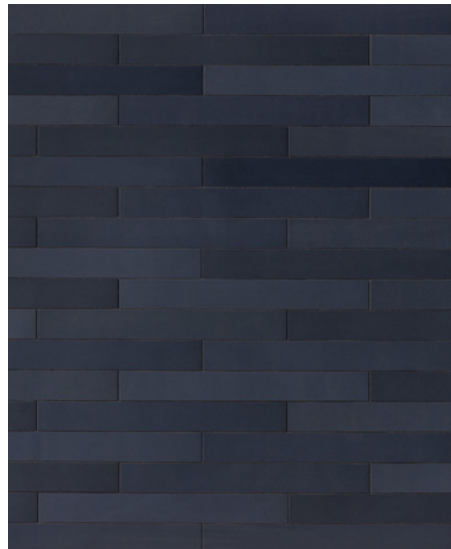

DTME 05




DTME 09 Chevron

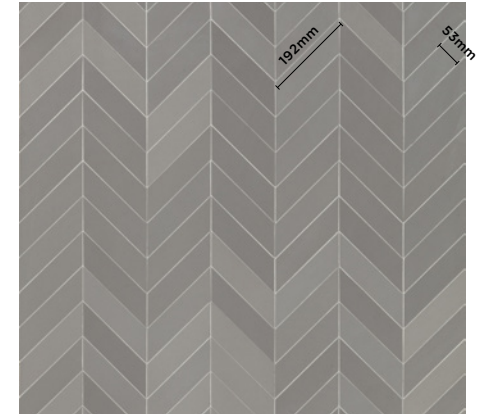

DTME 03 Chevron




DTME 07 Chevron

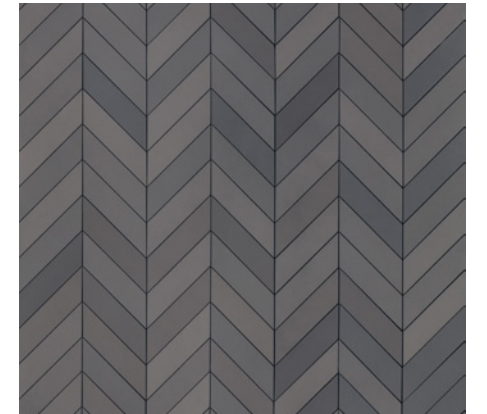

DTME 04 Chevron



DTME 08 Chevron

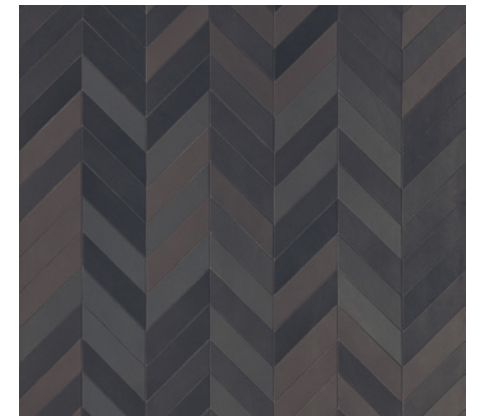

DTME 06 Chevron

Mews

Technical Data

Use: Floors & Walls

Product Code: DTME

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement (for nominal size <i>N</i>)		Actual Value
		70mm ≤N<150mm	N ≥ 150mm	
Length & width	BS EN ISO 10545-2	± 0.9mm	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 0.5mm	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%		Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R10 from 10° to 19°	Natural
Slip resistance Coefficient of friction	BS 7976-2	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	≤ 0.04% (typical value)
Breaking strength	BS EN ISO 10545-4	≥ 1300 N	Conforms
Resistance to surface abrasion (glazed tiles)	BS EN ISO 10545-7	PEI *see classifications below	Class 4 - DTME 01, 02 & 03 Class 3 - DTME 04, 05 & 06
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	A1 _{FL} /A1
Recycled content			13.8% - 15.3%

***PEI classifications**
 PEI 1 - Very light traffic
 PEI 2 - Light traffic
 PEI 3 - Light to moderate traffic
 PEI 4 - Moderate to heavy traffic
 PEI 5 - Heavy to extra heavy traffic



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. Oct. 2021

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com