

Woodslate Life

Porcelain Wood / Porcelain Stone



Balcony Floor: DFWD 01 Chevron Natural

Floor: DFWS 02 Natural

Feature Wall: DFWS 01 & 02 Idrogetto Décor Natural

8 Colours / 2 Finishes / 5 Sizes / 2 Mosaics / 1 Décor

Inspired by the 'modern farmhouse' style, Woodslate Life combines rustic, relaxing elements with neutral colours to create airy, rigorous spaces. The combination of wood-effect and slate-effect tiles brings about the authenticity and warmth of a lost world, refashioning it with contemporary sobriety.



Floor: DFWD 04 Natural



Wall: DFWD 04 3D Wood Slat Mosaic Natural
Floor: DFWS 02 Natural




Outdoor Floor: DFWD 02 Grip
Indoor Floor: DFWD 02 Natural



DFWD 01



DFWD 02



DFWD 03



DFWD 04



DFWS 01



DFWS 02




DFWS 03



DFWS 04

Sizes

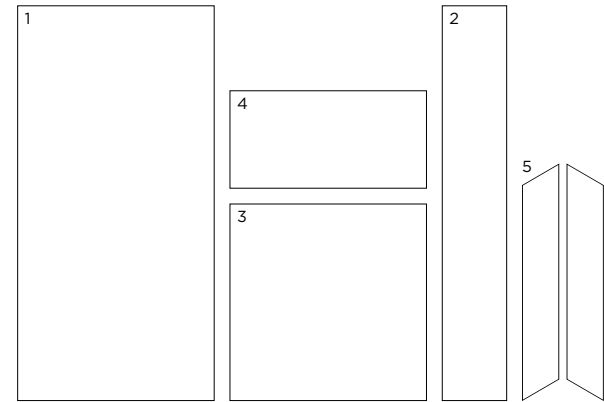

	Size (mm)	Thickness	Finish	Colour Availability
1	1197 x 597 (R)	9	Natural Grip	All DFWS colours All DFWS colours
2	1197 x 197 (R)	9	Natural Grip	All DFWD colours All DFWD colours
3	597 x 597 (R)	9	Natural	All DFWS colours
4	597 x 297 (R)	9	Natural	All DFWS colours
5	Chevron 532 x 90 (R)	9	Natural	All DFWD colours

(R) Rectified size - square edge with bevel. Swatch colours may vary from original. Samples should be requested. There are 8 chevron left pieces and 8 chevron right pieces equally mixed in a box and cannot be purchased separately. Each chevron piece measures 585mm from point-to-point. Mosaics, décors and special pieces shown on next page.

3D Wood Slat Mosaic



DFWD 01 3D Wood Slat Mosaic



DFWD 02 3D Wood Slat Mosaic



DFWD 04 3D Wood Slat Mosaic



DFWD 04 3D Wood Slat Mosaic


3D Muretto Mosaic




DFWS 01 3D Muretto Mosaic



DFWS 02 3D Muretto Mosaic

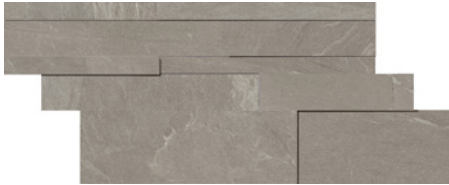

DFWS 04 3D Muretto Mosaic

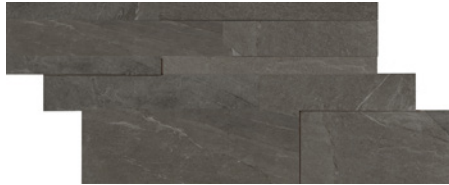

DFWS 04 3D Muretto Mosaic

Idrogetto Décor




Mix of DFWS 01 & 02



MIX OF DFWS 03 & 04

Mosaics, Décors & Special Pieces

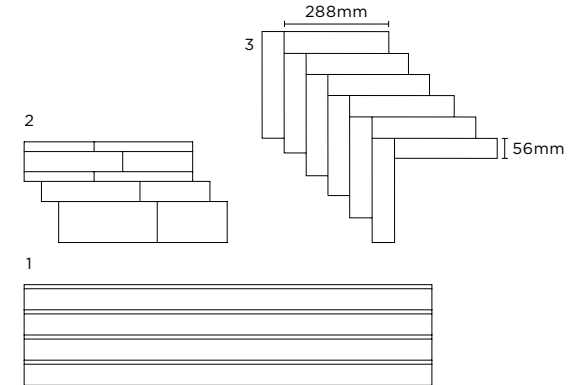

	Size (mm)	Thickness	Finish	Colour Availability
1	3D Wood Slat Mosaic (R) on 1197 x 297 sheet	9	Natural	All DFWD colours
2	3D Muretto Mosaic (R) on 597 x 297 sheet	9	Natural	All DFWS colours
3	Idrogetto Décor 636 x 578 (R)	9	Natural	Mix of DFWS 01 & 02 Mix of DFWS 03 & 04
	Skirting 597 x 46	9	Natural	All colours
	Bullnose Step Tread 1197 x 330 x 30	9	Natural	All DFWS colours


(R) Rectified size – square edge with bevel. Swatch colours may vary from original. Samples should be requested. There are 8 chevron left pieces and 8 chevron right pieces equally mixed in a box and cannot be purchased separately. Mosaics shown on next page.

V3 - High Shade Variation



DFWS 01 Natural


DFWS Colours (Stone Effect)

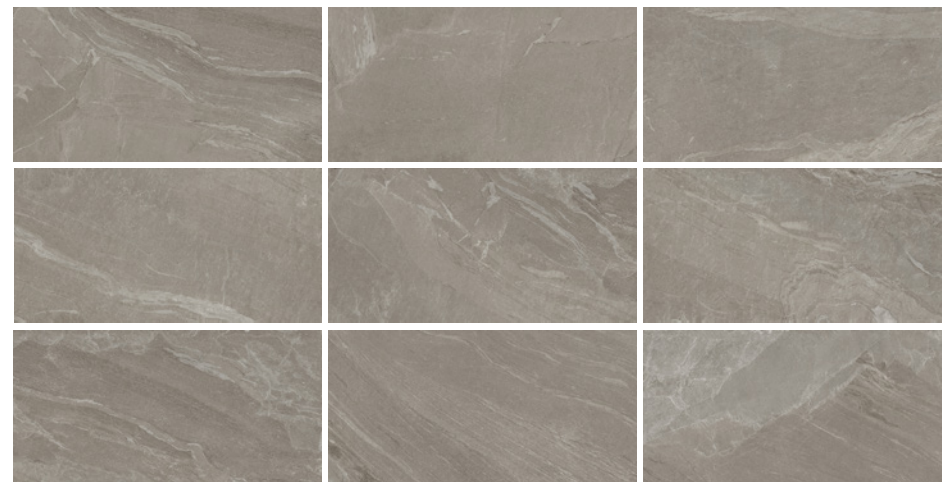

DFWS 03 Natural



DFWS 02 Natural

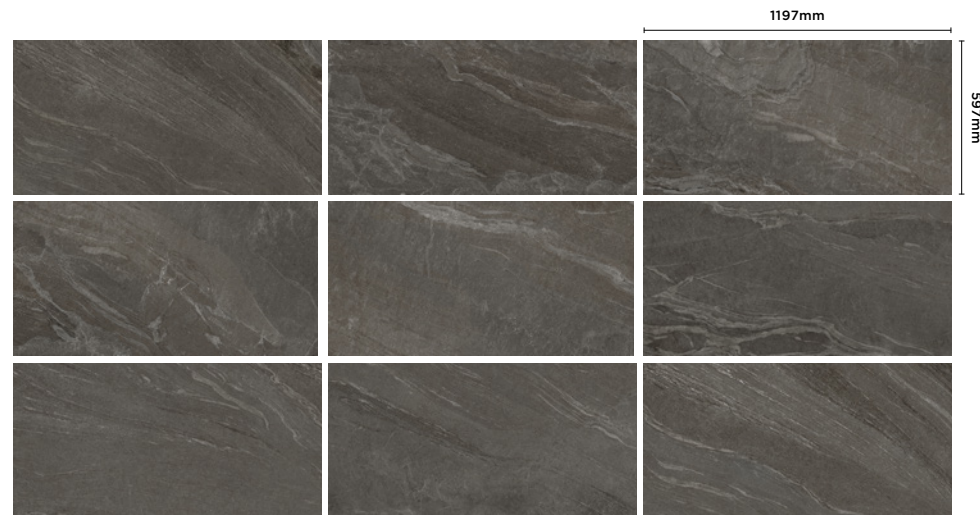


DFWS 04 Natural

V3 - High Shade Variation



DFWD 01 Natural

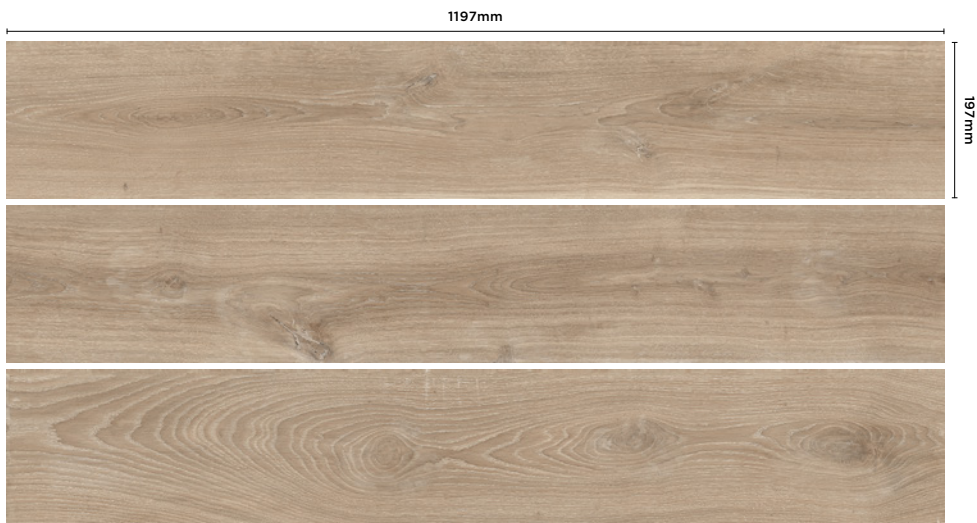


DFWD 02 Natural

DFWD Colours (Wood Effect)



DFWD 03 Natural

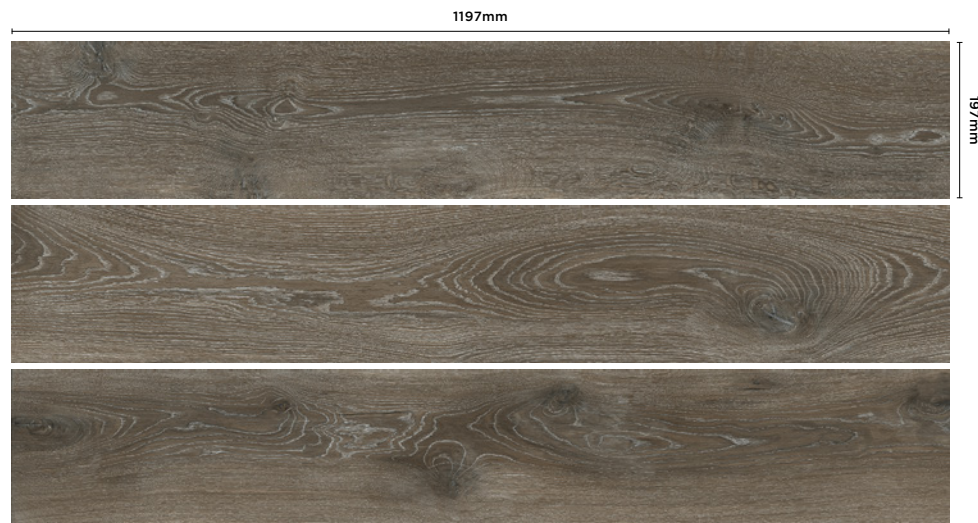

DFWD 04 Natural

Woodslate Life

Technical Data

Product Type: Unglazed Porcelain (BS EN 14411 – Group BIa)

Use: *Floors & Walls

*** NOTE – 3D Wood Slat & Muretto Mosaics are for walls only**

Product Code: DFWD & DFWS

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R10 from 10° to 19° R11 from 19° to 27°	Natural Grip
Areas with bare feet	DIN 51097	B over 18° to 24° C over 24°	Natural Grip
Slip resistance (Pendulum) Coefficient of friction	BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0.08% (Typical value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	50 N/mm ³ (Typical value)
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm ≥ 1300 N	2200 N (Typical value)
Resistance to deep abrasion (unglazed tiles)	BS EN ISO 10545-6	≤ 175 mm ³	140 mm ³ (Typical value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	ULA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	UA
Stain resistance	BS EN ISO 10545-14	Declared value - unglazed	Class 4-5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	A1 _{FL} /A1
Recycled content			20.5%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale.
January 2025