

Nautilus Wall

Ceramic Design



Wall (left): DANIW 03 Soft
Wall (right): DANIW 03 Layer Décor Soft




3 Colours / 1 Finish / 2 Sizes / 2 Décors

Nautilus Wall is a range of stone-look ceramic wall tiles that combines natural beauty and technology to create elegant and timeless spaces. This range seamlessly merges the essence of stone with ceramic innovation, creating unique and characterful spaces. Refer to Nautilus for coordinating porcelain tiles.



DANIW 01

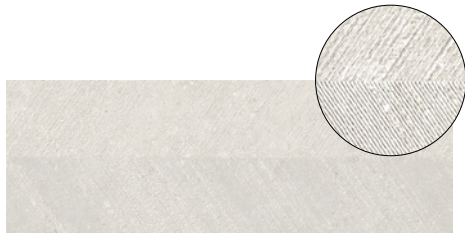

DANIW 01 Bolt Décor




DANIW 02



DANIW 02 Bolt Décor



DANIW 03

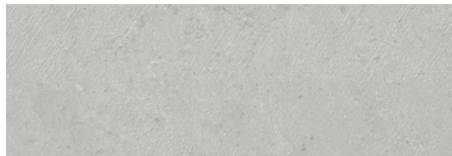

DANIW 03 Bolt Décor



DANIW 01 Layer Décor




DANIW 02 Layer Décor




DANIW 03 Layer Décor

Sizes

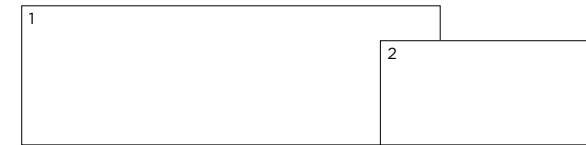

	Size (mm)	Thickness	Finish	Colour Availability
1	1200 x 400 (R)	7	Soft	All colours
	Bolt Décor 1200 x 400 (R)	8	Soft	All colours
2	600 x 300 (R)	7	Soft	All colours
	Layer Décor 600 x 300 (R)	7	Soft	All colours

(R) Rectified size - square edge with bevel. Recommended for use on walls only. Swatch colours may vary from original. Samples should be requested.



V2 - Moderate
Shade Variation

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Nautilus Wall

Technical Data

Product Type: Glazed Ceramic (BS EN 14411 – Group BII)

Use: Walls (Internal only)

Product Code: DANIW

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 10% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.30% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness): Centre curvature	BS EN ISO 10545-2	+ 0.5% (max. + 2.0mm) - 0.3% (max. - 1.5mm)	Conforms
Edge curvature	BS EN ISO 10545-2	+ 0.5% (max. + 2.0mm) - 0.3% (max. - 1.5mm)	Conforms
Warpage	BS EN ISO 10545-2	± 0.5% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	> 10%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	< 7.5mm thick ≥ 15 N/mm ²	Conforms
Breaking strength	BS EN ISO 10545-4	< 7.5mm thick ≥ 200 N	Conforms
Linear thermal expansion coefficient	BS EN ISO 10545-8	Declared value	≤ 9 x 10 ⁻⁶ / °C (Typical value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	Resistant
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	Resistant
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Resistant
Reaction to fire	Based on the decision 96/603/EC and its changes	A1	A1
Recycled content			29%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. October 2025

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com