

Gleam

Porcelain Stone



Floor: DCG 01 Grip

4 Colours / 3 Finishes / 5 Sizes

Gleam interprets the warmth of Mediterranean limestone, with soft tonal variation and subtle texture reminiscent of sun-weathered stone. The result is a calm, light-filled surface that brings understated elegance to interiors, with warm tones and versatile formats suited to residential, hospitality, and commercial spaces.



Floor: DCG 04 Honed

Sizes



DCG 01




DCG 02



DCG 03




DCG 04

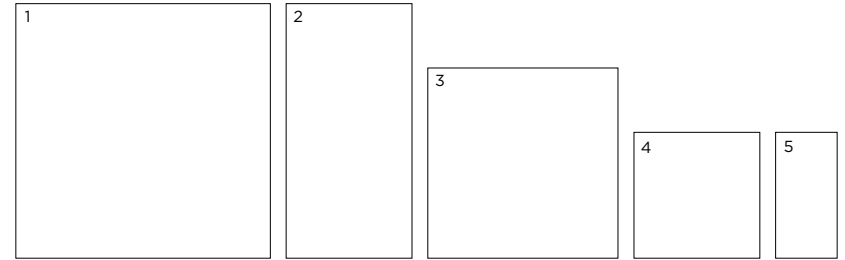

	Size (mm)	Thickness	Finish	Colour Availability
1	1198 x 1198 (R)	9	Natural	All colours
			Honed	All colours
			Grip	DCG 01 & 02
2	1198 x 598 (R)	9	Natural	All colours
			Honed	All colours
			Grip	All colours
	Stilos Décor 1198 x 598 (R)	9	Natural	All colours
3	898 x 898 (R)	9	Natural	All colours
			Honed	All colours
4	598 x 598 (R)	9	Natural	All colours
			Honed	All colours
			Grip	All colours
5	598 x 298 (R)	9	Natural	All colours

(R) Rectified size - square edge with bevel. Swatch colours may vary from original. Samples should be requested. Special pieces shown on next page.

Special Pieces

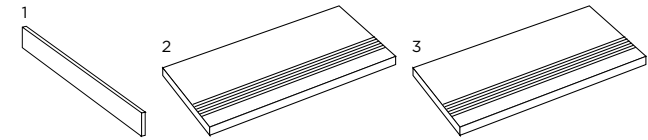

	Size (mm)	Thickness	Finish	Colour Availability
1	Bullnose Bevelled Edge Skirting 598 x 55	9	Natural	All colours
			Honed	All colours
2	Grooved Step Tread 1198 x 300	9	Natural	All colours
			Honed	All colours
			Grip	All colours
3	Grooved Step Tread 598 x 300	9	Natural	All colours
			Honed	All colours
			Grip	All colours

Swatch colours may vary from original. Samples should be requested.

Gleam

Technical Data

Product Code: DCG

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN 16165 Annex B	R10 from 10° to 19° R11 from 19° to 27°	Natural Grip
Areas with bare feet	BS EN 16165 Annex A	B over 18° to 24° C over 24°	Natural Grip
Slip resistance (Pendulum) Coefficient of friction	BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0.05% (Average value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	50 N/mm ² (Average value)
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm ≥ 1300 N	2200 N (Average value)
Resistance to deep abrasion (unglazed tiles)	BS EN ISO 10545-6	≤ 175 mm ³	145 mm ³ (Average value)
Linear thermal expansion coefficient	BS EN ISO 10545-8	Declared value	≤ 7 x 10 ⁻⁶ °C ⁻¹ (Average value)
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	ULA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	UHA
Stain resistance	BS EN ISO 10545-14	Declared value - unglazed	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	A1 _{FL} /A1
Recycled content			≥ 40%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. April 2026

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com