

Etoile

Porcelain Marble



Floor: DREL 04 Glossy

4 Colours / 2 Finishes / 2 Sizes / 2 Mosaics

Sophisticated and elegant, Etoile is a porcelain tile range that offers soft and shimmering surfaces. The range is inspired by a selection of new and rare marbles, with a strong decorative impact, that originate from distant geographical areas. View Etoile Magnum for 6mm-thick slab options.




Floor: DREL 02 Matt

Sizes



DREL 01

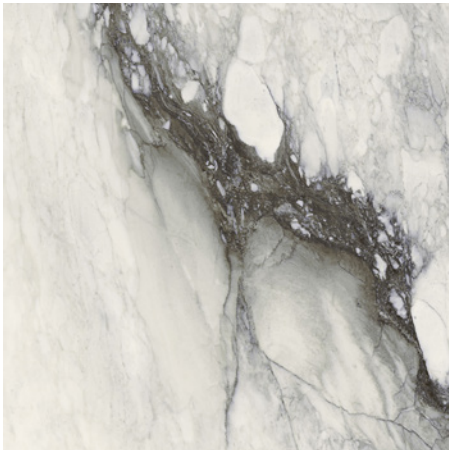


DREL 02



DREL 03



DREL 04

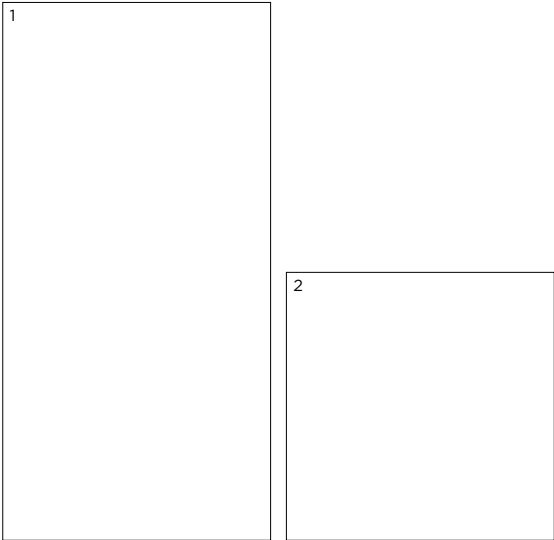

	Size (mm)	Thickness	Finish	Colour Availability
1	1197 x 597 (R)	9	Matt	All colours
			Glossy	All colours
2	597 x 597 (R)	9	Matt	All colours
			Glossy	All colours

(R) Rectified size - square edge with bevel. Mosaics and special pieces shown on next page. Swatch colours may vary from original. Samples should be requested.

DREL 04



DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Mosaics & Special Pieces

[illegible]

	Size (mm)	Thickness	Finish	Colour Availability
1	Mosaic 147 x 27 on 297 x 297 sheet	9	Matt Glossy	All colours All colours
2	3D Mosaic 27 x 27 on 297 x 297 sheet	9	Mix*	All colours
	Plinth Skirting 597 x 46 (R)	9	Matt Glossy	All colours All colours
	Bullnose Step Tread 1197 x 33 x 30 (R)	9	Matt Glossy	All colours All colours

(R) Rectified size - square edge with bevel. *Mix finish is a mix of Matt and Glossy finishes. Swatch colours may vary from original. Samples should be requested.

Etoile

Technical Data

Product Type: Glazed Porcelain (BS EN 14411 – Group Bla)

Use: Floors & Walls

Product Code: DREL

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	± 0.15%
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	± 5%
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	± 0.1%
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	± 0.2%
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	± 0.35%
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	
Slip resistance	BS 7976-2	Test results upon request
Coefficient of friction	BS EN 16165	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0.08% (average value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	50 N/mm ² (average value)
Breaking strength	BS EN ISO 10545-4	≥ 1300 N	3200 N (average value)
Resistance to surface abrasion (of glazed tiles)	BS EN ISO 10545-7	PEI *see classifications below	Class 4
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA – Matt GLB – Glossy
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Class 4 – Glossy Class 4-5 – Matt
Reaction to fire	Based on the decision 96/603/CE and its changes	A1 _{FL} /A1	A1 _{FL} /A1
Recycled content			20.5%

***PEI classifications**
PEI 2 - Light traffic
PEI 3 - Light to moderate traffic
PEI 4 - Moderate to heavy traffic
PEI 5 - Heavy to extra heavy traffic



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. March 2023