

Eccentric Luxe Magnum

Lightweight Slabs / Porcelain Marble



6 Colours / **1** Finish / **4** Sizes / **1** Mosaic

Inspired by the grandeur of exclusive settings, Eccentric Luxe Magnum captures the inherent luxury of onyx. This lightweight porcelain slab range is based on a virtuous, sustainable approach and is part of Florim's 'CarbonZero' selection of Climate-Positive surfaces, which reduce the amount of CO₂ in the atmosphere.






Wall & Floor: DMAG 243 Glossy



Wall (front) & Floor: DMAG 244 Glossy

Wall (back & feature strips): DMAG 246 Glossy

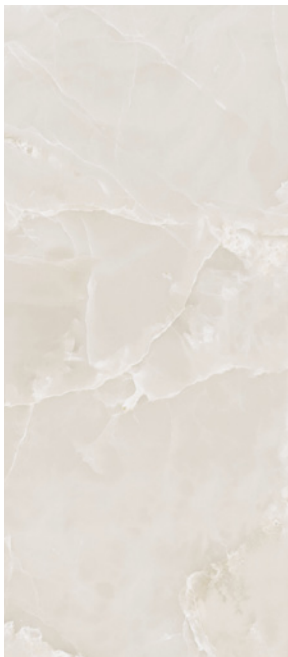


DMAG 242



DMAG 244



DMAG 245

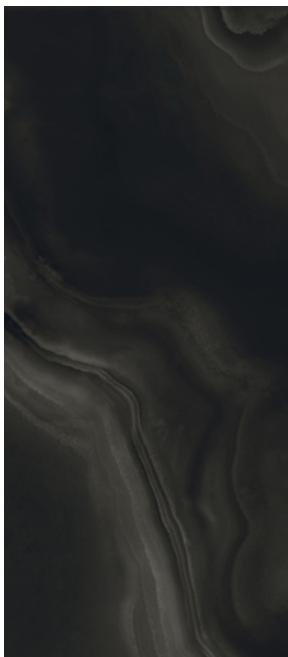

DMAG 243




DMAG 246



DMAG 247

Sizes

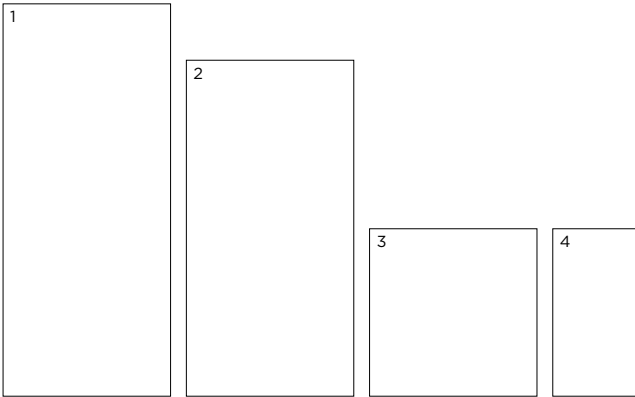

	Size (mm)	Thickness	Finish	Colour Availability
1	2797 x 1197 (R)	6	Glossy	All colours
2	2397 x 1197 (R)	6	Glossy	DMAG 242 & 243
3	1197 x 1197 (R)	6	Glossy	DMAG 242 & 243
4	1197 x 597 (R)	6	Glossy	DMAG 242 & 243


(R) Rectified size – square edge with bevel. Mosaics and special pieces shown on next page. Swatch colours may vary from original. Samples should be requested.

V2 Moderate - V4 Random
Shade Variation

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Charm Mosaic

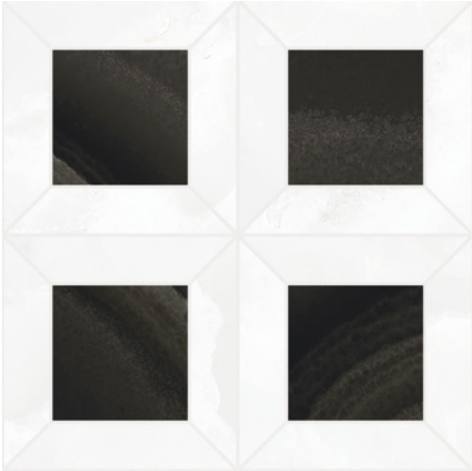


Mix of DMAG 242 & 243




Wall: DMAG 242 Glossy & DMAG Charm Mosaic Glossy

Mosaics

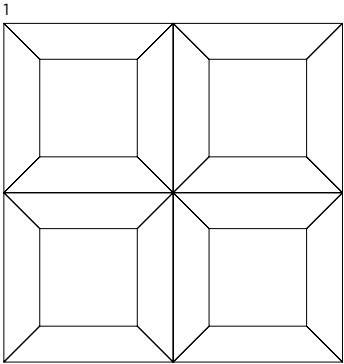

	Size (mm)	Thickness	Finish	Colour Availability
1	Charm Mosaic on 259 x 259 sheet	6	Glossy	Mix of DMAG 242 & 243


Swatch colours may vary from original. Samples should be requested.




V4 – Random Shade Variation




DMAG 244 Glossy

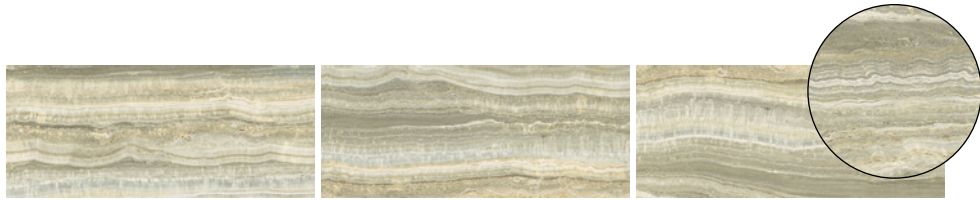

DMAG 245 Glossy

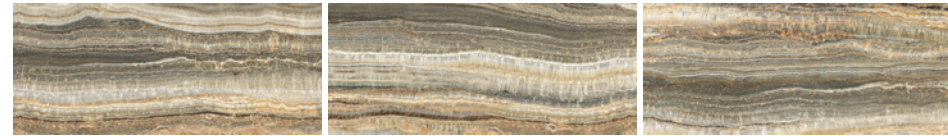


DMAG 246 Glossy

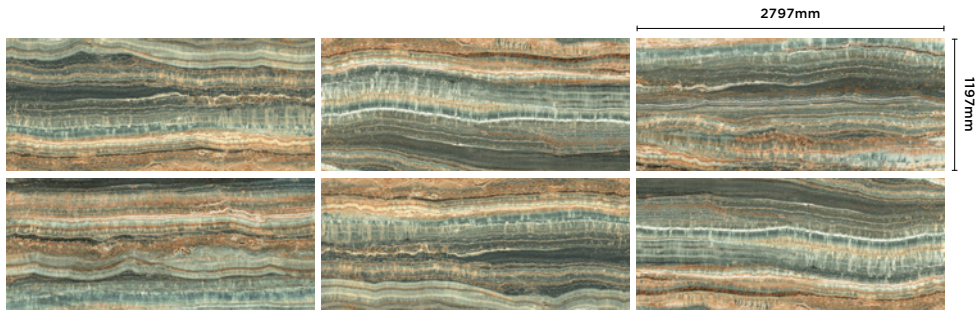


DMAG 247 Glossy

V2 – Moderate Shade Variation

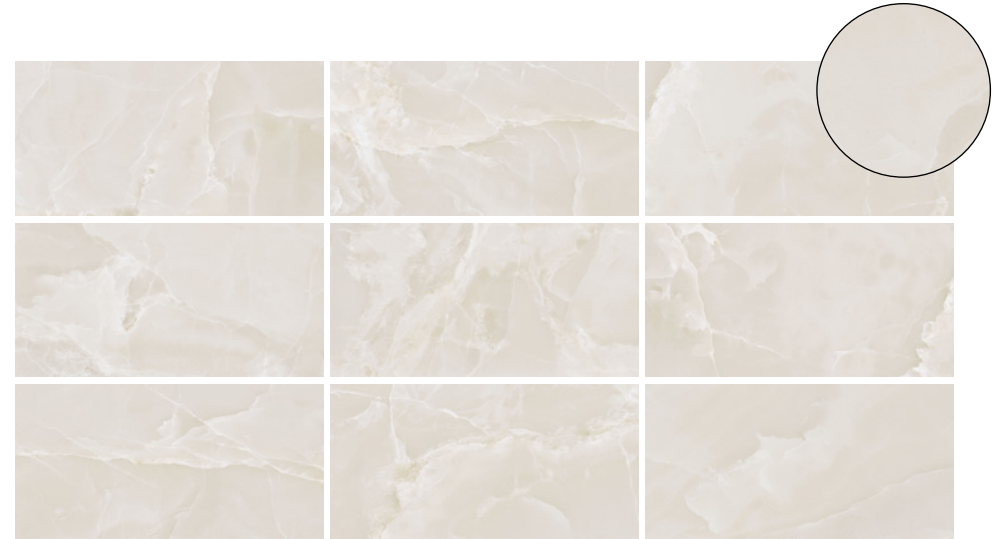

DMAG 242 Glossy

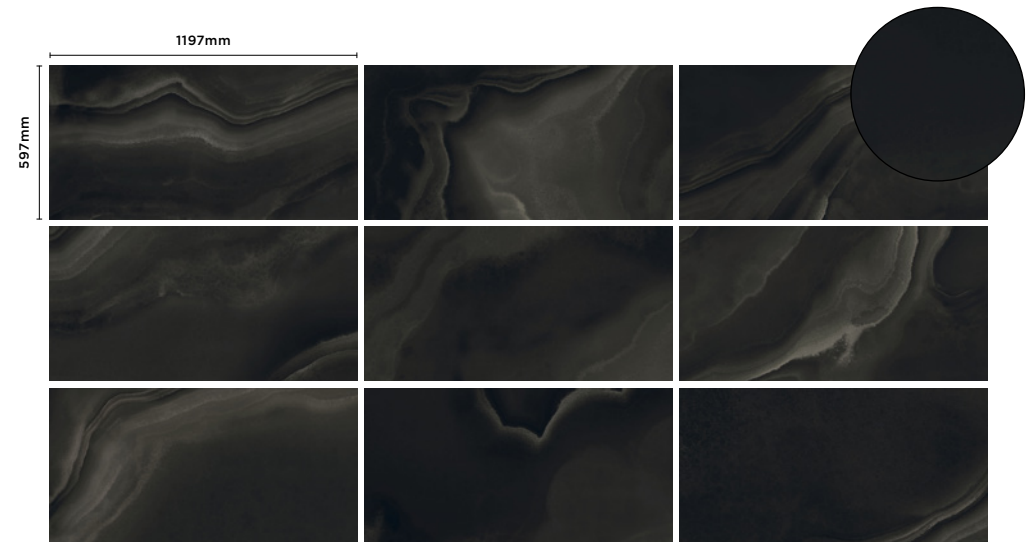

DMAG 243 Glossy

Eccentric Luxe Magnum

Technical Data

Product Type: Unglazed Porcelain (BS EN 14411 – Group Bla)
Use: Floors & Walls
Product Code: DMAG

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Slip resistance (Pendulum) Coefficient of friction	BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0.08 (Average Value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm²	52 N/mm² (Average Value)
Breaking strength	BS EN ISO 10545-4	< 7.5mm ≥ 700 N	1350 N (Average Value)
Resistance to deep abrasion (unglazed tiles)	BS EN ISO 10545-6	≤ 175 mm³	140 mm³ (Average Value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	ULB
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	UA
Stain resistance	BS EN ISO 10545-14	Declared value - unglazed	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	A1 _{FL} /A1
Recycled content			5.8% - DMAG 242, 244, 245 & 11% - DMAG 243 & 247



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale.
April 2025