

Eccentric Luxe

Porcelain Marble



Wall: DREX 01 Glossy

6 Colours / 2 Finishes / 2 Sizes

Inspired by the grandeur of exclusive settings, Eccentric Luxe captures the captivating beauty and inherent luxury of onyx. This porcelain tile range is based on a virtuous, sustainable approach and is part of Florim's 'CarbonZero' selection of Climate-Positive surfaces, which reduce the amount of CO₂ in the atmosphere.



Floor & Sink: DREX 02 Comfort PTV
Wall: DREX 01 Glossy



Wall & Floor: DREX 01 Glossy



Wall: DREX 01 Glossy

Sizes




DREX 01



DREX 03



DREX 04

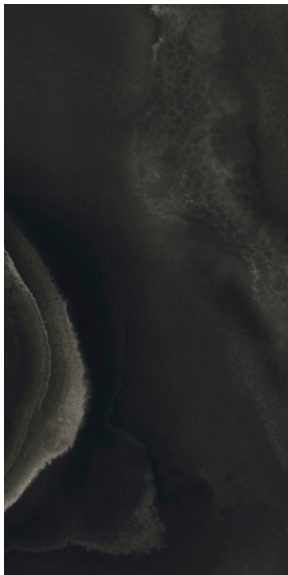


DREX 02



DREX 05



DREX 06

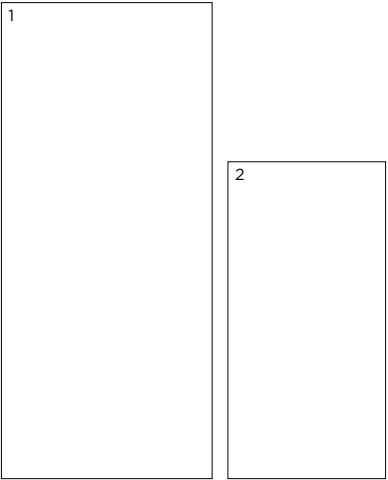

	Size (mm)	Thickness	Finish	Colour Availability
1	1797 x 797 (R)	9	Glossy	All colours
2	1197 x 597 (R)	9	Comfort PTV Glossy	All colours All colours
	Plinth Skirting 1197 x 46	9	Glossy	All colours
	Bullnose Step Tread 1197 x 33	30	Glossy	All colours

(R) Rectified size – square edge with bevel. Swatch colours may vary from original.
Samples should be requested.

V2 Moderate - V4 Random
Shade Variation


DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com


V4 - Random Shade Variation




DREX 03 Comfort PTV

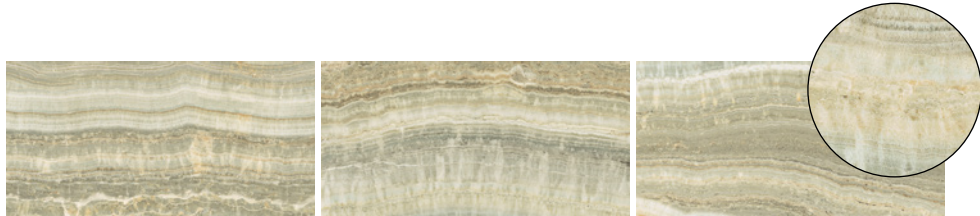

DREX 04 Glossy

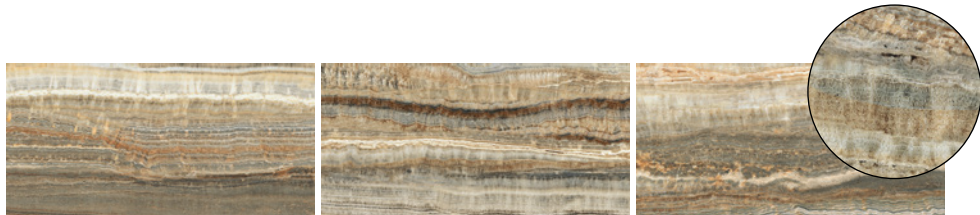


DREX 05 Comfort PTV

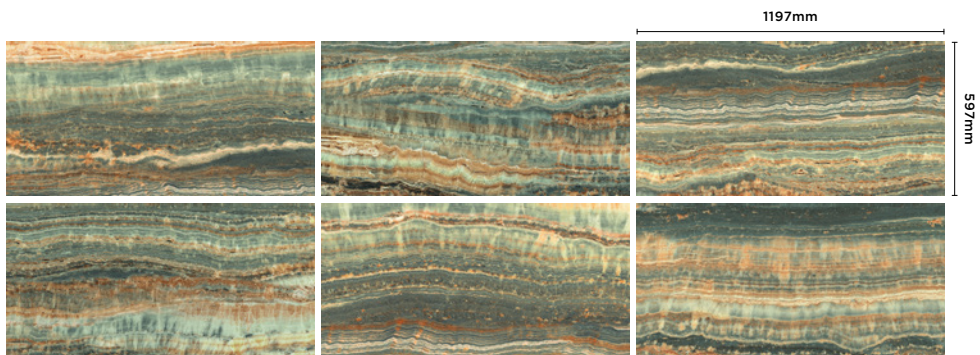


DREX 06 Glossy

V2 - Moderate Shade Variation

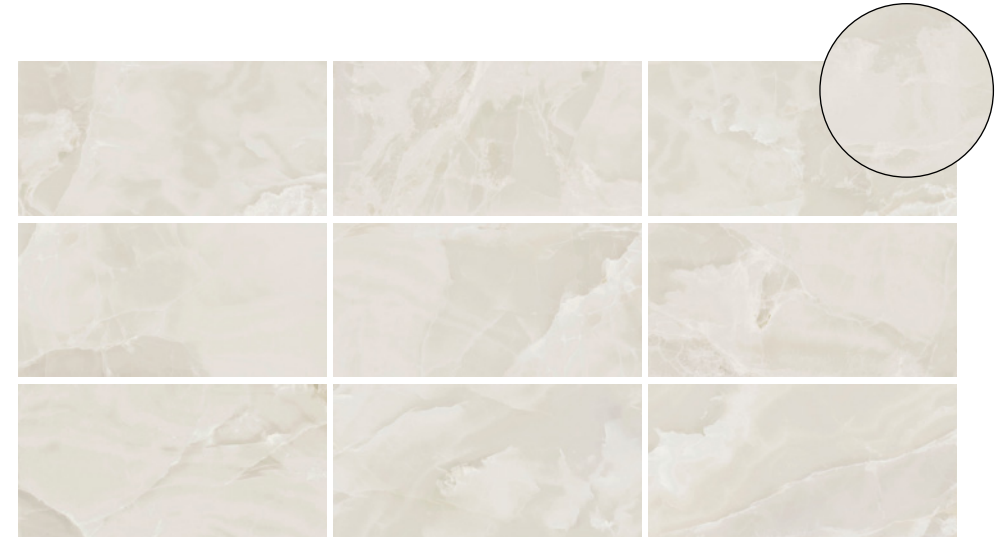

DREX 01 Comfort PTV

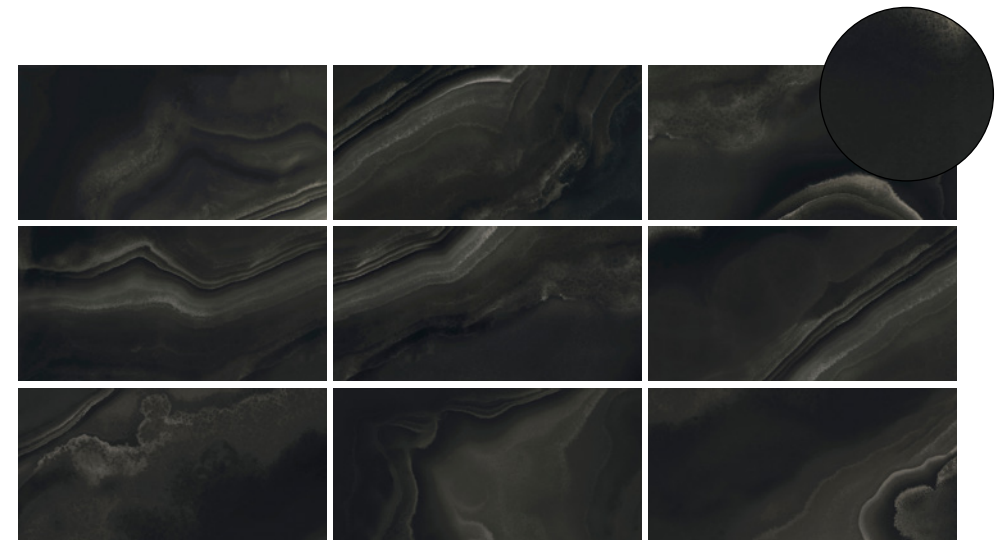

DREX 02 Glossy

Eccentric Luxe

Technical Data

Product Type: Unglazed Porcelain (BS EN 14411 – Group Bla)
Use: Floors & Walls
Product Code: DREX

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN 16165 Annex B	R10 from 10° to 19°	Comfort PTV
Areas with bare feet	BS EN 16165 Annex A	B over 18° to 24°	Comfort PTV
Slip resistance (Pendulum) Coefficient of friction	BS EN 16165 Annex C	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0.08% (Average Value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm²	50 N/mm² (Average Value)
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm ≥ 1300 N	2200 N (Average Value)
Resistance to deep abrasion (unglazed tiles)	BS EN ISO 10545-6	≤ 175 mm³	140 mm³ (Average Value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	ULA – Comfort PTV ULB – Glossy
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	UHA – Comfort PTV UHB – Glossy
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	UA
Stain resistance	BS EN ISO 10545-14	Declared value - unglazed	Class 4
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	A1 _{FL} /A1
Recycled content			22.5%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale.
April 2025