Truth 2.0

Porcelain Stone

Wall & Floor: DFALS 02 Matt Leather

4 Colours / **5** Finishes / **4** Sizes

Truth 2.0 is designed for the creation of exclusive environments, fostering a sense of well-being and tranquillity without unnecessary extravagance. This porcelain tile range features a comprehensive palette of stone-look colours, offering exceptional stylistic versatility.

Wall & Floor: DFALS 04 Matt Silk

Sizes

DFALS 01

DFALS 02

DFALS 03

DFALS 04

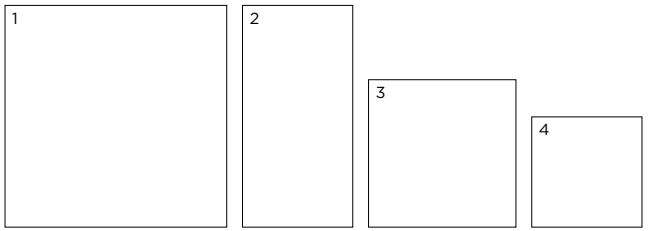

	Size (mm)	Thickness	Finish	Colour Availability
1	1197 x 1197 (R)	9	Matt	DFALS 04
			Matt Leather	DFALS 01, 02 & 03
			Matt Silk	All colours
2	1197 x 597 (R)	9	Matt	DFALS 04
			Matt Leather	DFALS 01, 02 & 03
			Matt Silk	All colours
			Grip	DFALS 03 & 04
			Cannete	All colours
3	797 x 797 (R)	9	Matt	DFALS 04
			Matt Leather	DFALS 01, 02 & 03
			Matt Leather (Rustic Edge)	DFALS 01, 02 & 03
			Matt Silk	DFALS 04
			Matt Silk (Rustic Edge)	DFALS 04
			Grip	All colours
4	597 x 597 (R)	9	Matt	DFALS 04
			Matt Leather	DFALS 01, 02 & 03
			Matt Leather (Rustic Edge)	DFALS 01, 02 & 03
			Matt Silk	DFALS 04
			Matt Silk (Rustic Edge)	DFALS 04

(R) Rectified size – square edge with bevel. Special pieces shown on next page.
Swatch colours may vary from original. Samples should be requested.

V2 Moderate – V3 High
Shade Variation

DOMUS
service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Rustic Edge

DFALS 01

DFALS 02

DFALS 03

DFALS 04

In addition to standard rectified edges, select formats (797 x 797mm and 597 x 597mm) are available with a rustic edge detail, giving the porcelain a more handcrafted, organic, and aged stone look.

Special Pieces

	Size (mm)	Thickness	Finish	Colour Availability
1	Plinth Skirting 1197 x 46	9	Matt	DFALS 04
			Matt Leather	DFALS 01, 02 & 03
			Matt Silk	DFALS 04
2	Squared Step Tread 1197 x 33 x 30	9	Matt	DFALS 04
			Matt Leather	DFALS 01, 02 & 03
			Matt Silk	DFALS 04

Swatch colours may vary from original. Samples should be requested.

V2 Moderate – V3 High
Shade Variation

V2 – Moderate Shade Variation

DFALS 01 Matt Leather

DFALS 02 Matt Leather

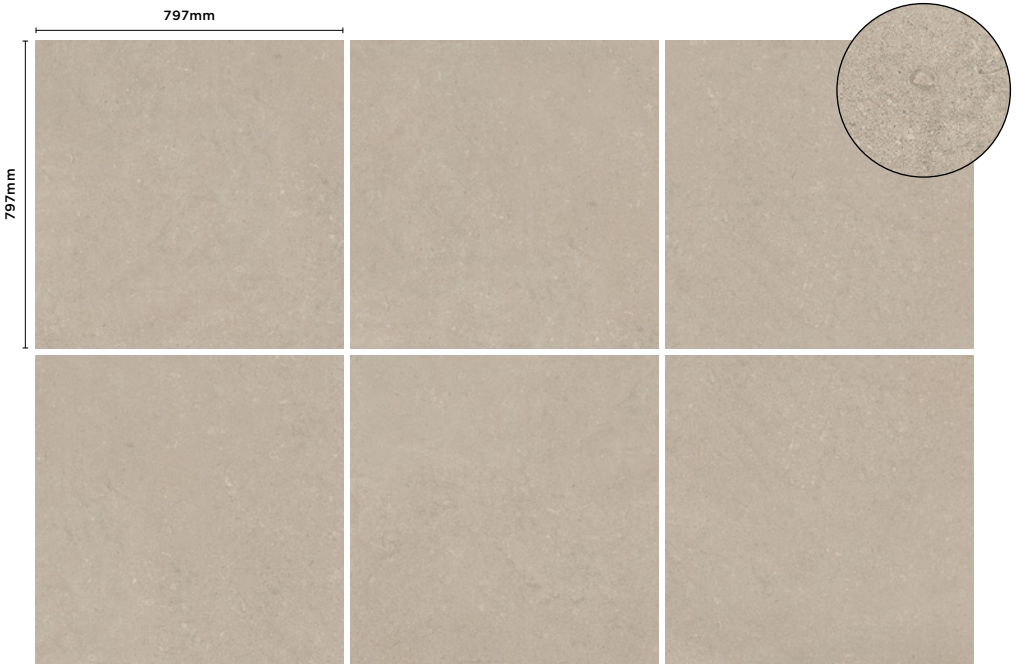

DFALS 03 Grip

DFALS 03 Matt Leather

V3 – High Shade Variation

DFALS 04 Cannete

DFALS 04 Grip

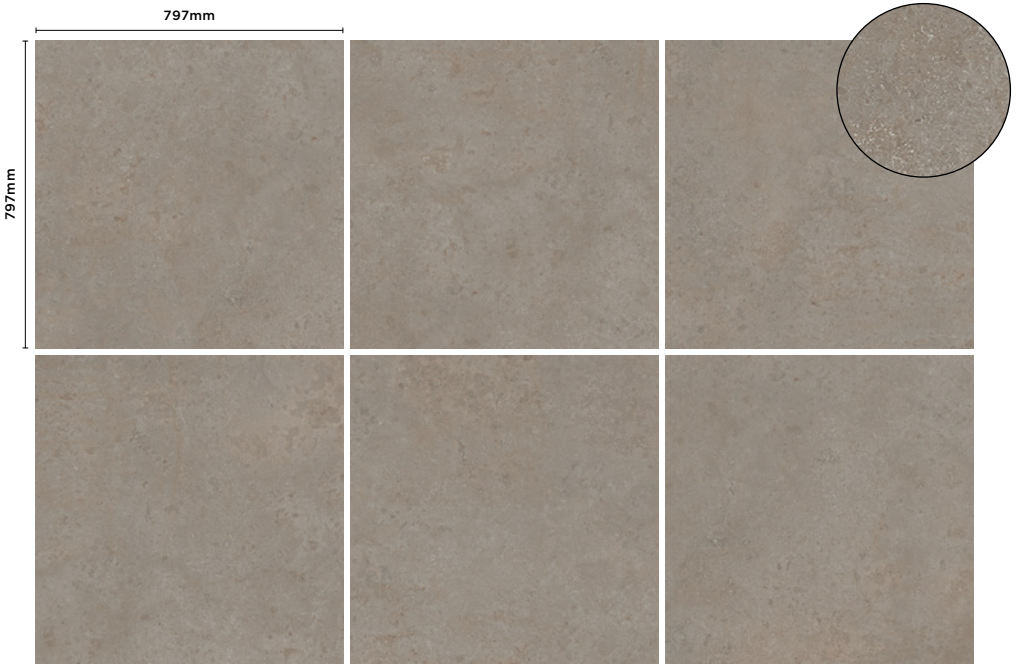

DFALS 04 Matt Silk

DFALS 04 Matt

Truth 2.0

Technical Data

Product Type: Unglazed Porcelain (BS EN 14411 – Group BIa)
Use: Floors & Walls
Product Code: DFALS

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN 16165 Annex B	R9 from 3° to 10° R10 from 10° to 19° R11 from 19° to 27°	Matt Silk Canette, Matt & Matt Leather Grip
Areas with bare feet	BS EN 16165 Annex A	B over 18° to 24° C over 24°	Matt, Matt Leather Grip
Slip resistance (Pendulum) Coefficient of friction	BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0.08% (Average value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm^2	50 N/mm^2 (Average value)
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm ≥ 1300 N	2200 N (Average value)
Resistance to deep abrasion (unglazed tiles)	BS EN ISO 10545-6	≤ 175 mm^3	140 mm^3 (Average value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	ULA – Cannete, Matt, Matt Leather, & Grip ULB – Matt Silk
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	UHA – Cannete, Matt, Matt Leather & Grip UHB – Matt Silk
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	UA
Stain resistance	BS EN ISO 10545-14	Declared value - unglazed	Class 4
Reaction to fire	Based on the decision 96/603/EC and its changes	$A1_{FL}$/A1	$A1_{FL}$/A1
Recycled content			24.2%

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale.

December 2025

DOMUS
service@domusgroup.com | t: 020 8481 9500 | domusgroup.com