

# Verso 20mm

*External 20mm / Porcelain Stone*



Floor: DXF LVE 05 Cross Cut Bush Hammered Anti-Slip

## 4 Colours / 1 Finish / 2 Sizes

Verso 20mm is inspired by travertine, a sedimentary rock formed from sediments settled in thermal waters and waterfalls. This porcelain tile range consists of Vein Cut, in which you can see the layers of sediment—and Cross Cut, which shows the cross-section of the veins of the sediment layers cut along the grain.



Floor: DXF LVE 04 Cross Cut Bush Hammered Anti-Slip



# Sizes



DXF LVE 01 Vein Cut




DXF LVE 04 Cross Cut



DXF LVE 02 Vein Cut



DXF LVE 05 Cross Cut

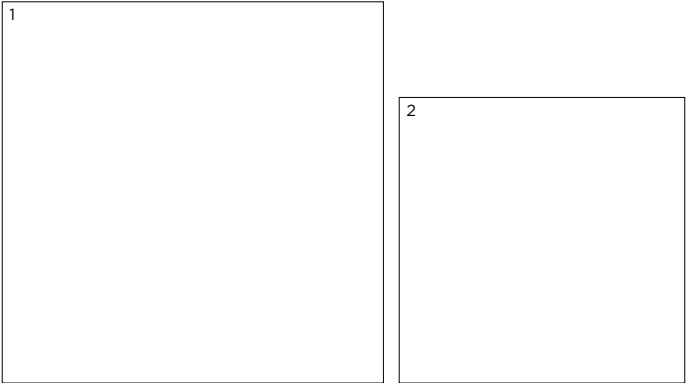

	Size (mm)	Thickness	Finish	Colour Availability
1	1198 x 1198 (R)	20	Bush Hammered Anti-Slip	All colours
2	898 x 898 (R)	20	Bush Hammered Anti-Slip	All colours

(R) Rectified size – square edge with bevel. Recommended for outdoor use only. Swatch colours may vary from original. Samples should be requested.

# Verso 20mm

## Technical Data

**Product Type:** Glazed Porcelain (BS EN 14411 – Group Bla)

**Use:** Floors & Walls

**Product Code:** DXFLVE

## DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms

## SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R11 from 19° to 27°	Bush Hammered Anti Slip
Areas with bare feet	DIN 51097	C over 24°	Bush Hammered Anti Slip
Slip resistance (Pendulum) Coefficient of friction	BS EN 16165	Test results upon request	

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale.  
February 2025

## PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	< 0.5% (Typical Value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm²	50 N/mm² (Typical Value)
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm ≥ 1300 N	> 9200 N (Typical Value)
Resistance to surface abrasion (glazed tiles)	BS EN ISO 10545-7	PEI *see classifications below	Class 4
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3 – glazed	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 <sub>FL</sub> /A1	A1 <sub>FL</sub> /A1
Recycled content			30%

**\*PEI classifications**  
PEI 1 – Very light traffic  
PEI 2 – Light traffic  
PEI 3 – Light to moderate traffic  
PEI 4 – Moderate to heavy traffic  
PEI 5 – Heavy to extra heavy traffic



DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com