


Nuance

Ceramic Colours

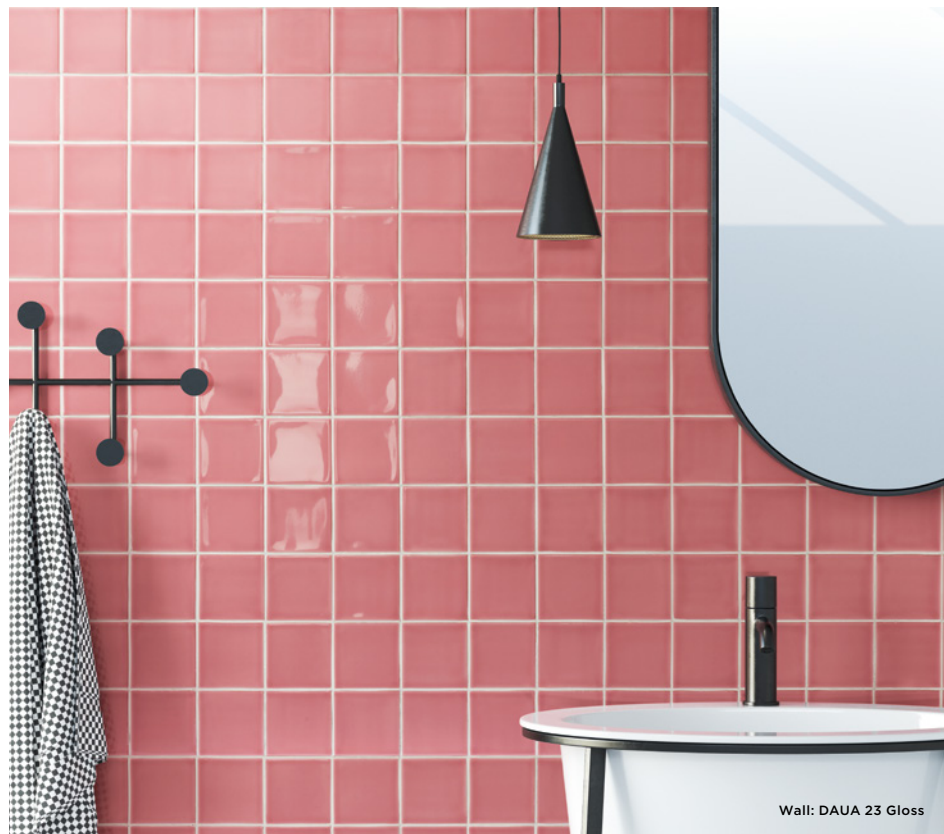


48 Colours / **1** Finish / **3** Sizes

Nuance embodies the essence of a luxury handcrafted product, showcasing a delicate, artisanal aesthetic. Featuring soft and subtle movements, each tile is finished with a special glaze that provides appealing visual depth. This range offers a unique solution for decorating spaces with elevated sophistication and refinement.







Sizes

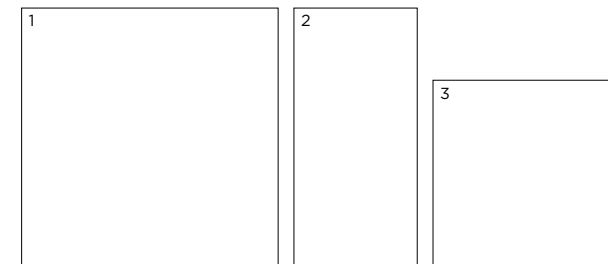

	Size (mm)	Thickness	Finish	Colour Availability
1	139 x 139 (N)	9	Gloss	All colours
2	139 x 67 (N)	9	Gloss	All colours
3	100 x 100 (N)	9	Gloss	All colours


Swatch colours may vary from original. Samples should be requested. Recommended for use on internal walls only. Colours DAUA 11, 29 & 30 have a crackled effect as an inherent characteristic and, therefore, require sealant.



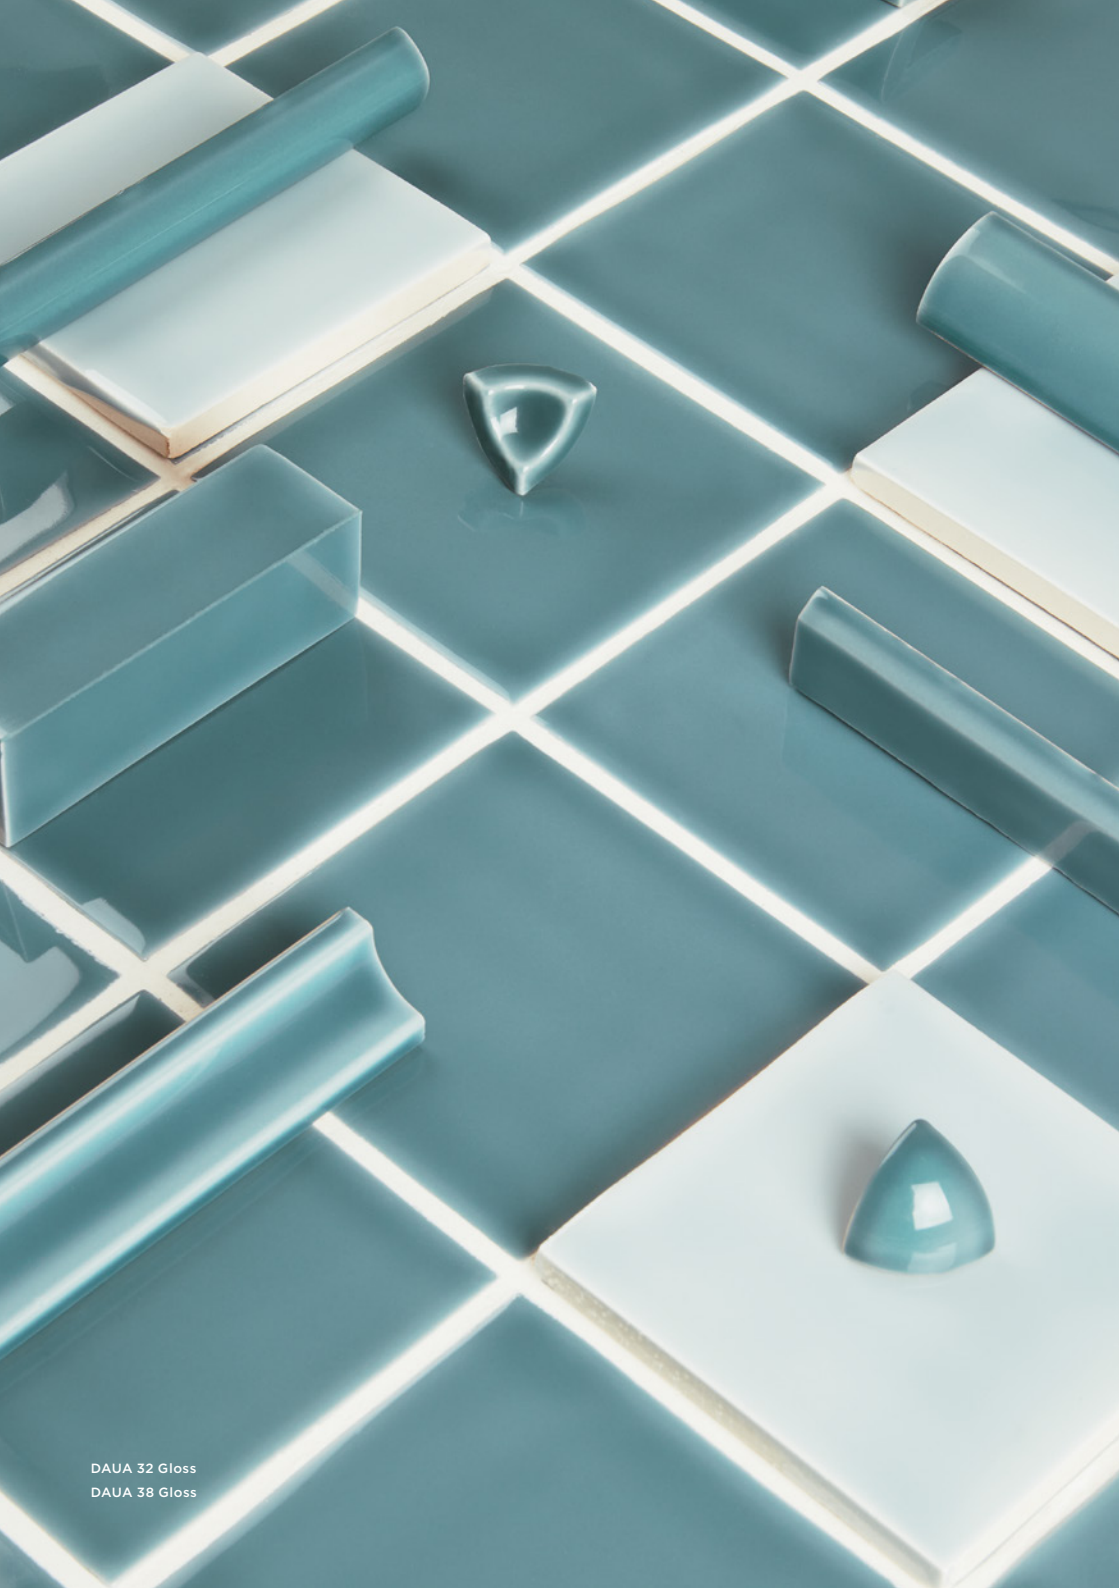


DAUA 32 Gloss
DAUA 38 Gloss

Special Pieces

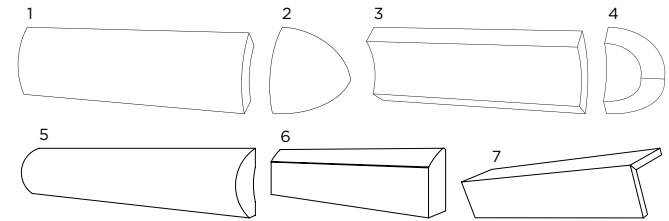

	Size (mm)	Thickness	Finish	Colour Availability
1	Convex Quarter Round 140 x 30	9	Gloss	All colours
	100 x 30	9	Gloss	All colours
2	Convex Quarter Round Corner 30 x 30	9	Gloss	All colours
3	Concave Quarter Round 140 x 30	9	Gloss	All colours
	100 x 30	9	Gloss	All colours
4	Concave Quarter Round Corner 30 x 30	9	Gloss	All colours
5	Semi-Round Bullnose 140 x 20	9	Gloss	All colours
	100 x 20	9	Gloss	All colours
6	Surface Bullnose 140 x 25	9	Gloss	All colours
	100 x 25	9	Gloss	All colours
7	Profile 140 x 20	9	Gloss	All colours
	100 x 20	9	Gloss	All colours

Swatch colours may vary from original. Samples should be requested.



DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Nuance

Technical Data

Product Type: Glazed Ceramic (BS EN 14411 – Group BIII)

Use: Walls (Internal only)

Product Code: DAUA

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement (for nominal size <i>N</i>)		Actual Value
		70mm ≤ <i>N</i> < 150mm	<i>N</i> ≥ 150mm	
Length & width	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 0.5mm	± 10% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.5mm	± 0.30% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness): Centre curvature	BS EN ISO 10545-2	+ 0.75mm - 0.5mm	+ 0.5% (max. + 2.0mm) - 0.3% (max. - 1.5mm)	Conforms
Edge curvature	BS EN ISO 10545-2	+ 0.75mm - 0.5mm	+ 0.5% (max. + 2.0mm) - 0.3% (max. - 1.5mm)	Conforms
Warpage	BS EN ISO 10545-2	± 0.75mm	± 0.5% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%		Conforms

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	> 10%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 7.5mm thick ≥ 12 N/mm ²	Conforms
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm thick ≥ 600 N	Conforms
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1	A1
Recycled content			15%

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. February 2026



DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com