Cromie 15mm

Technical Stone

Wall: DRSC 03 Compact

20 Colours / **2** Finishes / **11** Sizes / **1** Mosaic

Cromie 15mm is a colourful eco-friendly interior tile range comprised of natural recycled materials. The by-products from Italy's quarries are 'cold-pressed' into tiles, producing a uniquely textured, low-embodied energy material. View Cromie 22mm for unsealed tiles suitable for internal and external use.

Wall: DRSC 07 Compact

Compact Finish

DRSC 07

DRSC 04

DRSC 05

DRSC 06

DRSC 09

DRSC 10

DRSC 11

DRSC 12


DRSC 19


DRSC 17


DRSC 18

DRSC 20

DRSC 13


DRSC 15

DRSC 14


DRSC 16

DRSC 01


DRSC 02

DRSC 08

DRSC 03

Sizes

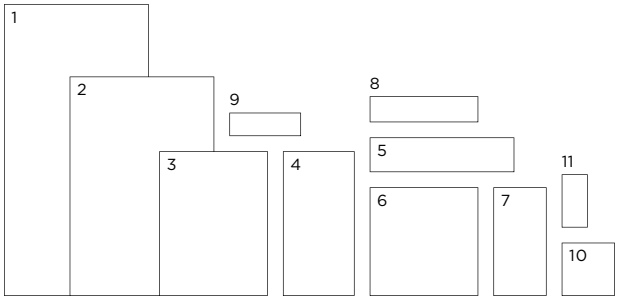

	Size (mm)	Thickness	Finish	Colour Availability
1	672 x 333 (N)	15	Compact	All colours
2	505 x 333 (N)	15	Compact	All colours
			Consolare	All colours
3	333 x 250 (N)	15	Compact	All colours
			Consolare	All colours
4	333 x 165 (N)	15	Compact	All colours
			Consolare	All colours
5	333 x 80 (N)	15	Compact	All colours
			Consolare	All colours
6	250 x 250 (N)	15	Compact	All colours
			Consolare	All colours
7	250 x 122.5 (N)	15	Compact	All colours
			Consolare	All colours
8	250 x 60 (N)	15	Compact	All colours
			Consolare	All colours
9	165 x 54 (N)	15	Compact	All colours
			Consolare	All colours
10	122.5 x 122.5 (N)	15	Compact	All colours
			Consolare	All colours
11	122.5 x 60 (N)	15	Compact	All colours
			Consolare	All colours

(N) Nominal size – pressed edge. Swatch colours may vary from original. Samples should be requested.

V2 – Moderate Shade Variation

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Consolare Finish

DRSC 07

DRSC 04

DRSC 05

DRSC 06

DRSC 09

DRSC 10


DRSC 11


DRSC 12


DRSC 19


DRSC 17


DRSC 18


DRSC 20

DRSC 13


DRSC 15

DRSC 14


DRSC 16

DRSC 01

DRSC 02


DRSC 08


DRSC 03

Mosaics & Special Pieces

1

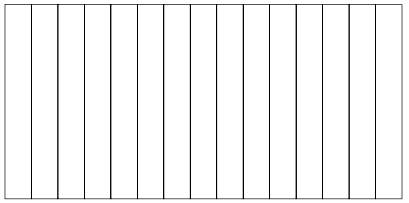

	Size (mm)	Thickness	Finish	Colour Availability
1	Gessetti Mosaic 122.5 x 14 (N) on 250 x 122.5 sheet	15	Compact Consolare	All colours All colours
	Step Tread Toro 333 x 250	30	Compact Consolare	All colours All colours
	Step Tread Becco 333 x 250	22	Compact Consolare	All colours All colours
	Skirting 250 x 122.5	15	Compact Consolare	All colours All colours

(N) Nominal size – pressed edge. Swatch colours may vary from original. Samples should be requested.

V2 – Moderate
Shade Variation

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Zdora XL
Cromie 15mm DRSC 01 Compact, DRSC 06 Compact & DRSC 12 Compact
Pigmento 15mm DSRG 01 Compact

Custom Designs

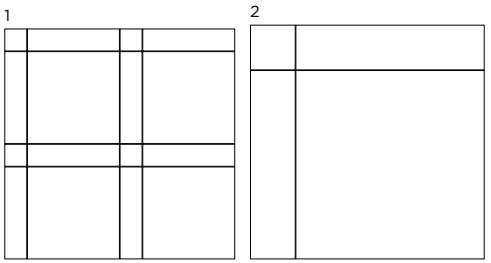

	Size (mm)	Thickness	Finish	Colour Availability
1	Zdora 122.5 x 122.5 (N) 122.5 x 30 (N) 30 x 30 (N) on 309 x 309 sheet	15	Compact	All colours
2	Zdora XL 250 x 250 (N) 250 x 60 (N) 60 x 60 (N) on 311 x 311 sheet	15	Compact	All colours

(N) Nominal size – pressed edge. Swatch colours may vary from original. Samples should be requested. Suitable for indoor use only. Zdora and Zdora XL custom designs can be produced upon request using any colours of Cromie 15mm and Pigmento 15mm.

V2 – Moderate
Shade Variation

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Cromie 15mm

Technical Data

Product Type: Reconstituted Stone*
Use: Internal Floors & Walls
Product Code: DRSC
Finishes: Compact – smooth surface, even edges
Consolare – aged surface, aged edges

DIMENSION & SURFACE QUALITY

THIS IS AN ARTISANAL, HANDMADE / HAND-FINISHED PRODUCT
IRREGULAR EDGES, VARIATION IN TONE, THICKNESS, SIZE / PLANARITY (FLATNESS) ARE CHARACTERISTICS OF THIS MATERIAL
DIMENSIONS CAN VARY BY ±1 mm FROM THE NOMINAL SIZE.

*** This material requires sealing pre and post grouting (refer to Fixing Recommendations document)**

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	EN 16165 (Annexure B)	R11 from 19° to 27°	Compact & Consolare
Areas with bare feet	EN 16165 (Annexure A)	C over 24°	Compact & Consolare
Slip resistance Coefficient of friction	BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Unit of Measure	Actual Value
Impact Strength	RD n 2234	Kg/cm^2	0.34 (Typical Value)
Resistance to abrasion	EN 202	mm^2	705 (Typical Value)
Flexural strength	UN EN 100	Kg/cm^2	Side 12.5 = 119 kg/cm^2 Side 25 = 88 kg/cm^2
Impact Resistance	EN 14617-9 : 2005	Breaking Energy (J)	2.94 (Typical Value)
Resistance to frost	UNI EN 202	Declared Value	Resistant
Compressive strength	UNI EN 202	Kg/m^2	744 - 1282
Chemical Resistance	EN 14617-10 : 2012		C4
Resistance to salt			Resistant
Reaction to fire	Based on the decision 96/603/EC and its changes		$A1_{FL}/A1$
Recycled content			60%

RECYCLED CONTENT

EPD®

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale.

April 2026

DOMUS
service@domusgroup.com | t: 020 8481 9500 | domusgroup.com