

# Stone Life Magnum

*Lightweight Slabs / Porcelain Stone*



Wall: DMAG 269 Cubes Décor Matt

4 Colours / 1 Finish / 4 Sizes / 2 Mosaics / 1 Décor

Loosely inspired by Burgundy limestone, Stone Life Magnum's versatile surface forms the perfect backdrop for settings with a free, contemporary flavour. This lightweight porcelain slab range is part of Florim's 'CarbonZero' selection of Climate-Positive surfaces, which reduce the amount of CO<sub>2</sub> in the atmosphere.



Wall: DMAG 266 Cubes Décor Matt  
Floor: DMAG 269 Matt



# Sizes



DMAG 266




DMAG 267



DMAG 268




DMAG 269

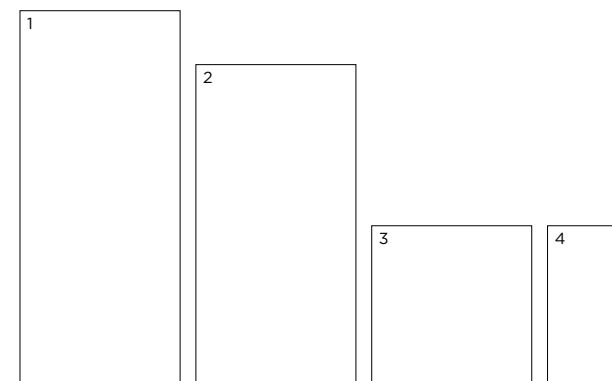


|   | Size (mm)       | Thickness | Finish | Colour Availability |
|---|-----------------|-----------|--------|---------------------|
| 1 | 2797 x 1197 (R) | 6         | Matt   | All colours         |
| 2 | 2397 x 1197 (R) | 6         | Matt   | All colours         |
| 3 | 1197 x 1197 (R) | 6         | Matt   | All colours         |
| 4 | 1197 x 597 (R)  | 6         | Matt   | All colours         |

(R) Rectified size - square edge with bevel. Mosaics, décors and special pieces shown on next page. Swatch colours may vary from original. Samples should be requested.


# Mosaics & Décors

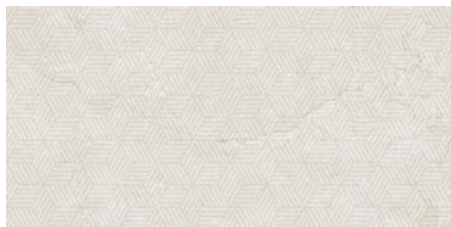


DMAG 266 Cubes Décor

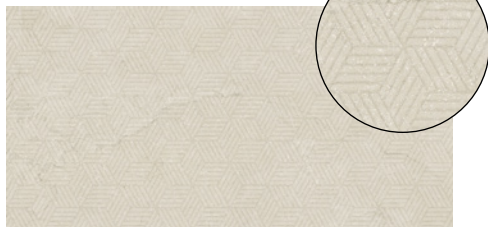

DMAG 267 Cubes Décor

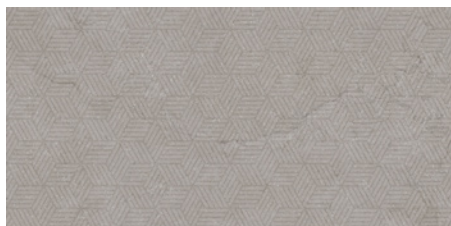


DMAG 268 Cubes Décor

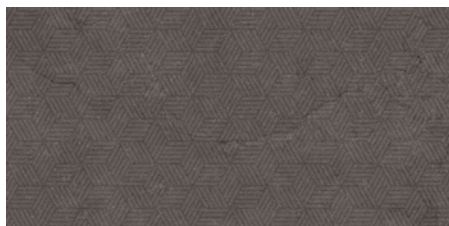


DMAG 269 Cubes Décor


## Sketch Mosaic




DMAG 266



DMAG 267



DMAG 268



DMAG 269

## Blocks Mosaic




DMAG 266




DMAG 267



DMAG 268



DMAG 269

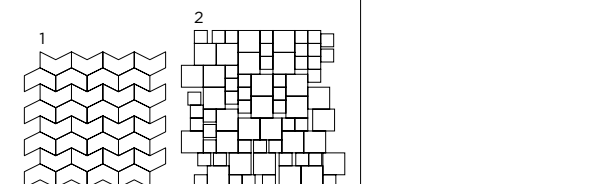

|   | Size (mm)                           | Thickness | Finish | Colour Availability |
|---|-------------------------------------|-----------|--------|---------------------|
| 1 | Sketch Mosaic<br>on 320 x 300 sheet | 6         | Matt   | All colours         |
| 2 | Blocks Mosaic<br>on 370 x 335 sheet | 6         | Matt   | All colours         |
| 3 | Cubes Décor<br>1197 x 597 (R)       | 6         | Matt   | All colours         |

(R) Rectified size – square edge with bevel. Swatch colours may vary from original. Samples should be requested.

V3 - High  
Shade Variation

**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com



## V3 - High Shade Variation


---



DMAG 266



DMAG 267

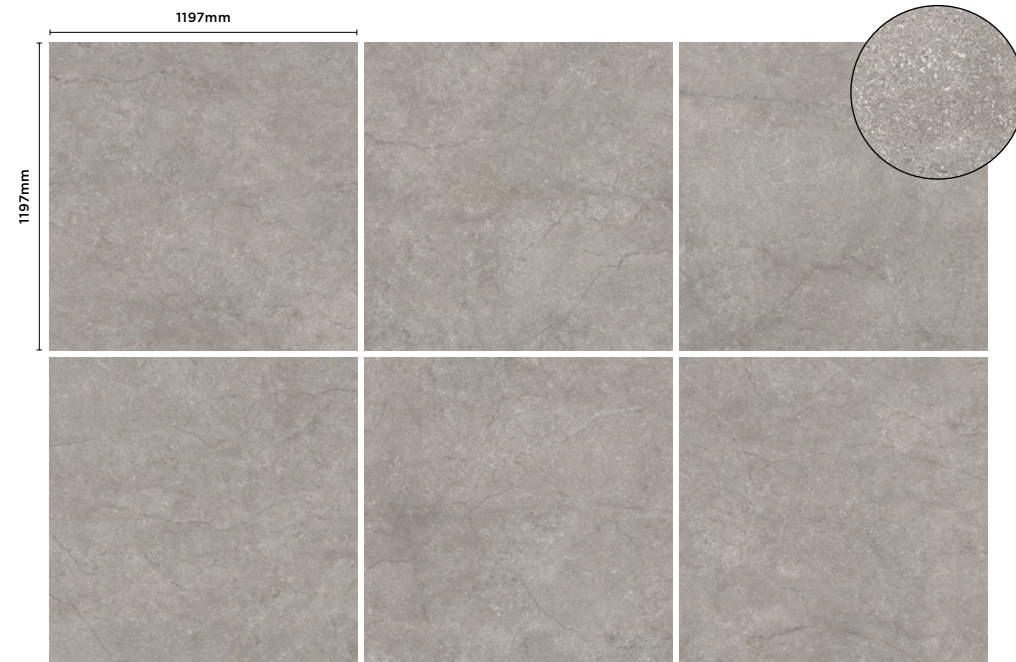

DMAG 268



DMAG 269

# Stone Life Magnum

Technical Data

Product Type: Glazed Porcelain (BS EN 14411 – Group BIa)

Use: Floors & Walls

Product Code: DMAG

DIMENSION & SURFACE QUALITY

| Technical Characteristics  | Industry Standards | Requirement            | Actual Value |
|----------------------------|--------------------|------------------------|--------------|
| Length & width             | BS EN ISO 10545-2  | ± 0.60% (max. ± 2.0mm) | Conforms     |
| Thickness                  | BS EN ISO 10545-2  | ± 5% (max. ± 0.5mm)    | Conforms     |
| Edge straightness          | BS EN ISO 10545-2  | ± 0.50% (max. ± 1.5mm) | Conforms     |
| Orthogonality (squareness) | BS EN ISO 10545-2  | ± 0.50% (max. ± 2.0mm) | Conforms     |
| Planarity (flatness)       | BS EN ISO 10545-2  | ± 0.50% (max. ± 2.0mm) | Conforms     |
| Appearance                 | BS EN ISO 10545-2  | > 95%                  | Conforms     |

SLIP RESISTANCE

| Technical Characteristics                             | Industry Standards  | Requirement               | Finish |
|-------------------------------------------------------|---------------------|---------------------------|--------|
| Areas with footwear                                   | BS EN 16165 Annex B | R10 from 10° to 19°       | Matt   |
| Slip resistance (Pendulum)<br>Coefficient of friction | BS EN 16165         | Test results upon request |        |

PRODUCT QUALITY & DURABILITY

| Technical Characteristics                                     | Industry Standards                                    | Requirement                       | Actual Value                                        |
|---------------------------------------------------------------|-------------------------------------------------------|-----------------------------------|-----------------------------------------------------|
| Water absorption                                              | BS EN ISO 10545-3                                     | ≤ 0.5%                            | 0.08% (Average Value)                               |
| Modulus of rupture (bending strength)                         | BS EN ISO 10545-4                                     | ≥ 35 N/mm²                        | 52 N/mm² (Average Value)                            |
| Breaking strength                                             | BS EN ISO 10545-4                                     | < 7.5mm ≥ 700 N                   | 1350 N (Average Value)                              |
| Resistance to surface abrasion (glazed tiles)                 | BS EN ISO 10545-7                                     | PEI<br>*see classifications below | Class 2 – DMAG 269<br>Class 4 – DMAG 266, 267 & 268 |
| Thermal shock resistance                                      | BS EN ISO 10545-9                                     | No visible defects                | Resistant                                           |
| Crazing resistance                                            | BS EN ISO 10545-11                                    | No visible signs                  | Resistant                                           |
| Frost resistance                                              | BS EN ISO 10545-12                                    | No surface alteration             | Resistant                                           |
| Chemical resistance:<br>Low concentrations of acids & alkalis | BS EN ISO 10545-13                                    | No visible defects                | GLA                                                 |
| Domestic chemicals & additives<br>for swimming pools          | BS EN ISO 10545-13                                    | UB/GB min.                        | GA                                                  |
| Stain resistance                                              | BS EN ISO 10545-14                                    | Min. Class 3 – glazed             | Class 4                                             |
| Reaction to fire                                              | Based on the decision<br>96/603/EC<br>and its changes | A1 <sub>FL</sub> /A1              | A1 <sub>FL</sub> /A1                                |
| Recycled content                                              |                                                       |                                   | 5.8% - DMAG 266 & 267<br>11% - DMAG 268 & 269       |

**\*PEI classifications**  
PEI 1 - Very light traffic  
PEI 2 - Light traffic  
PEI 3 - Light to moderate traffic  
PEI 4 - Moderate to heavy traffic  
PEI 5 - Heavy to extra heavy traffic



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale.  
April 2025