Provoak

Porcelain Wood

Floor: DPVK 03 Sestino Natural

2 Colours / **2** Finishes / **3** Sizes / **2** Mosaics

Provoak embodies the aesthetics of natural wood to create surfaces with a sleek finish and a rustic undertone. This wood-effect porcelain tile range can help create tight and technical patterns easily for an overall seamless design scheme.

Floor: DPVK 02 Chevron Mosaic Mono & DPVK 02 Natural

Floor: DPVK 03 Chevron Mosaic Mono Natural

Floor: DPVK 02 Natural

DPVK 02 Natural

DPVK 02 Anti-Slip

DPVK 03 Natural

DPVK 03 Anti-Slip

Sizes

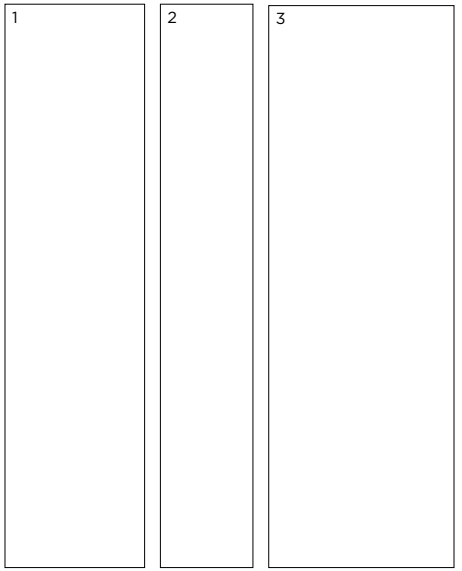

	Size (mm)	Thickness	Finish	Colour Availability
1	1198 x 298 (R)	9.5	Natural	All colours
2	1198 x 198 (R)	9.5	Natural	All colours
			Anti-Slip	All colours
3	1195 x 395 (R)	20	Natural	DPVK 03

(R) Rectified size – square edge with bevel. Mosaics shown on next page.
Swatch colours may vary from original. Samples should be requested.

V4 – Random Shade Variation

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Mosaics

Chevron Mosaic Mono

DPVK 02

DPVK 03

Sestino Mosaic

DPVK 02

DPVK 03

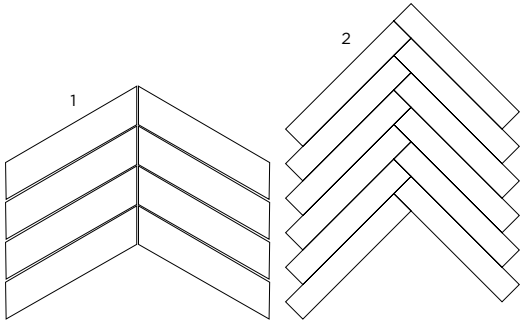

	Size (mm)	Thickness	Finish	Colour Availability
1	Chevron Mosaic Mono on 340 x 294 sheet	9.5	Natural	All colours
2	Sestino Mosaic on 300 x 300 sheet	9.5	Natural	All colours

Swatch colours may vary from original. Samples should be requested. Special pieces shown on next page.

V4 – Random Shade Variation

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Floor: DPVK 03 Natural

Special Pieces

	Size (mm)	Thickness	Finish	Colour Availability
1	Skirting 1200 x 46	9.5	Natural	All colours
2	Step Tread 1200 x 330	9.5	Natural	All colours
3	Bullnose Step Tread 1200 x 330 x 32 x 32	9.5	Natural	All colours
4	Bullnose Step Tread 1200 x 330 x 50	20	Natural	DPVK 03
5	Angle Step Tread 1200 x 330 x 32 x 32	9.5	Natural	All colours
6	Angle Step Tread 1200 x 330 x 50	20	Natural	DPVK 03
7	Stair Tread 1200 x 330	20	Natural	DPVK 03
8	Stair Riser 1200 x 165	20	Natural	DPVK 03
9	Terminal 1200 x 330 x 25	20	Natural	DPVK 03

Swatch colours may vary from original. Samples should be requested.

V4 – Random
Shade Variation

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Provoak

Technical Data

Product Type: Glazed Porcelain (BS EN 14411 – Group BIa)

Use: Floors & Walls

Product Code: DPVK

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement (for nominal size *N*)		Actual Value
		70mm ≤N<150mm	*N* ≥ 150mm	
Length & width	BS EN ISO 10545-2	± 0.9mm	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 0.5mm	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2		> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R10 from 10° to 19° R11 from 19° to 27°	Natural 10mm Anti-Slip & Natural 20mm
Areas with bare feet	DIN 51097	B over 18° to 24° C over 24°	Natural 10mm Anti-Slip & Natural 20mm
Slip resistance Coefficient of friction	BS 7976-2 BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm^2	≥ 45 N/mm^2 (Typical value)
Breaking strength	BS EN ISO 10545-4	≥ 1300 N	≥ 2000 N (Typical value) – 10mm ≥ 12000 N (Typical value) – 20mm
Resistance to surface abrasion (glazed tiles)	BS EN ISO 10545-7	PEI *see classifications below	Class 4 - colour DPVK 05 Class 5 – colours DPVK 01 to 04
Linear thermal expansion coefficient	BS EN ISO 10545-8	Declared value	≤ 9 x 10^{-6}/ ^{0} C (Typical value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Class 5
Colour resistance to light exposure	DIN 51094	No noticeable colour alteration	Resistant
Reaction to fire	Based on the decision 96/603/EC and its changes	$A1_{FL}$/A1	$A1_{FL}$/A1
Recycled content			13% - 10mm 25% - 20mm

*PEI classifications
PEI 1 – Very light traffic
PEI 2 - Light traffic
PEI 3 - Light to moderate traffic
PEI 4 - Moderate to heavy traffic
PEI 5 - Heavy to extra heavy traffic

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale.

February 2023

DOMUS
service@domusgroup.com | t: 020 8481 9500 | domusgroup.com