

Time

Porcelain Design



Floor: DTIM 07 Rough & DTIM 07 Smooth


8 Colours / 2 Finishes / 3 Sizes


Time is a porcelain tile range that draws inspiration from aspects of geology and landscape. The two finishes, Smooth and Rough, were designed to complement each other and provide infinite layouts by alternating them with different sizes and colours.

Design Edward Barber & Jay Osgerby

Mutina

Wall & Floor: DTIM 01 Smooth & DTIM 04 Smooth

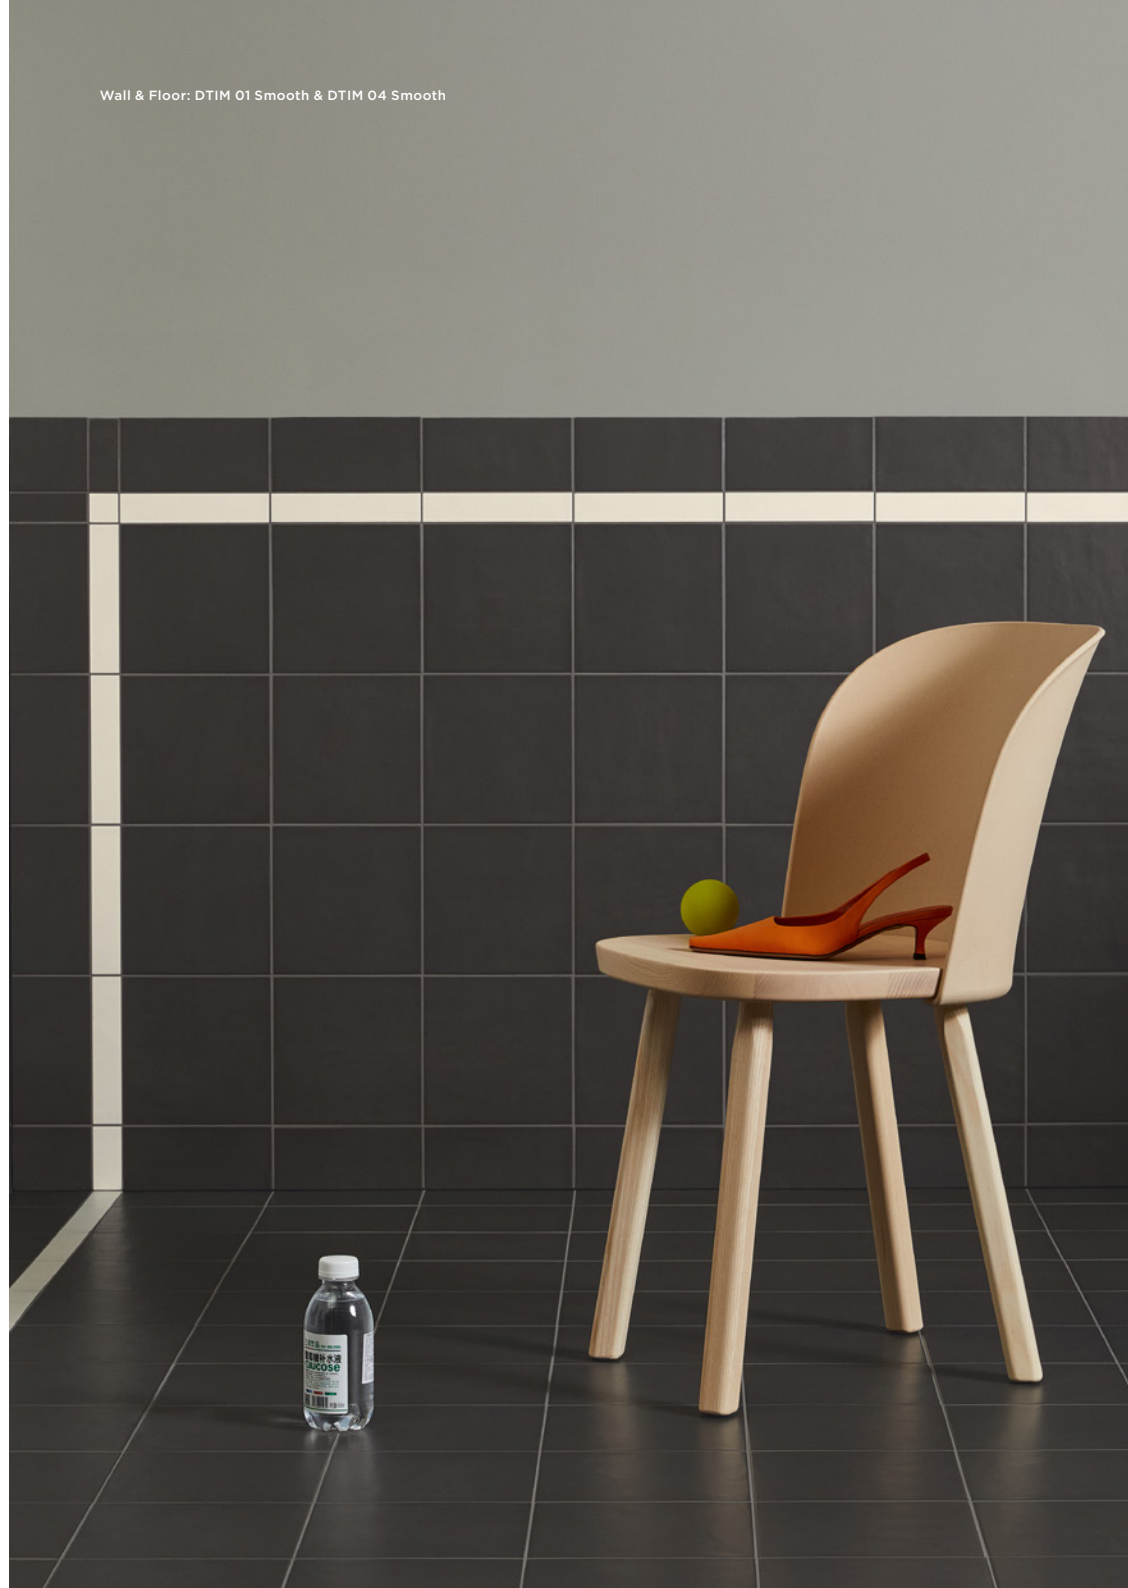

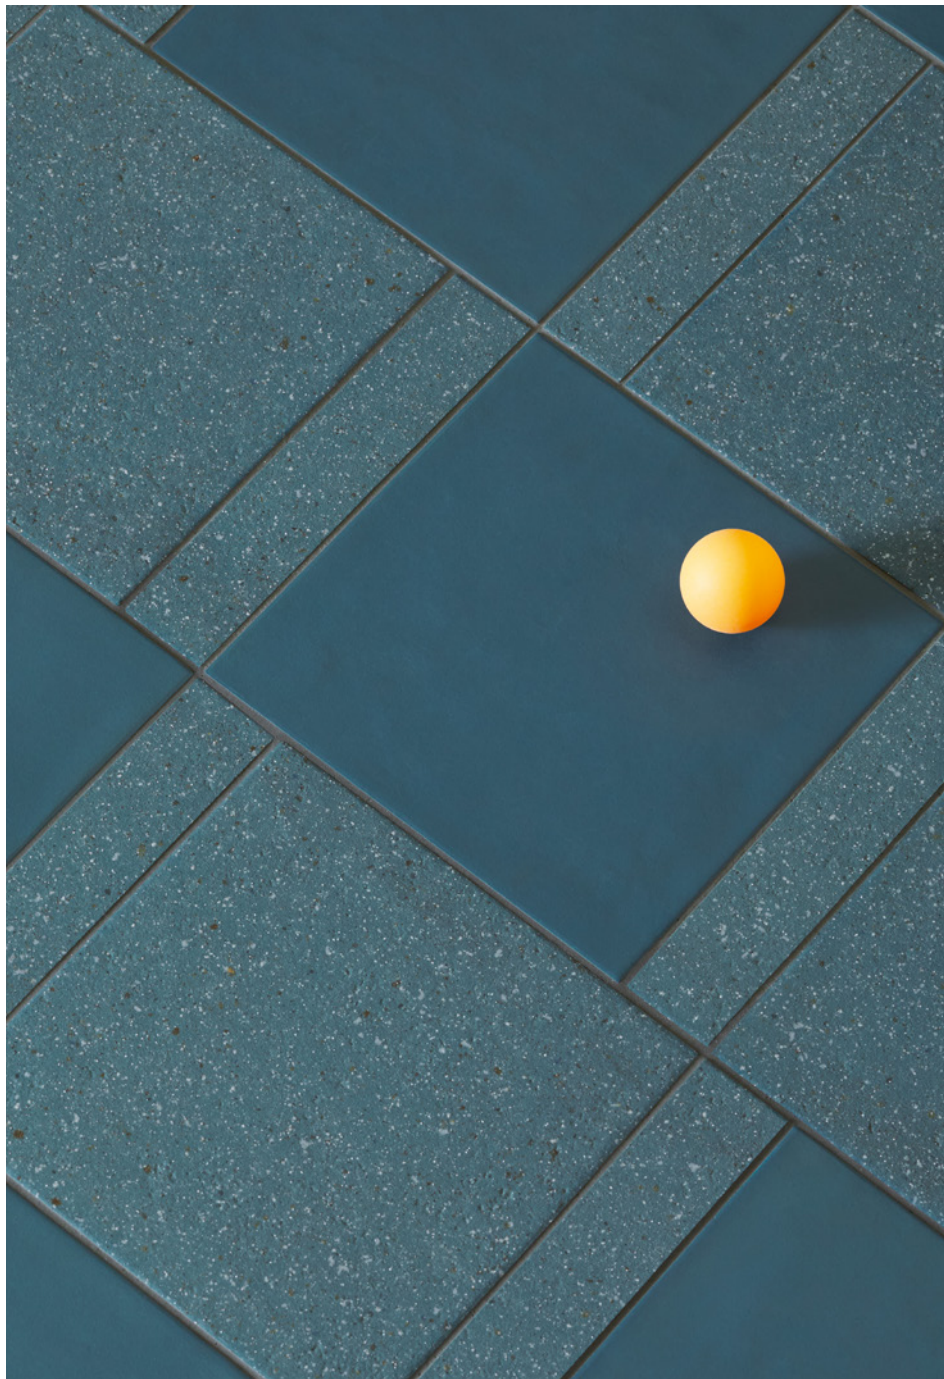


Floor: DTIM 08 Rough & DTIM 08 Smooth



Floor: DTIM 05 Rough & DTIM 05 Smooth

Sizes

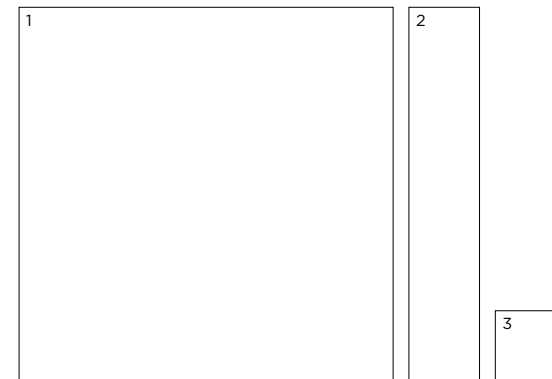

	Size (mm)	Thickness	Finish	Colour Availability
1	205 x 205 (N)	12	Smooth Rough	All colours All colours
2	205 x 39 (N)	12	Smooth Rough	All colours All colours
3	39 x 39 (N)	12	Smooth Rough	All colours All colours
	Skirting 205 x 39 (N)	12	Smooth Rough	All colours All colours

(N) Nominal size – pressed edge. Swatch colours may vary from original. Samples should be requested.

Time

Technical Data

Use: Floors & Walls

Product Code: DTIM

DIMENSION & SURFACE QUALITY

* Please be aware that this non-rectified tile is produced in two calibres, which vary slightly from the nominal size, details below.

205 x 205 mm - Calibre 0: 202.1 x 203.5 mm & Calibre 1: 203.6 x 205 mm
39 x 205 mm - Calibre 0: from 39 x 202.1 mm to 39 x 203.5 mm & Calibre 1: from 39 x 203.6 to 39 x 205 mm

Where there is a requirement for a specific calibre, please ensure this is quoted on all correspondence.
Where a specific calibre is not requested, a random calibre will be assigned to all orders.
Please ensure all tiles from the same calibre are used within the same project.

Technical Characteristics	Industry Standards	Requirement (for nominal size <i>N</i>)		Actual Value
		70mm ≤N<150mm	N ≥ 150mm	
Length & width	BS EN ISO 10545-2	± 0.9mm	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 0.5mm	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%		Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R10 from 10° to 19° R11 from 19° to 27°	Smooth Rough
Areas with bare feet	DIN 51097	B over 18° to 24° C over 24°	Smooth Rough
Slip resistance (Pendulum) Coefficient of friction	BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	Conforms
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm ≥ 1300 N	Conforms
Resistance to deep abrasion (unglazed tiles)	BS EN ISO 10545-6	≤ 175 mm ³	129 mm ³ (Typical value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	ULA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	UHA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	UA
Stain resistance	BS EN ISO 10545-14	Declared value - unglazed	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	A1 _{FL} /A1
Recycled content			20%

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. September 2024



DOMUS