

# Vivo

Porcelain Wood



Floor: DMVL 02 Matt

4 Colours / 2 Finishes / 4 Sizes

Vivo is a porcelain tile range with an elegant surface, characterised by knots and rifts with slight shading, giving the wood look a new dimension. 3D Ink technology adds a slightly shiny effect to the matt surface, ensuring a unique match of substance, colour, and texture on every piece.



Floor: DMVL 04 Grip



Floor: DMVL 01 Chevron Matt



Floor: DMVL 03 Matt



DMVL 01



DMVL 02



DMVL 03



DMVL 04



DMVL 01 Chevron



DMVL 02 Chevron




DMVL 03 Chevron



DMVL 04 Chevron

## Sizes

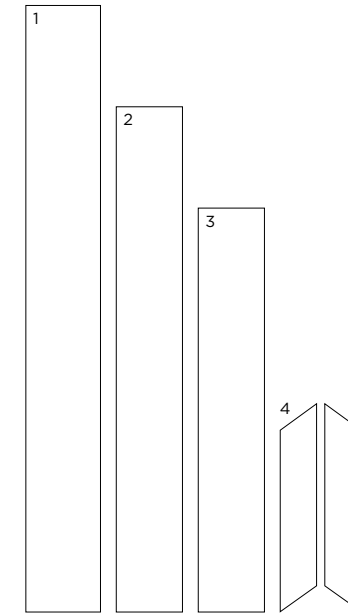

	Size (mm)	Thickness	Finish	Colour Availability
1	1798 x 223 (R)	9	Matt	All colours
2	1498 x 198 (R)	9	Matt Grip	All colours All colours
3	1198 x 198 (R)	9	Matt Grip	All colours All colours
4	Chevron 540 x 109.6 (R)	9	Matt	All colours

(R) Rectified size - square edge with bevel. Swatch colours may vary from original. Samples should be requested. The Chevron Left and Chevron Right pieces come equally mixed in a box and are not sold separately. Special pieces shown on next page.

V2 - Moderate  
Shade Variation

**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com




Floor: DMVL 01 Grip

## Special Pieces

---

	Size (mm)	Thickness	Finish	Colour Availability
1	Plinth Skirting 898 x 70	9	Matt	All colours
2	Plinth Skirting 748 x 70	9	Matt	All colours
3	Plinth Skirting 598 x 60	9	Matt	All colours
4	Bullnose Step Tread 1498 x 325	9	Matt	All colours
5	Bullnose Step Tread 1198 x 325	9	Matt	All colours

Swatch colours may vary from original. Samples should be requested.



V2 - Moderate  
Shade Variation

**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

# Vivo

## Technical Data

**Product Type:** Glazed Porcelain (BS EN 14411 – Group Bla)

**Use:** Floors & Walls

**Product Code:** DMVL

## DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement (for nominal size <i>N</i> )		Actual Value
		70mm ≤N<150mm	N ≥ 150mm	
Length & width	BS EN ISO 10545-2	± 0.9mm	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 0.5mm	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%		Conforms

## SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN 16165 (Annex B)	R9 from 3° to 10° R11 from 19° to 27°	Matt Grip
Areas with bare feet	BS EN 16165 (Annex A)	B over 18° to 24°	Grip
Slip resistance (Pendulum) Coefficient of friction	BS EN 16165 (Annex C)	Test results upon request	

## PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm <sup>2</sup>	Conforms
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm ≥ 1300 N	Conforms
Resistance to surface abrasion (glazed tiles)	* Internal method	—	Class G
Linear thermal expansion coefficient	BS EN ISO 10545-8	Declared value	≤ 9 x 10 <sup>-6</sup> / °C (Average value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA-GLB
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHA-GHB
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3 – glazed	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 <sub>FL</sub> /A1	A1 <sub>FL</sub> /A1
Recycled content			40%

\* Class G - Tiles suitable for rooms subject to medium-heavy abrasion, such as domestic houses and light-traffic commercial buildings



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. July 2025

**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com