

Terra Crea 20mm

External 20mm / Porcelain Terracotta




5 Colours / 1 Finish / 2 Sizes

Terra Crea 20mm creates spaces with a perfectly coordinated aesthetic, using the distinctive structures of the 2cm-thick tiles paired with the textural finish options for a completely tactile experience. Refer to Terra Crea for 10mm-thick tile and mosaic options with alternate finish choices.





Floor: DXF KTE 02 Ske Structured

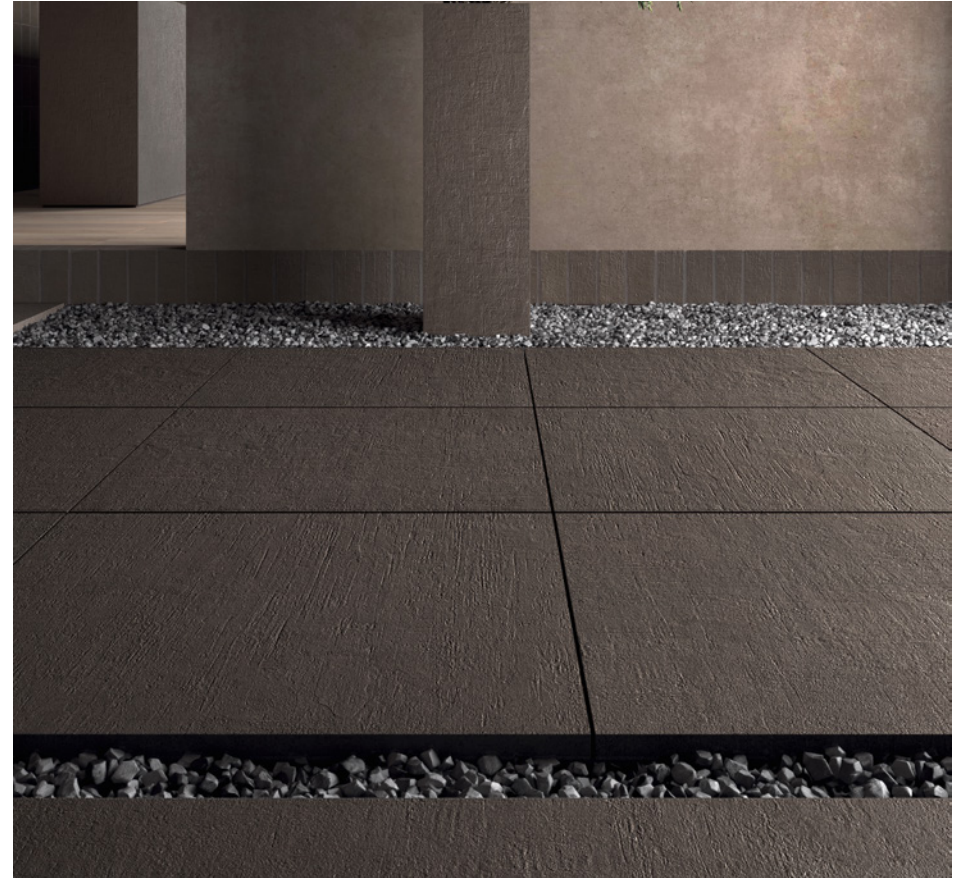

Floor: DXF KTE 03 Ske Structured



DXF KTE 01



DXF KTE 02



DXF KTE 03




DXF KTE 04



DXF KTE 05





Sizes

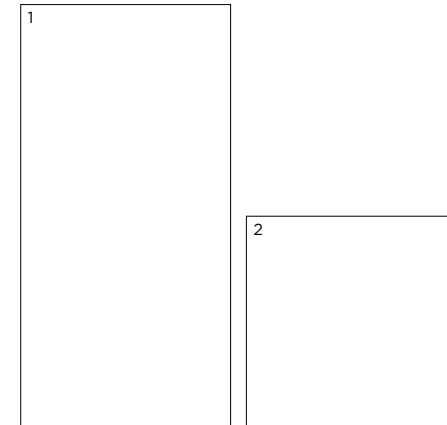

	Size (mm)	Thickness	Finish	Colour Availability
1	1197 x 597 (R)	20	Ske Structured	All colours
2	597 x 597 (R)	20	Ske Structured	All colours
	Maxi-Bevel Skirting 597 x 297 (R)	20	Ske Structured	All colours

(R) Rectified size – square edge with bevel. Swatch colours may vary from original. Samples should be requested.

V3 - High Shade Variation

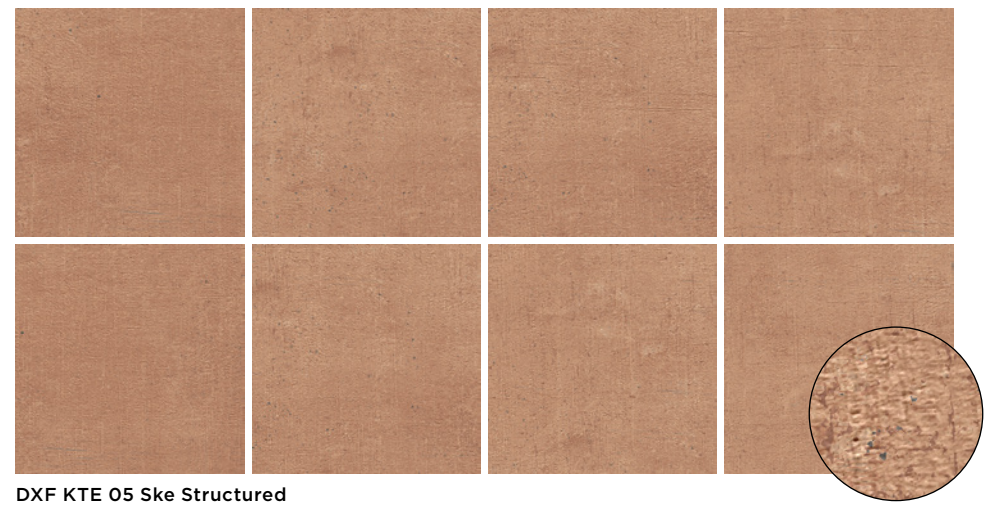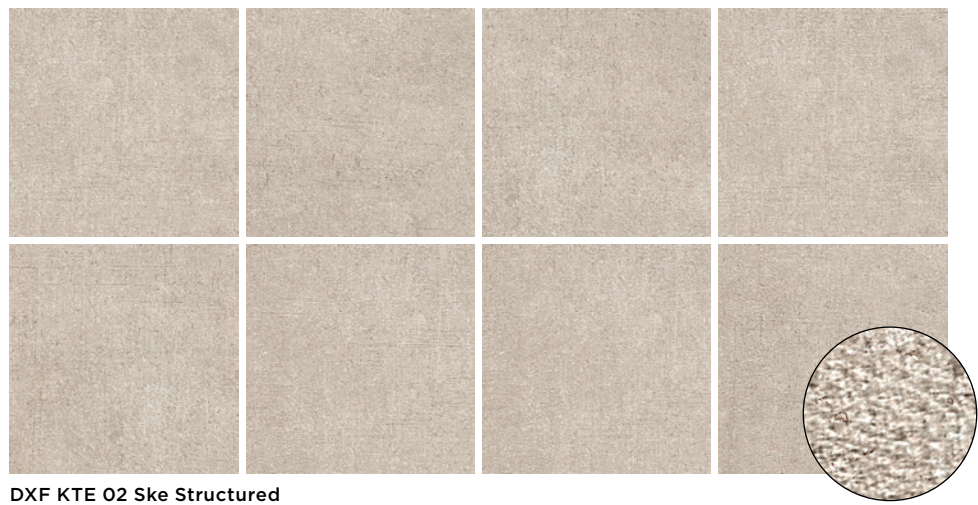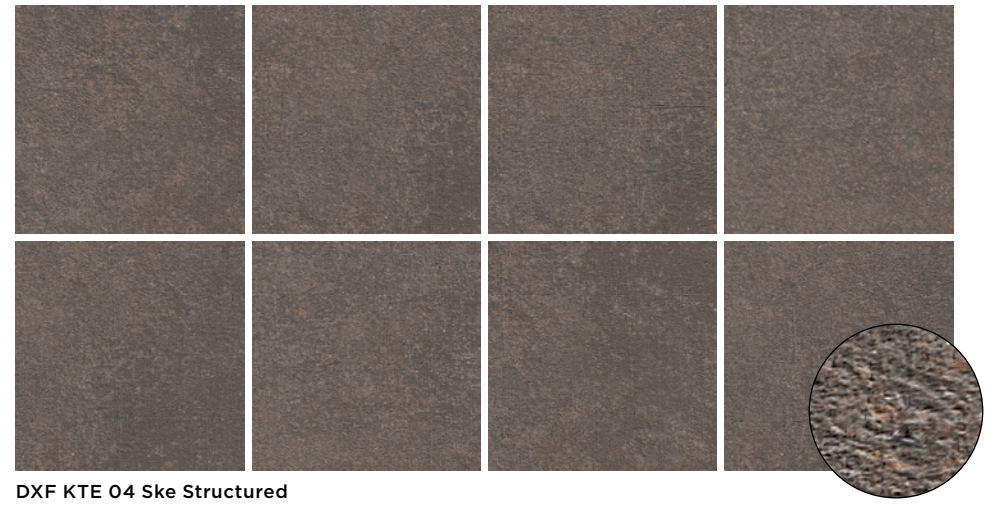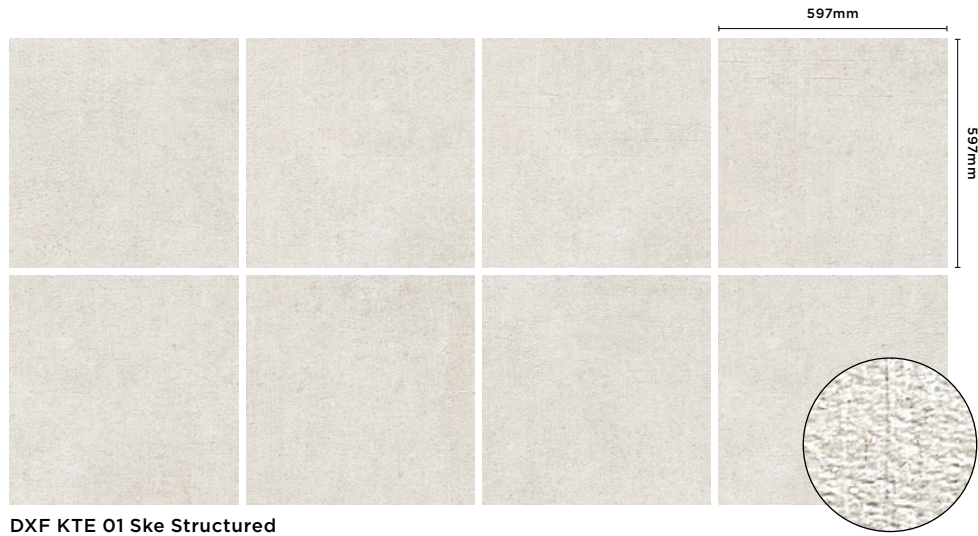

Terra Crea 20mm

Technical Data

Product Type: Unglazed Porcelain (BS EN 14411 – Group BIa)

Use: Floors

Product Code: DXF KTE

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R11 from 19° to 27°	Ske & Block Structured
Areas with bare feet	DIN 51097	C over 24°	Ske & Block Structured
Slip resistance Coefficient of friction	BS 7976-2 BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0.04% (Typical value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	53.7 N/mm ² (Typical value)
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm ≥ 1300 N	9 486 N (Typical value)
Resistance to deep abrasion (unglazed tiles)	BS EN ISO 10545-6	≤ 175 mm ³	< 132 mm ³ (Typical value)
Linear thermal expansion coefficient	BS EN ISO 10545-8	Declared value	7x10 ⁻⁶ /°C (Typical value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	ULA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	UHA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	UA
Stain resistance	BS EN ISO 10545-14	Min. Class 3 – glazed Declared value - unglazed	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	A1 _{FL} /A1
Recycled content			40%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. Dec. 2020

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com