

# Eme

*Porcelain Stone*



Floor: DLEN 01 Soft Textured

**3** Colours / **2** Finishes / **6** Sizes / **3** Mosaics

Inspired by the warmth and richness of coastal Mediterranean stones, Eme combines a detailed yet harmonious graphic range with a contemporary palette to generate a luxurious and calming aesthetic. Refer to Eme Slim for 6mm-thick lightweight slab options.



Floor: DLEN 02 Soft Textured




Wall: DLEN 03 Soft Textured




Floor: DLEN 02 Soft Textured



DLEN 01

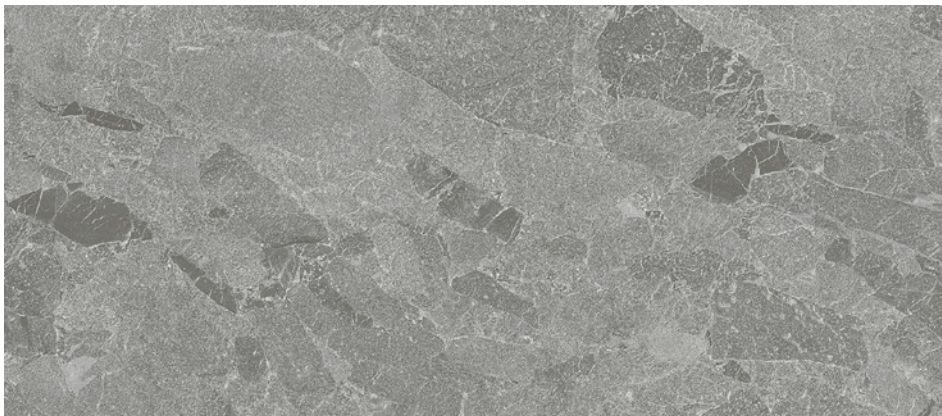


DLEN 02

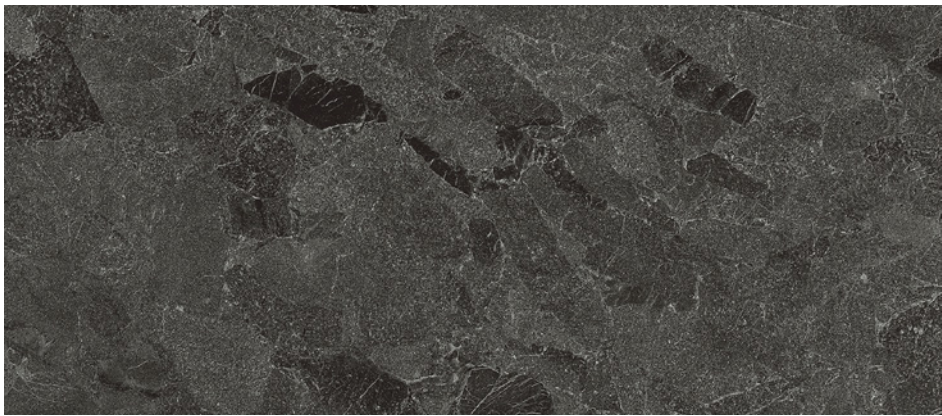

DLEN 03

# Sizes

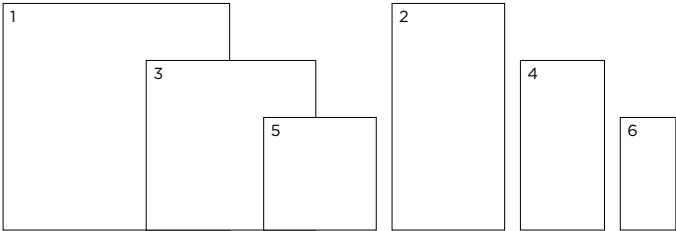


	Size (mm)	Thickness	Finish	Colour Availability
1	1198 x 1198 (R)	9	Soft Textured Natural Grip	All colours All colours
2	1198 x 598 (R)	9	Soft Textured Natural Grip	All colours All colours
3	898 x 898 (R)	9	Soft Textured Natural Grip	All colours All colours
4	898 x 448 (R)	9	Soft Textured Natural Grip	All colours All colours
5	598 x 598 (R)	9	Soft Textured Natural Grip	All colours All colours
6	598 x 298 (R)	9	Soft Textured Natural Grip	All colours All colours


(R) Rectified size – squared edge with bevel. Mosaics shown on next page.  
Swatch colours may vary from original. Samples should be requested.

# Mosaics


Mosaic 25 x 25mm



DLEN 01




DLEN 02



DLEN 03


Mosaic 48 x 48mm



DLEN 01



DLEN 02




DLEN 03


Muretto Mosaic




DLEN 01



DLEN 02




DLEN 03

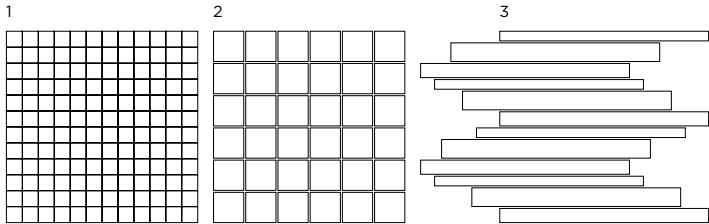

	Size (mm)	Thickness	Finish	Colour Availability
1	Mosaic 25 x 25 on 298 x 298 sheet	9	Soft Textured Natural Grip	All colours All colours
2	Mosaic 48 x 48 on 298 x 298 sheet	9	Soft Textured Natural Grip	All colours All colours
3	Muretto Mosaic on 298 x 298 sheet	9	Soft Textured Natural Grip	All colours All colours
	Skirting 1198 x 48 (R) 898 x 48 (R) 598 x 48 (R)	9	Soft Textured	All colours
	Step Tread 1198 x 333 x 30 (R) 898 x 333 x 30 (R) 598 x 333 x 30 (R)	9	All finishes	All colours
	Angle Step Tread 1198 x 333 x 30 (R) 898 x 333 x 30 (R) 598 x 333 x 30 (R)	9	All finishes	All colours

(R) Rectified size – squared edge with bevel. Step Treads and Angle Step Treads are available in both Soft Textured and Natural Grip finishes.  
Swatch colours may vary from original. Samples should be requested.


# Variations

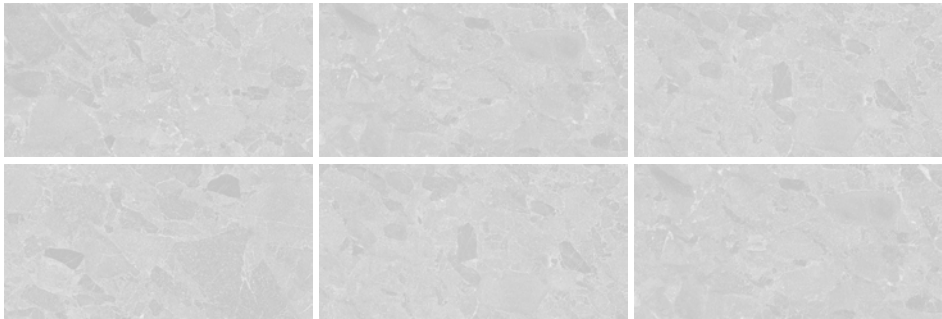

DLEN 01 Soft Textured




DLEN 01 Soft Textured

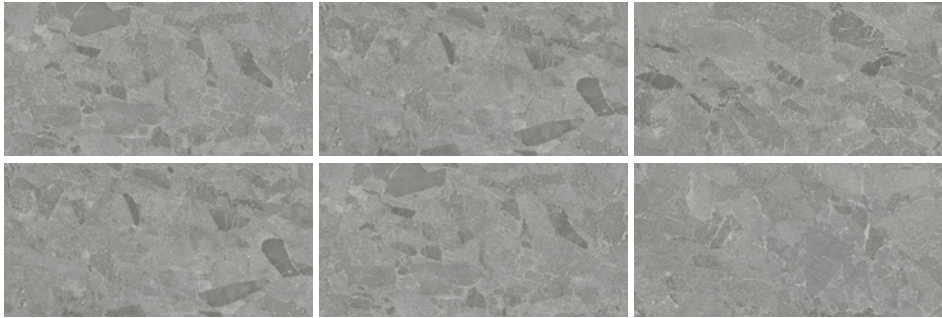


DLEN 02 Soft Textured



DLEN 02 Soft Textured

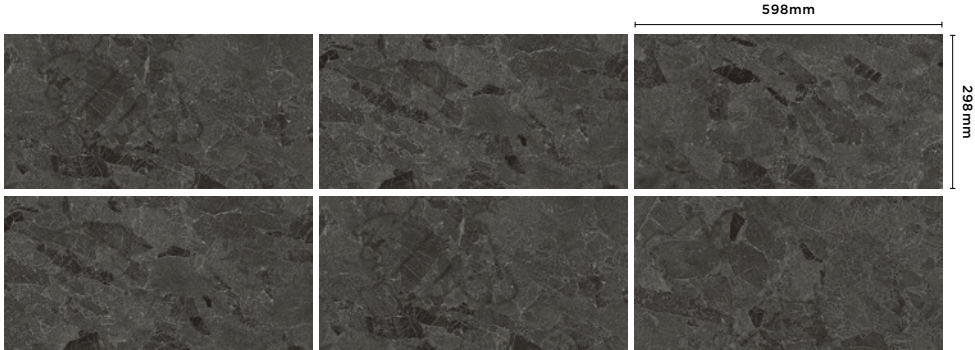

DLEN 03 Soft Textured

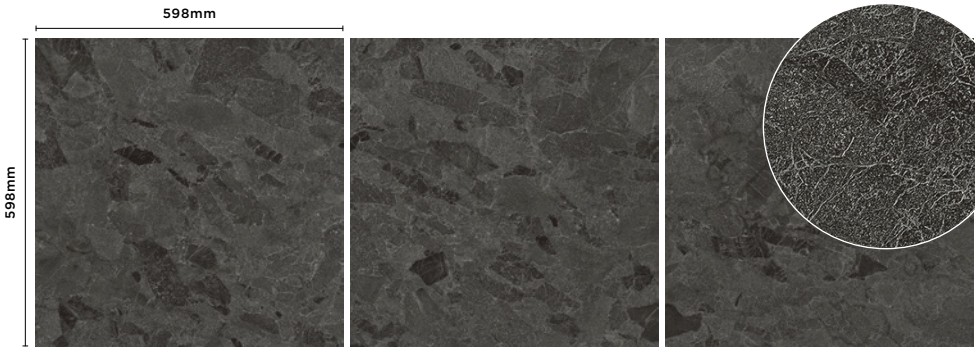

DLEN 0 Soft Textured

# Eme

Technical Data

Product Type: Glazed Porcelain (BS EN 14411 – Group BIa)

Use: Floors & Walls

Product Code: DLEN

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R9 from 3° to 10° R11 from 19° to 27°	Soft Textured Natural Grip
Areas with bare feet	DIN 51097	A over 12° to 18° C over 24°	Soft Textured Natural Grip
Slip resistance (Pendulum) Coefficient of friction	BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm <sup>2</sup>	≥ 52 N/mm <sup>2</sup> (Typical value)
Breaking strength	BS EN ISO 10545-4	≥ 1300 N	≥ 2500 N (Typical value)
Resistance to surface abrasion	BS EN ISO 10545-7	PEI *see classifications below	Class 4 – DLEN 01 & 02 Class 3 – DLEN 03
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 <sub>FL</sub> /A1	A1 <sub>FL</sub> /A1
Recycled content			30%

\*PEI classifications  
PEI 2 - Light traffic  
PEI 3 - Light to moderate traffic  
PEI 4 - Moderate to heavy traffic  
PEI 5 - Heavy to extra heavy traffic

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale.  
May 2024

