

Biscuit


Ceramic Design



6 Colours / 1 Finish / 6 Patterns / 1 Size

Biscuit is a range of six opaque, gentle, geometrical, and three-dimensional surfaces designed to create architectural spaces using wall tiles brought to life by light and shadow. This ceramic tile range surprises with its dichotomy of versatility and simplicity.

Wall: DFZK 02 Strip Matt, DFZK 02 Plain Matt, DFZK 02 Dune Matt,
DFZK 02 Peak Matt, DFZK 02 Stud Matt & DFZK 02 Wave Matt

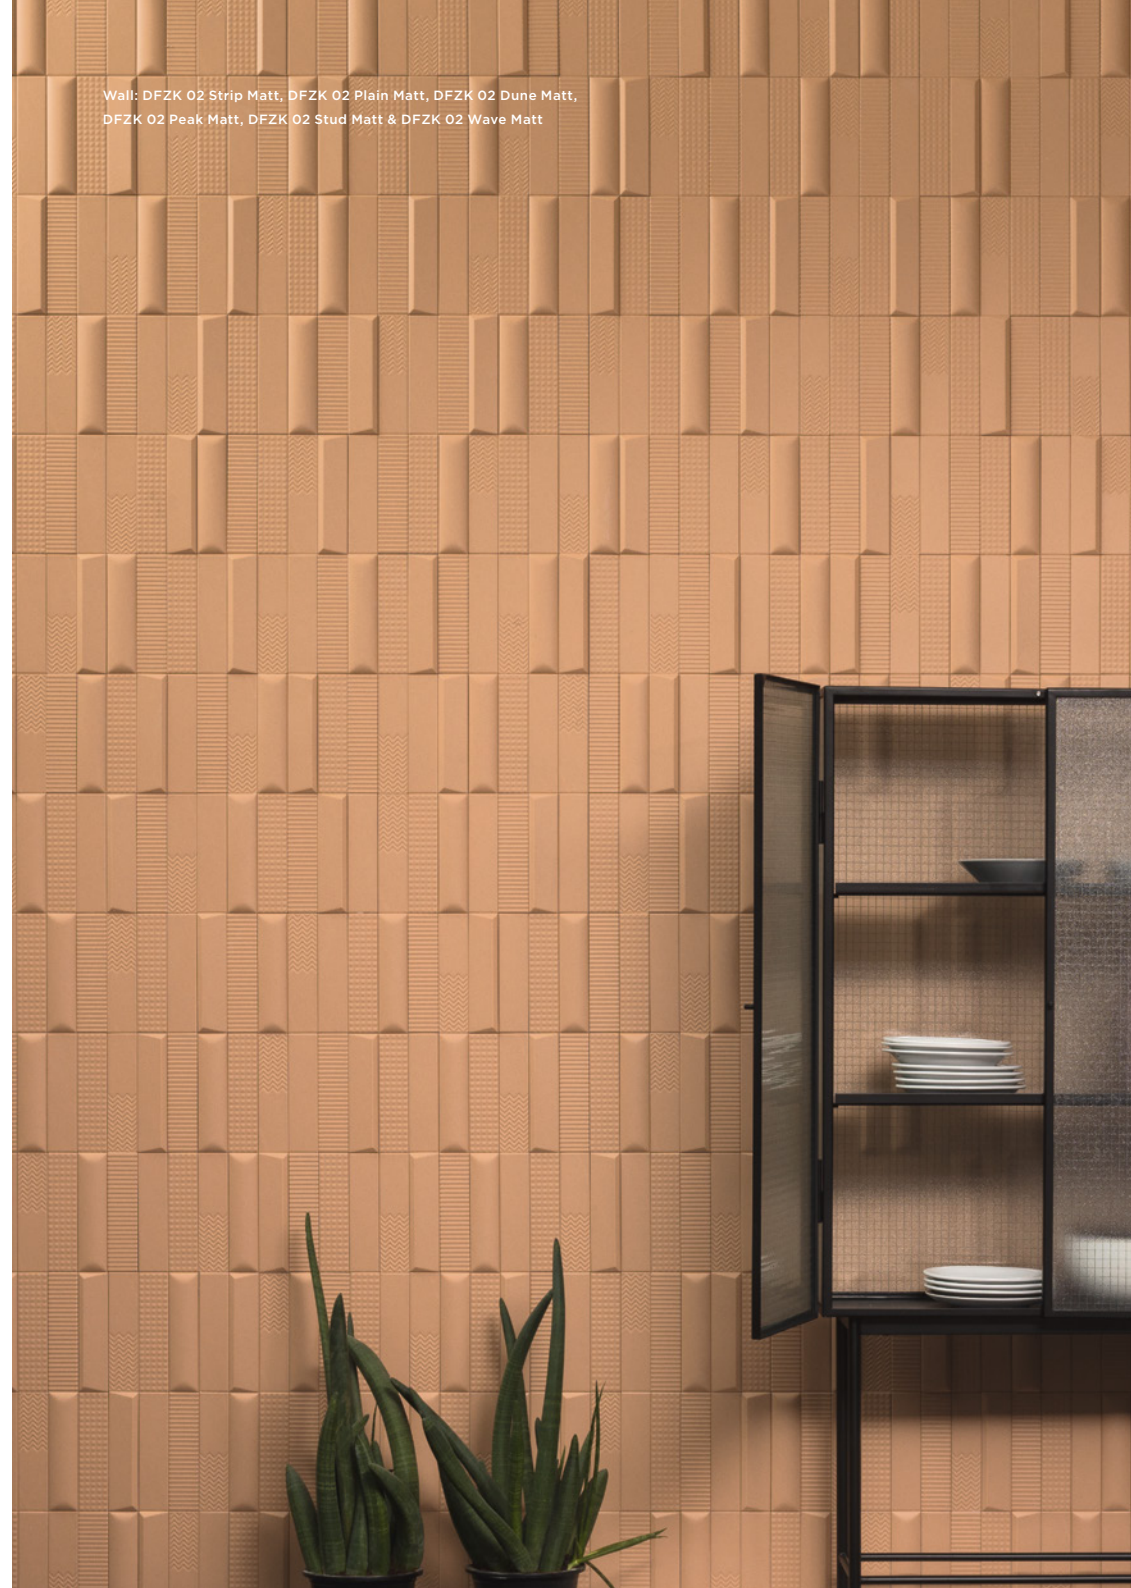



Wall (top): DFZK 06 Dune Matt
Wall (bottom): DFZK 06 Plain Matt



Wall: DFZK 05 Strip Matt, DFZK 05 Plain Matt, DFZK 05 Dune Matt, DFZK 05 Peak Matt, DFZK 05 Stud Matt & DFZK 05 Wave Matt
Recessed Shelf: DFZK 06 Plain Matt



Wall: DFZK 04 Strip Matt



Wall: DFZK 03 Peak Matt



DFZK 01 Plain



DFZK 01 Dune



DFZK 01 Peak



DFZK 01 Strip



DFZK 01 Stud



DFZK 01 Waves



DFZK 05 Plain



DFZK 05 Dune



DFZK 05 Peak



DFZK 05 Strip



DFZK 05 Stud



DFZK 05 Waves



DFZK 03 Plain



DFZK 03 Dune



DFZK 03 Peak



DFZK 03 Strip



DFZK 03 Stud



DFZK 03 Waves




DFZK 02 Plain



DFZK 02 Dune



DFZK 02 Peak



DFZK 02 Strip



DFZK 02 Stud



DFZK 02 Waves



DFZK 04 Plain



DFZK 04 Dune



DFZK 04 Peak



DFZK 04 Strip



DFZK 04 Stud



DFZK 04 Waves



DFZK 06 Plain




DFZK 06 Dune



DFZK 06 Peak



DFZK 06 Strip



DFZK 06 Stud



DFZK 06 Waves

Sizes



	Size (mm)	Thickness	Finish	Colour Availability
1	Plain 200 x 50 (N)	8	Matt	All colours
	Dune 200 x 50 (N)	8	Matt	All colours
	Peak 200 x 50 (N)	8	Matt	All colours
	Strip 200 x 50 (N)	8	Matt	All colours
	Stud 200 x 50 (N)	8	Matt	All colours
	Waves 200 x 50 (N)	8	Matt	All colours

(N) Nominal size - pressed edge. For wall use only. Swatch colours may vary from original. Samples should be requested.

V1 - Low
Shade Variation

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Biscuit

Technical Data

Product Type: Glazed Ceramic (BS EN 14411 – Group BIII)

Use: Walls (Internal only)

Product Code: DFZK

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.50% (max. ±2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 10% (max. ±0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.30% (max. ±1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ±2.0mm)	Conforms
Planarity (flatness): Centre curvature	BS EN ISO 10545-2	+ 0.5% (max. +2.0mm) - 0.3% (max. - 1.5mm)	Conforms
Edge curvature	BS EN ISO 10545-2	+ 0.5% (max. +2.0mm) - 0.3% (max. - 1.5mm)	Conforms
Warpage	BS EN ISO 10545-2	± 0.5% (max. ±2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	> 10%	16% (Typical value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 7.5mm thick ≥ 12 N/mm ²	Conforms
Resistance to surface abrasion	BS EN ISO 10545-7	PEI	Class 4
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Conforms
Crazing resistance	BS EN ISO 10545-11	No visible defects	Conforms
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHB
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3	≥ 4
Reaction to fire	Based on the decision 96/603/EC and its changes	A1	A1
Recycled content			0%

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. December 2019



DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com