

# LX Hausys Harmony Tranquillity

*Engineered Vinyl*



Floor: EVLX 201-HT Matt

12 Colours / 1 Finish / 2 Sizes

LX Hausys Harmony Tranquillity is a range of traditional woodblock pieces offering huge design potential. The contemporary colours can be combined with various laying patterns to create the perfect balance for your space.



Floor: EVLX 212-HT Matt




EVLX 207-HT




EVLX 202-HT




EVLX 210-HT



EVLX 201-HT



EVLX 205-HT




EVLX 204-HT



EVLX 208-HT




EVLX 203-HT




EVLX 209-HT



EVLX 206-HT



EVLX 212-HT



EVLX 211-HT

# Sizes



	Size (mm)	Thickness	Finish	Colour Availability
1	Dryback 114.3 x 457.2	2.5	Matt	All colours


Swatch colours may vary from original. Samples should be requested.

## Specification


Format:	Strip or Herringbone
Treatment:	PUR
Edge Detail:	4-way bevel
Sustainability:	100% phthalate-free. Low VOC.
Durability:	Class 23 Domestic Class 33 Commercial Class 42 Industrial
Application:	Internal use only. Suitable with underfloor heating
Installation:	Recommended for bonded installation
Wear Layer:	0.55mm
Residential Warranty:	30 years
Commercial Warranty:	10 years

# Layout Options


---

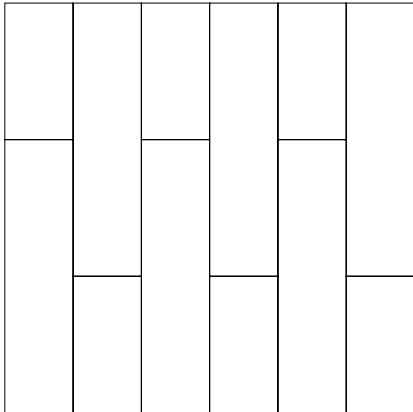


Brickbond Strip

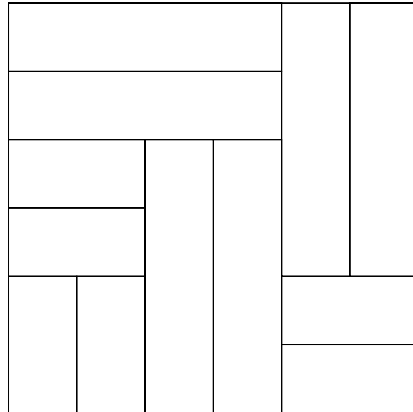


Double Herringbone

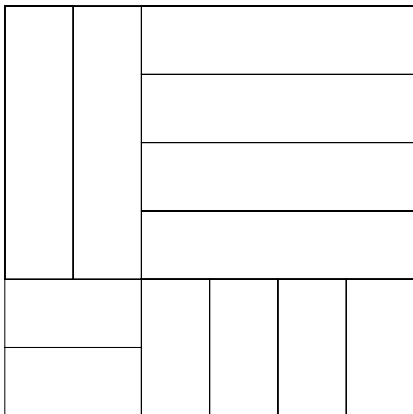


Basket

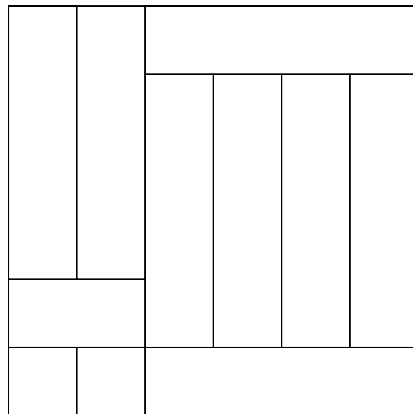

Staggered Basket

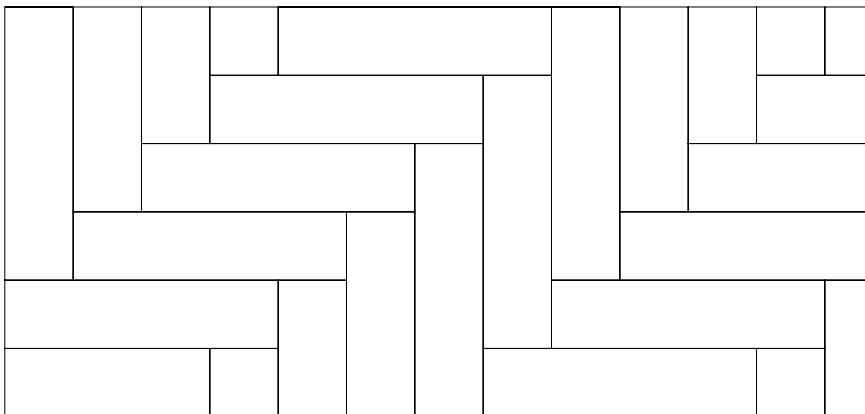

Herringbone

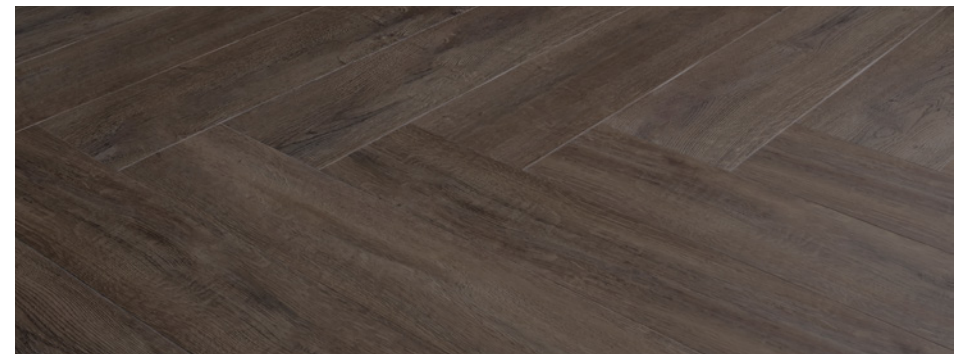

LX Hausys Harmony Tranquillity can be installed in a variety of laying patterns allowing you to personalise your floor.

**DOMUS**

service@domusgroup.com | t: 020 8481 9567 | domusgroup.com

# LX Hausys Harmony Tranquillity

Technical Data

## PERFORMANCE & DURABILITY

Technical Characteristics	Industry Standard	Performance
Type of Flooring	EN ISO 10582	PVC Heterogeneous
Straightness & Squareness	EN ISO 24342	≤ 0.15% / ≤ 0.35mm
Classification	EN ISO 10874	Class 23/33/42
Weight	EN ISO 23997	4.5kg/sqm
Wear Resistance	EN 660-2	T
Residual Indentation	EN ISO 24343-1	≤ 0.1mm
Dimensional Stability	EN ISO 23999	< 0.10%
Curling	EN ISO 23999	≤ 2mm
Light Fastness	EN ISO 105-B02	≥ 6
Furniture Leg Resistance	EN ISO 16581	No Crack, No Damage
Castor Chair Resistance	EN ISO 4918	No Change
Burning Characteristic	EN 13501-1	Bfl-s1

NB: Compatible with underfloor heating systems - subject to M50 installation advice available on request.

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group Limited cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Warranty is valid only when installed in accordance with LX Hausys Installation & Maintenance guide. Errors & omissions excepted. Please refer to Domus Group Limited Terms & Conditions of Sale, March 2024

# Technical Data

Engineered Vinyl

## PERFORMANCE & DURABILITY

Technical Characteristics	Industry Standard	Performance
Stain Resistance	EN ISO 26987	No Change PUR Surface Treatment
Slip Resistance	EN 13893	Class DS
Slip Restraint	DIN 51130	R10
Acoustic Insulation	EN ISO 717-2	3dB
Electrostatic Performance	EN 1815	< 2kV
Thermal Resistance	EN ISO 12667	0.0042m <sup>2</sup> .K/W
Underfloor Heating		Suitable Max. 29.4°C   85°F
Formaldehyde Group	EN 14041:2004/AC:2006	E1
CE Marking	EN 14041:2004/AC:2006	DOP N° 23EDB-DOP-33
TVOC After 28 Days	ISO 16000	A+ (Eurofins 392-201800200803_E_EN)
REACH	N° SVHC	SGS AYAA18-62889

NB: Compatible with underfloor heating systems - subject to M50 installation advice available on request.

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group Limited cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Warranty is valid only when installed in accordance with LX Hausys Installation & Maintenance guide. Errors & omissions excepted. Please refer to Domus Group Limited Terms & Conditions of Sale, March 2024



**DOMUS**

service@domusgroup.com | t: 020 8481 9567 | domusgroup.com