

Kaleidos

Ceramic Colours



11 Colours / 2 Finishes / 1 Size

Kaleidos is a beautiful range of ceramic tiles for walls made with deep rich colour glazes and produced in a singular rectangular format. Its blended shade variation on an undulating surface provides a stylish craft-like handmade product.





Wall: DWKL 03 Gloss



Wall: DWKL 02 Gloss



Wall: DWKL 06 Gloss

Matt Colours




DWKA 01




DWKA 02



DWKA 04

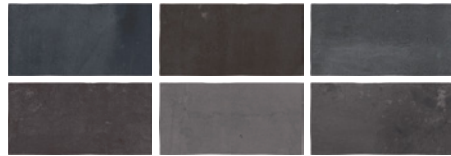

DWKA 09

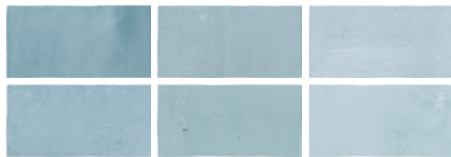

DWKA 05



DWKA 08



DWKA 03



DWKA 07



DWKA 06


Gloss Colours




DWKL 01




DWKL 02

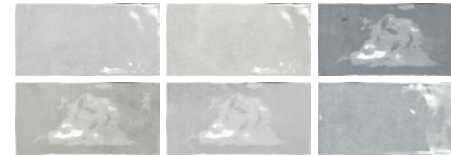


DWKL 04

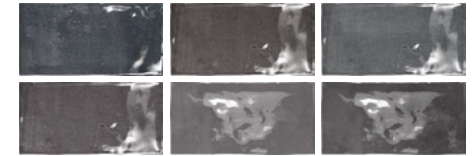

DWKL 09

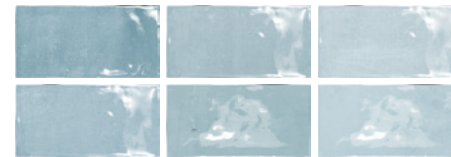


DWKL 05

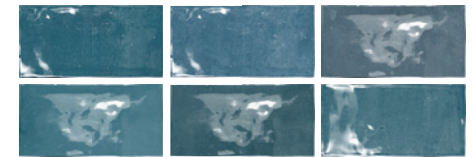


DWKL 08



DWKL 03

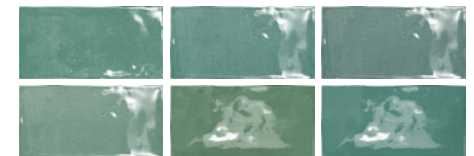

DWKL 07

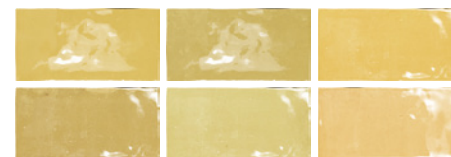

DWKL 06



DWKL 10



DWKL 11




Wall: DWKA 01 Matt & DWKL 01 Gloss

Sizes



	Size (mm)	Thickness	Finish	Colour Availability
1	125.7 x 62.3 (N)	10	Matt Gloss	All DWKA colours All DWKL colours
	Bullnose 125.7 x 35 (N)	10	Matt Gloss	All DWKA colours DWKL 01 - 09

(N) Nominal size – pressed edge. For wall use only. Swatch colours may vary from original. Samples should be requested. Each colour contains a randomly blended mix of 12 different shades, except DWKL 10 & 11. Each colour also contains 16 randomly blended subtly different textures.



V4 - Random
Shade Variation

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Kaleidos

Technical Data

Product Type: Glazed Ceramic (BS EN 14411 – Group BIII)

Use: Walls (Internal only)

Product Code: DWKL/DWKA

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement (for nominal size N)		Actual Value
		70mm ≤N<150mm	N ≥ 150mm	
Length & width	BS EN ISO 10545-2	± 0.75mm	± 0.5% (max. ±2.0mm)	Conforms

NOTE: THIS IS AN ARTISAN PRODUCT DESIGNED TO HAVE AN IRREGULAR SURFACE & EDGE PROFILES. DIMENSIONS MAY VARY. TILES MAY CONTAIN SMALL IMPERFECTIONS / TINY CHIPS ON EDGES.

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	> 10%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 7.5mm thick ≥ 12 N/mm²	Conforms
Crazing resistance	BS EN ISO 10545-11	No visible defects	Resistant (Except metallic finishes – DWKL 10 & 11)*
Chemical resistance:			
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHA (Except metallic finishes)*
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes		A1
Recycled content			61%
* Note: Avoid using metallic finishes in showers (due to micro crazing). Metallic finishes should only be cleaned with neutral detergents (no acidic or strongly alkaline products).			



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. February 2025