

# Dechirer La Suite

*Porcelain Design*



Wall: DTDL 01 Net

**3 Colours / 2 Finishes / 3 Sizes**

Dechirer La Suite is a range extension of the award-winning range designed by Spanish-born designer, Patricia Urquiola. Unglazed finishes in grey tones.

**Design** Patricia Urquiola

MU  
TIN  
A



Floor: DTDL 04 Trace



DTDL 01 Net




DTDL 01 Trace



DTDL 03 Net



DTDL 03 Trace

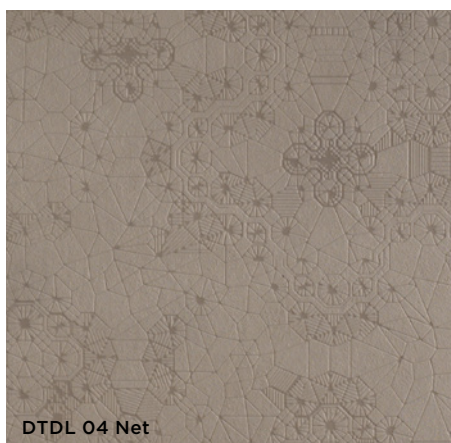


DTDL 04 Net



DTDL 04 Trace

# Sizes

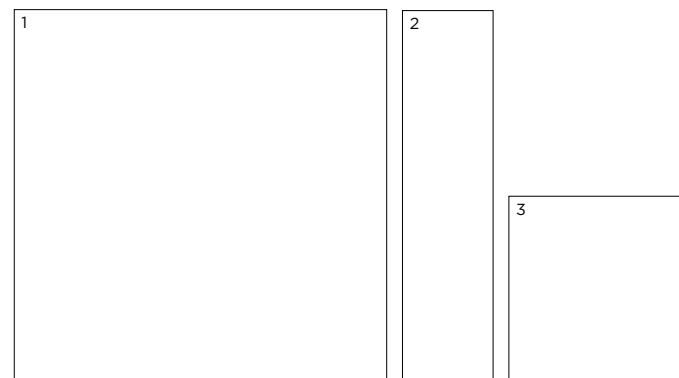

	Size (mm)	Thickness	Finish	Colour Availability
1	1190 x 1190 (R)	12	Trace Net	All colours
2	1190 x 296 (R)	12	Trace Net	All colours
3	594 x 594 (R)	12	Trace Net	All colours

(R) Rectified size / Squared edge with bevel.  
 Swatch colours may vary from original. Tile samples should be requested.

# Dechirer La Suite

## Technical Data

**Product Type:** Unglazed Porcelain (BS EN 14411 – Group Bla)

**Use:** Floors & Walls

**Product Code:** DTDL

### DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

### SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R11 from 19° to 27°	Net & Trace
Areas with bare feet	DIN 51097	B over 18° to 24°	Net & Trace
Slip resistance Coefficient of friction	BS 7976-2	Test results upon request	

### PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0.07% (typical value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm <sup>2</sup>	Conforms
Breaking strength	BS EN ISO 10545-4	≥ 1300 N	Conforms
Resistance to deep abrasion (unglazed tiles)	BS EN ISO 10545-6	≥ 175 mm <sup>3</sup>	Conforms
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	ULA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	UHA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB min.	UA
Stain resistance	BS EN ISO 10545-14	Declared value	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 <sub>FL</sub> /A1	A1 <sub>FL</sub> /A1
Recycled content			20%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. August 2020

**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com