

# Maps

Porcelain Concrete



5 Colours / 2 Finishes / 4 Sizes / 3 Mosaics

Maps is a porcelain tile range representing the perfect blend of aesthetics, functionality, sense and sensibility. The texture merges with the light, clean lines of the range inspired by the industrial simplicity of concrete, which gives it the appearance of strength and permanence.





Pillar: DCPM 02 3D Mosaic Natural  
Floor: DCPM 02 Natural



Floor: DCPM 05 Natural

# Sizes



DCPM 01



DCPM 03




DCPM 05



DCPM 02



DCPM 04

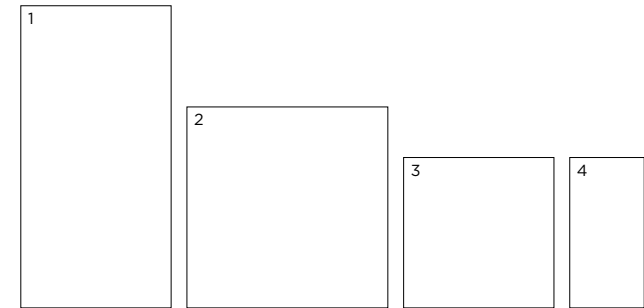


	Size (mm)	Thickness	Finish	Colour Availability
1	1197 x 597 (R)	9	Natural	All colours
2	797 x 797 (R)	9	Natural	All colours
3	597 x 597 (R)	9	Natural	All colours
4	597 x 297 (R)	9	Natural Bush Hammered	All colours All colours

(R) Rectified size - square edge with bevel. Mosaics and special pieces shown on next page. Swatch colours may vary from original. Samples should be requested.


# Mosaics & Special Pieces

## Mosaic 27 x 27mm

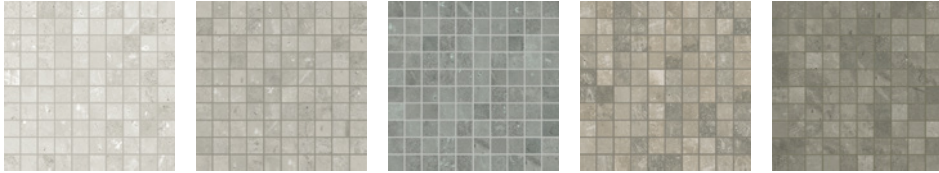


DCPM 01 Mosaic    DCPM 03 Mosaic    DCPM 05 Mosaic    DCPM 02 Mosaic    DCPM 04 Mosaic

## 3D Mosaic 47 x 47mm

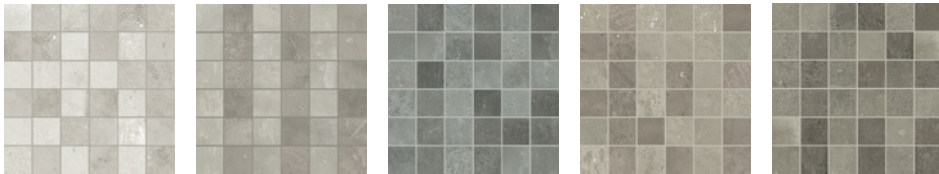

DCPM 01 3D Mosaic    DCPM 03 3D Mosaic    DCPM 05 3D Mosaic    DCPM 02 3D Mosaic    DCPM 04 3D Mosaic


## Listello Sfalsato Mosaic



DCPM 01 Listello Sfalsato Mosaic    DCPM 03 Listello Sfalsato Mosaic    DCPM 05 Listello Sfalsato Mosaic



DCPM 02 Listello Sfalsato Mosaic    DCPM 04 Listello Sfalsato Mosaic

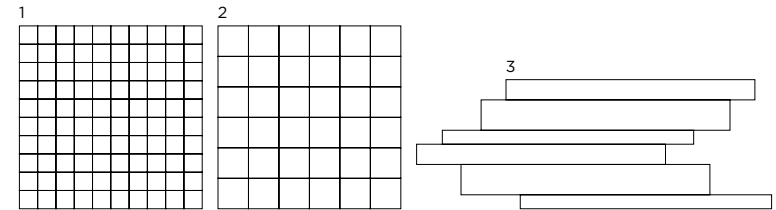


	Size (mm)	Thickness	Finish	Colour Availability
1	Mosaic 27 x 27 (R) on 297 x 297 sheet	9	Natural	All colours
2	3D Mosaic 47 x 47 (R) on 297 x 297 sheet	9	Natural	All colours
3	Listello Sfalsato Mosaic (R) on 400 x 210 sheet	9	Natural	All colours
	Plinth Skirting 597 x 46 (R)	9	Natural	All colours

(R) Rectified size - square edge with bevel. Swatch colours may vary from original. Samples should be requested.




## V2 - Moderate Shade Variation

---

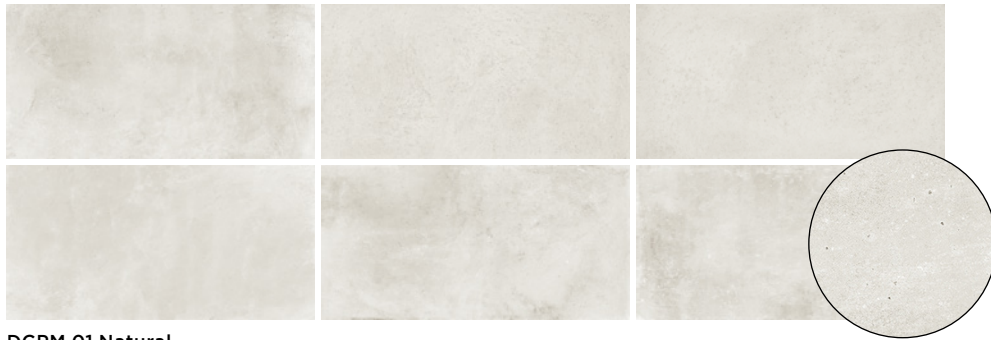


DCPM 01 Natural

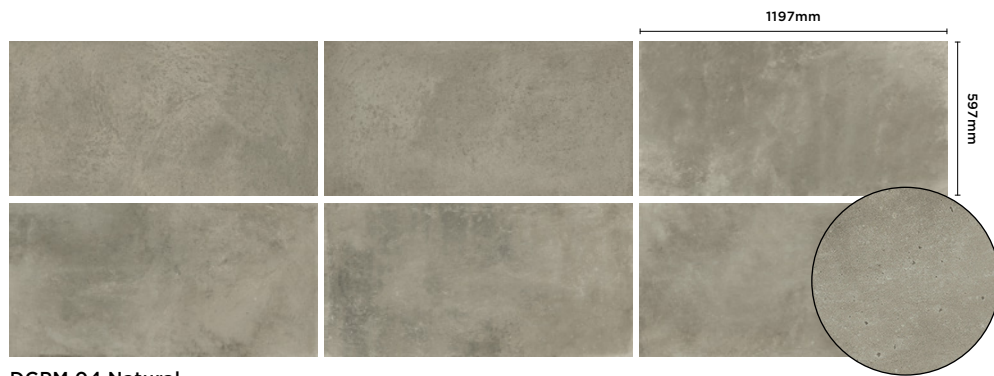

DCPM 04 Natural

## V3 - High Shade Variation


---

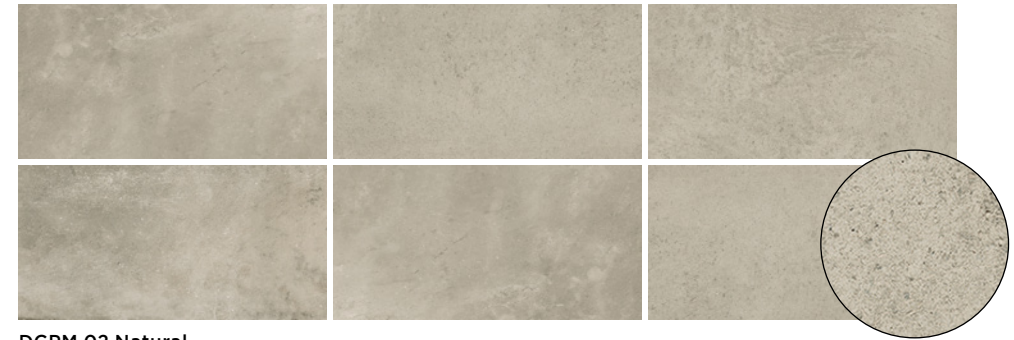

DCPM 02 Natural



DCPM 03 Natural

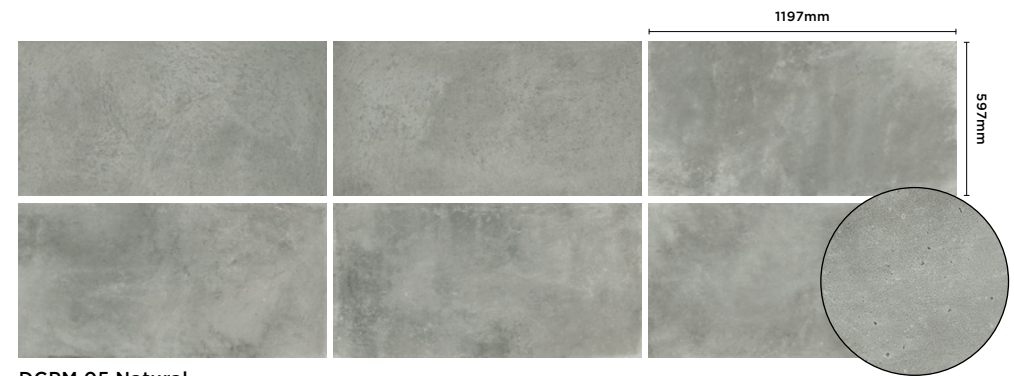

DCPM 05 Natural

# Maps

## Technical Data

**Product Type:** Glazed Porcelain (BS EN 14411 – Group BIa)

**Use:** Floors & Walls

**Product Code:** DCPM

### DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

### SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN 16165 Annex B	R10 from 10° to 19° R11 from 19° to 27°	Natural Bush Hammered
Areas with bare feet	BS EN 16165 Annex A	A over 12° to 18° C over 24°	Natural Bush Hammered
Slip resistance (Pendulum) Coefficient of friction	BS EN 16165 Annex C	Test results upon request	

### PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0.08% (Typical value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm <sup>2</sup>	50 N/mm <sup>2</sup> (Typical value)
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm ≥ 1300 N	2200 N (Typical value)
Resistance to surface abrasion (glazed tiles)	BS EN ISO 10545-7	PEI *see classifications below	Class 3 - DCPM 02, 03, 04 & 05 Class 4 - DCPM 01
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3 – glazed	Class 4-5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 <sub>FL</sub> /A1	A1 <sub>FL</sub> /A1
Recycled content			20.5%

#### \*PEI classifications

PEI 1 - Very light traffic  
 PEI 2 - Light traffic  
 PEI 3 - Light to moderate traffic  
 PEI 4 - Moderate to heavy traffic  
 PEI 5 - Heavy to extra heavy traffic



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. April 2024

# DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com