Haven

Porcelain Concrete

Floor: DAVP 04 Matt

5 Colours / **1** Finish / **3** Sizes

Haven is a range of porcelain tiles that captures the essence of industrial and contemporary concrete style. Inspired by the texture and appearance of worn cement, this range offers a clean, minimalist design that adapts perfectly to any setting.

Wall & Floor: DAVP 02 Matt

Wall & Floor: DAVP 03 Matt

Wall: DAVP 01 Matt

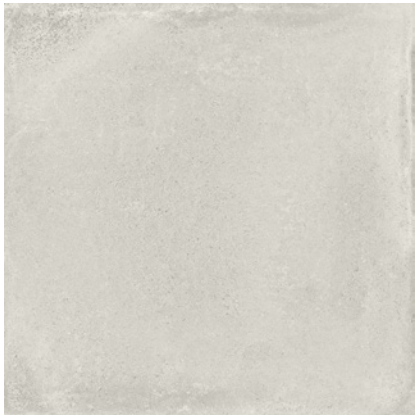

DAVP 01

DAVP 02

DAVP 03

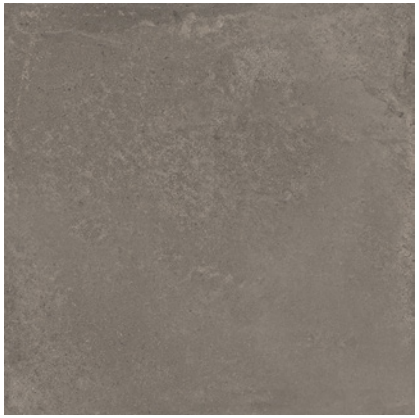

DAVP 04

DAVP 05

Sizes

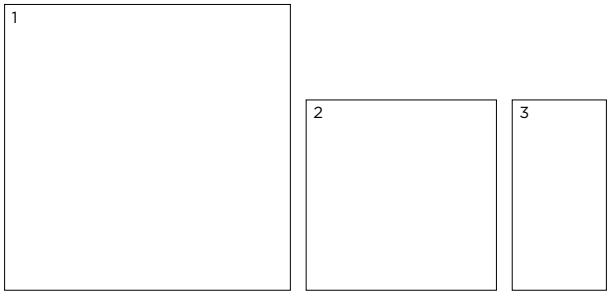

	Size (mm)	Thickness	Finish	Colour Availability
1	900 x 900 (R)	9	Matt	All colours
2	600 x 600 (N)	9	Matt	All colours
3	600 x 298 (N)	9	Matt	All colours

(R) Rectified size – square edge with bevel. (N) Nominal size – pressed edge. Swatch colours may vary from original. Samples should be requested. Special pieces shown on next page.

V3 – High
Shade Variation

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Wall & Floor: DAVP 05 Matt

Special Pieces

	Size (mm)	Thickness	Finish	Colour Availability
1	Skirting			
	900 x 90	9	Matt	All colours
	600 x 90	9	Matt	All colours
2	Bullnose Step Tread			
	900 x 300	9	Matt	All colours
	600 x 300	9	Matt	All colours
3	Step Tread			
	900 x 300	9	Matt	All colours
	600 x 300	9	Matt	All colours

Swatch colours may vary from original. Samples should be requested.

V3 – High
Shade Variation

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Haven

Technical Data

Product Type: Glazed Porcelain (BS EN 14411 – Group BIa)
Use: Floors & Walls
Product Code: DAVP

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN 16165 Annex B	R9 from 3° to 10° R10 from 10° to 19°	Matt Anti-Slip
Slip resistance (Pendulum) Coefficient of friction	BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm^2	Conforms
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm ≥ 1300 N	Conforms
Resistance to surface abrasion (glazed tiles)	BS EN ISO 10545-7	PEI *see classifications below	Class 4
Linear thermal expansion coefficient	BS EN ISO 10545-8	Declared value	< 9*10-6/°C (Typical value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3 – glazed	Conforms
Reaction to fire	Based on the decision 96/603/EC and its changes	$A1_{FL}$/A1	$A1_{FL}$/A1
Recycled content			16%

***PEI classifications**
PEI 1 – Very light traffic
PEI 2 - Light traffic
PEI 3 - Light to moderate traffic
PEI 4 - Moderate to heavy traffic
PEI 5 - Heavy to extra heavy traffic

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale.
January 2026

DOMUS
service@domusgroup.com | t: 020 8481 9500 | domusgroup.com