

Kasbah

Ceramic Colours



21 Colours / 2 Finishes / 1 Size

Kasbah is a creative result of North African tradition meeting industrial ceramics. These wall-only tiles with a hand-crafted look contain many visible variations in tone—a successful encounter between tradition and design evolves and reworks the theme of colour, revealing an unexpected contemporary personality.







Wall: DMKA 02 Glossy



Wall: DMKA 08 Lux

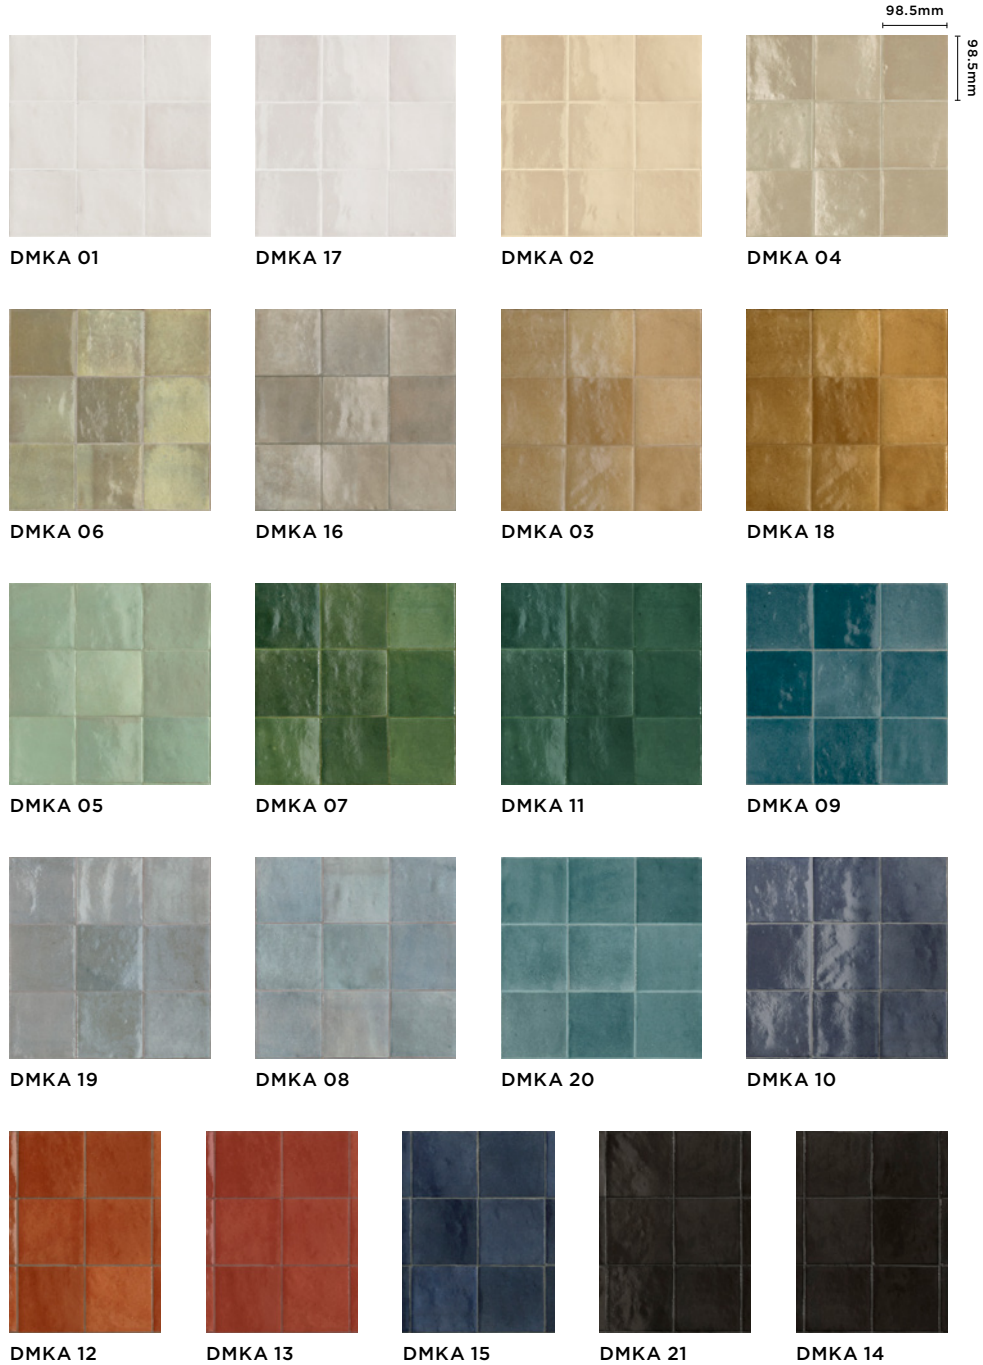


Sizes



	Size (mm)	Thickness	Finish	Colour Availability
1	98.5 x 98.5 (N)	10	Lux Glossy	DMKA 01, 03-09, 12 & 14-16 DMKA 02, 10, 11, 13 & 17-21

(N) Nominal size - pressed edge. Swatch colours may vary from original.
Samples should be requested. For use on internal walls only.



DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Kasbah

Technical Data

Product Type: Glazed Ceramic (BS EN 14411 - Group BIIa)

Use: Walls (Internal only)

Product Code: DMKA

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement (for nominal size <i>N</i>)		Actual Value
		70mm ≤ N < 150mm	N ≥ 150mm	
Length & width	BS EN ISO 10545-2	± 0.9mm	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 0.5mm	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%		Conforms

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	3% < Eb ≤ 6%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 22 N/mm ²	Conforms
Breaking strength	BS EN ISO 10545-4	≥ 1000 N	Conforms
Linear thermal expansion coefficient	BS EN ISO 10545-8	Declared value	≤ 9x10 ⁻⁶ / °C (Typical value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Chemical resistance:			
Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA-GLB
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHA-GHB
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Class 5
Colour resistance to light exposure	DIN 51094	No noticeable colour alteration	Resistant
Reaction to fire	Based on the decision 96/603/EC and its changes		A1
Recycled content			14%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. December 2021

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com