

# Floss

Porcelain Concrete



2 Colours / 2 Finishes / 7 Sizes / 4 Mosaics

Floss finds its inspiration in concrete with its irregular tonal variation and characteristic features reproduced in porcelain through the astute surface application of mineral salts. Refer to Floss Slim for lightweight porcelain slab options for use on walls and floors.



Wall: DLFS 02 Natural  
Floor: DLFS 02 Natural Grip


# Sizes



DLFS 01



DLFS 02

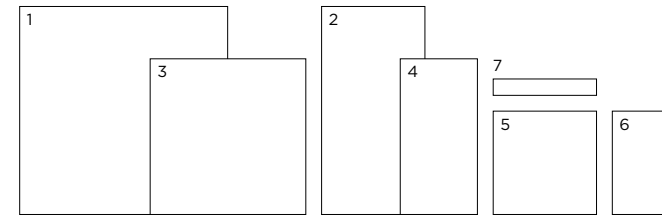


	Size (mm)	Thickness	Finish	Colour Availability
1	1198 x 1198 (R)	9	Natural Natural Grip	All colours All colours
2	1198 x 598 (R)	9	Natural Natural Grip	All colours All colours
3	898 x 898 (R)	9	Natural Natural Grip	All colours All colours
4	898 x 448 (R)	9	Natural Natural Grip	All colours All colours
5	598 x 598 (R)	9	Natural Natural Grip	All colours All colours
6	598 x 298 (R)	9	Natural Natural Grip	All colours All colours
7	598 x 98 (R)	9	Natural Natural Grip	All colours All colours


(R) Rectified size - squared edge with bevel. Mosaics shown on next page.  
Swatch colours may vary from original. Samples should be requested.

# Mosaics

Mosaic 25 x 25mm




DLFS 01




DLFS 02

Mosaic 55 x 55mm




DLFS 01



DLFS 02

Mosaic 150 x 30mm



DLFS 01



DLFS 02


Muretto Mosaic



DLFS 01



DLFS 02

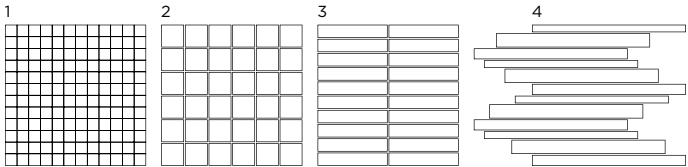

	Size (mm)	Thickness	Finish	Colour Availability
1	Mosaic 25 x 25 on 298 x 298 sheet	9	Natural	All colours
2	Mosaic 55 x 55 on 298 x 298 sheet	9	Natural	All colours
3	Mosaic 150 x 30 on 298 x 298 sheet	9	Natural	All colours
4	Muretto Mosaic on 298 x 298 sheet	9	Natural	All colours

Swatch colours may vary from original. Samples should be requested. Special pieces shown on next page.


# Special Pieces



Floor: DLFS 02 Natural

	Size (mm)	Thickness	Finish	Colour Availability
1	Skirting 1198 x 48	9	Natural	All colours
			Natural Grip	All colours
2	Skirting 898 x 48	9	Natural	All colours
			Natural Grip	All colours
3	Skirting 598 x 48	9	Natural	All colours
			Natural Grip	All colours
4	Step Tread 1198 x 333 x 30	9	Natural	All colours
			Natural Grip	All colours
5	Step Tread 898 x 333 x 30	9	Natural	All colours
			Natural Grip	All colours
6	Step Tread 598 x 333 x 30	9	Natural	All colours
			Natural Grip	All colours
7	Angle Step Tread 1198 x 333 x 30	9	Natural	All colours
			Natural Grip	All colours
8	Angle Step Tread 898 x 333 x 30	9	Natural	All colours
			Natural Grip	All colours
9	Angle Step Tread 598 x 333 x 30	9	Natural	All colours
			Natural Grip	All colours

Swatch colours may vary from original. Samples should be requested.



**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

# Floss

## Technical Data

**Product Type: Glazed Porcelain (BS EN 14411 – Group Bla)**

**Use: Floors & Walls**

**Product Code: DLFS**

### DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

### SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R9 from 3° to 10° R11 from 19° to 27°	Natural Natural Grip
Areas with bare feet	DIN 51097	A over 12° to 18° C over 24°	Natural Natural Grip
Slip resistance Coefficient of friction	BS 7976-2	Test results upon request	

### PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm <sup>2</sup>	Conforms
Breaking strength	BS EN ISO 10545-4	≥ 1300 N	Conforms
Resistance to surface abrasion	BS EN ISO 10545-7	PEI *see classifications below	Class 4 – DLFS 01 Class 3 – DLFS 02
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 <sub>FL</sub> /A1	A1 <sub>FL</sub> /A1
Recycled content			30%

**\*PEI classifications**  
 PEI 2 - Light traffic  
 PEI 3 - Light to moderate traffic  
 PEI 4 - Moderate to heavy traffic  
 PEI 5 - Heavy to extra heavy traffic



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. November 2019

**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com