

I Colori Lucido


Ceramic Colours



20 Colours / 1 Finish / 11 Sizes / 4 Mosaics

I Colori Lucido is a colourful range of frost-proof ceramic tiles suitable for use on walls, and floors with light traffic only. I Colori Lucido is available in modular sizes and can be combined with I Colori Matt, I Colori Full Body and I Colori Anti-Slip.





DCORL 01



DCORL 02




DCORL 03



DCORL 04



DCORL 05



DCORL 06



DCORL 07



DCORL 08



DCORL 09



DCORL 10



DCORL 11




DCORL 12



DCORL 13



DCORL 14



DCORL 15



DCORL 16



DCORL 17



DCORL 18




DCORL 19




DCORL 20

Sizes

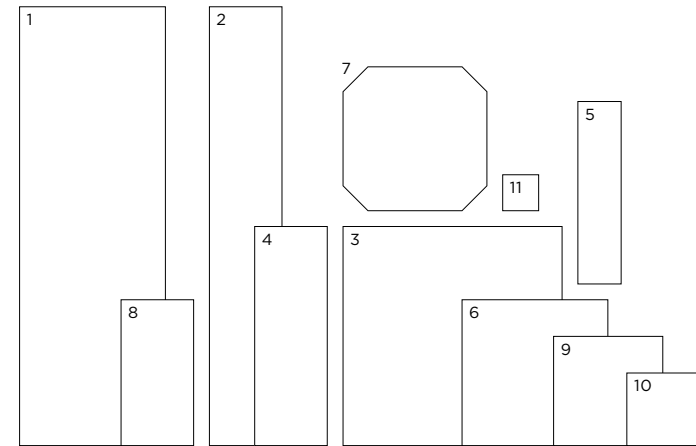

	Size (mm)	Thickness	Finish	Colour Availability
1	600 x 200 (N)	8	Lucido	DCORL 01, 02, 06 & 07
2	600 x 100 (N)	8	Lucido	DCORL 01, 02, 06 & 07
3	300 x 300 (N)	8	Lucido	DCORL 01
4	300 x 100 (N)	8	Lucido	DCORL 01, 02, 06 & 07
5	250 x 60 (N)	6.5	Lucido	DCORL 01, 06 & 07
6	200 x 200 (N)	6.5	Lucido	All colours
7	Octagon 200 x 200 (N)	5.5	Lucido	DCORL 01
8	200 x 100 (N)	6.5	Lucido	DCORL 01 & 05
9	150 x 150 (N)	6.5	Lucido	DCORL 01
10	100 x 100 (N)	6.5	Lucido	All colours
11	50 x 50 (N)	5.5	Lucido	All colours

(N) Nominal size - pressed edge. Swatch colours may vary from original. Samples should be requested. Mosaics shown on next page.



Mosaic 100 x 30mm



DCORL 01



DCORL 07




DCORL 02




DCORL 06


Mosaic 50 x 50mm




DCORL 08



DCORL 03




DCORL 04




DCORL 05




DCORL 09



DCORL 10



DCORL 11




DCORL 12


Mosaic 25 x 25mm




DCORL 01



DCORL 16




DCORL 14




DCORL 13


Mosaic 100 x 100mm




DCORL 20



DCORL 17




DCORL 12




DCORL 06

Mosaics

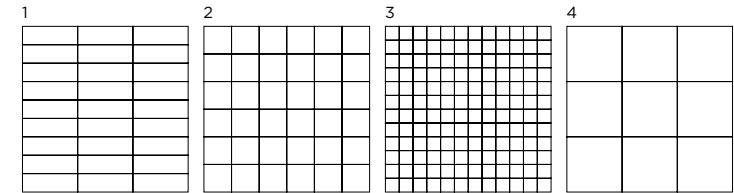

	Size (mm)	Thickness	Finish	Colour Availability
1	Mosaic 100 x 30 (N) on 300 x 300 sheet	5.5	Lucido	DCORL 01, 02, 06 & 07
2	Mosaic 50 x 50 (N) on 300 x 300 sheet	5.5	Lucido	All colours
3	Mosaic 25 x 25 (N) on 300 x 300 sheet	5.5	Lucido	All colours
4	Mosaic 100 x 100 (N) on 300 x 300 sheet	6.5	Lucido	All colours

(N) Nominal size - pressed edge. Swatch colours may vary from original. Samples should be requested.



I Colori Lucido

Technical Data

Product Type: Glazed Ceramic (BS EN 14411 – Group Blb)

Use: Floors & Walls

Product Code: DCORL

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Slip resistance	BS 7976-2	Test results upon request	
Coefficient of friction	BS EN 16165		

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	0.5% < Eb ≤ 3%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 30 N/mm ²	Conforms
Resistance to surface abrasion (glazed tiles)	BS EN ISO 10545-7	PEI *see classifications below	Class 2 – DCORL 06, 12, 13, 14, 15, 19 Class 3 – DCORL 03, 04, 05, 09, 10, 11, 17, 18, 20 Class 4 – DCORL 01, 02, 07, 08, 16
Linear thermal expansion coefficient	BS EN ISO 10545-8	Declared value	5x5x10 ⁻⁶ K ⁻¹ (Typical value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3 – glazed	Class 3
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	A1 _{FL} /A1

*PEI classifications

PEI 1 – Very light traffic

PEI 2 - Light traffic

PEI 3 - Light to moderate traffic

PEI 4 - Moderate to heavy traffic

PEI 5 - Heavy to extra heavy traffic



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. August 2020

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com