

# Pulver

*Porcelain Concrete*



Floor: DMPD 01 Matt

**5 Colours / 1 Finish / 1 Size**

A uniform porcelain concrete in contemporary cementitious colours. Smooth to touch, Pulver creates a sophisticated, modern design that evokes the tactile appeal of cement and a seamless minimal scheme.



Floor: DMPD 05 Matt




DMPD 01




DMPD 02



DMPD 03

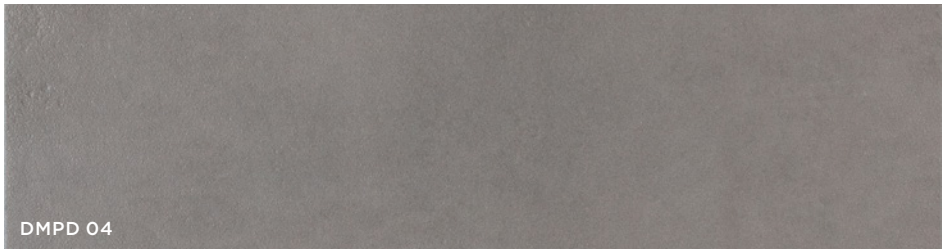


DMPD 04

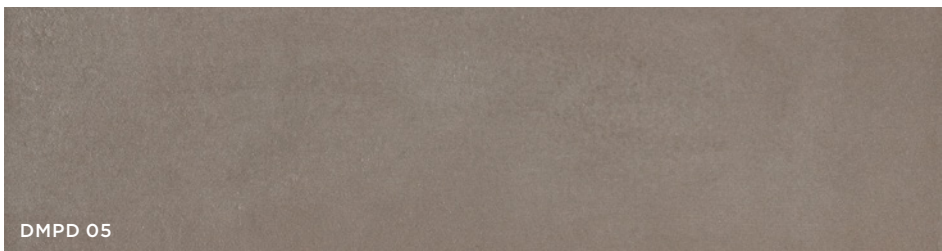


DMPD 05

# Sizes



	Size (mm)	Thickness	Finish	Colour Availability
1	450 x 450 (N)	9	Matt	All colours

(N) Nominal size - pressed edge. Swatch colours may vary from original. Samples should be requested.



# Pulver

Technical Data

**Product Type:** Unglazed Porcelain (BS EN 14411 – Group Bla)

**Use:** Floors & Walls

**Product Code:** DMPD

## DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

## SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R9 from 3° to 10°	Natural
Slip resistance Coefficient of friction	BS 7976-2	Test results upon request	

## PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm <sup>2</sup>	Conforms
Breaking strength	BS EN ISO 10545-4	≥ 1300 N	Conforms
Resistance to deep abrasion (unglazed tiles)	BS EN ISO 10545-6	≤ 175 mm <sup>3</sup>	Conforms
Resistance to surface abrasion	* Internal method	—	Class H
Linear thermal expansion coefficient	BS EN ISO 10545-8	Declared value	≤ 9 x 10 <sup>-6</sup> / °C (Typical value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	ULB-UUA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	UHB-UUA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB min.	UA
Stain resistance	BS EN ISO 10545-14	Declared value	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 <sub>FL</sub> /A1	A1 <sub>FL</sub> /A1
Recycled content			13%

\* Class H – Tiles suitable for situations of relatively hard abrasion in environments without protection against scratching, both public & private

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. July 2019



**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com