

Noon

Porcelain Stone



Floor: DLON 02 Soft Textured

3 Colours / 2 Finishes / 6 Sizes / 5 Mosaics


Noon is a soothing range of delicate stone effects with fossil inclusions that reveal, under close inspection, a unique manually chiselled appearance traditionally found only from exclusive stone quarries. Refer to Noon Slim and Noon Wall Slim for lightweight slab options in porcelain and ceramic.



Wall & Floor: DLON 04 Soft Textured



Floor: DLON 01 Soft Textured

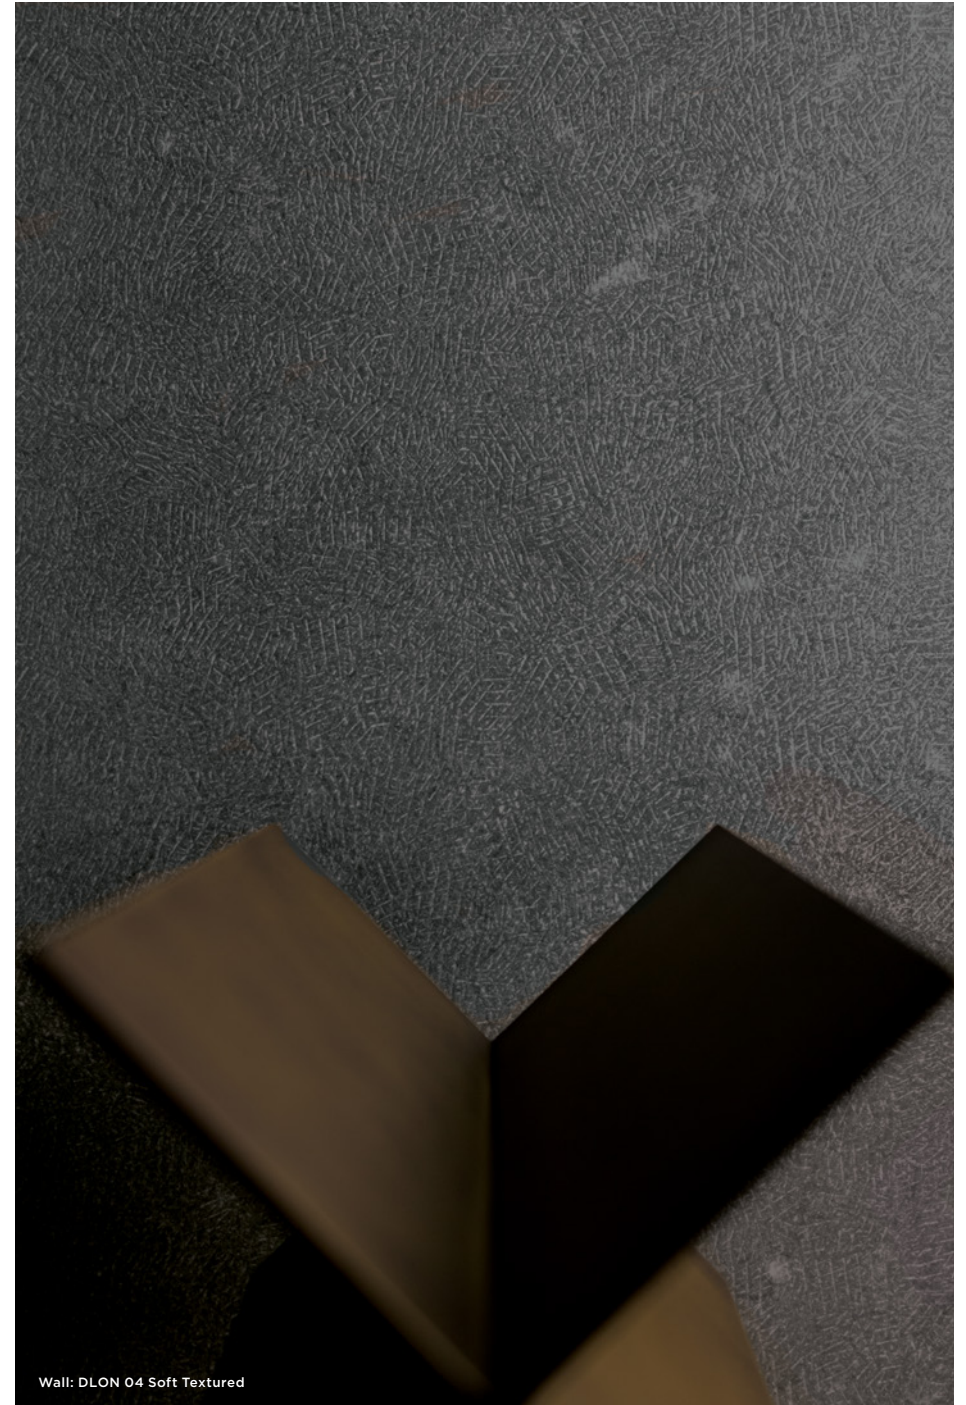

Wall: DLON 04 Soft Textured

Sizes




DLON 01



DLON 02




DLON 04

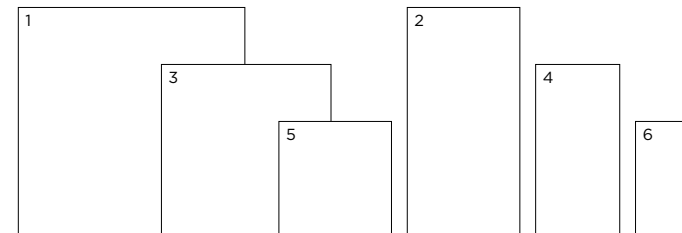


	Size (mm)	Thickness	Finish	Colour Availability
1	1198 x 1198 (R)	9	Soft Textured Natural Grip	All colours
2	1198 x 598 (R)	9	Soft Textured Natural Grip	All colours
3	898 x 898 (R)	9	Soft Textured Natural Grip	All colours
4	898 x 448 (R)	9	Soft Textured Natural Grip	All colours
5	598 x 598 (R)	9	Soft Textured Natural Grip	All colours
6	598 x 298 (R)	9	Soft Textured Natural Grip	All colours

(R) Rectified size – squared edge with bevel. Mosaics shown on next page.
Swatch colours may vary from original. Samples should be requested.


Mosaic 25 x 25mm

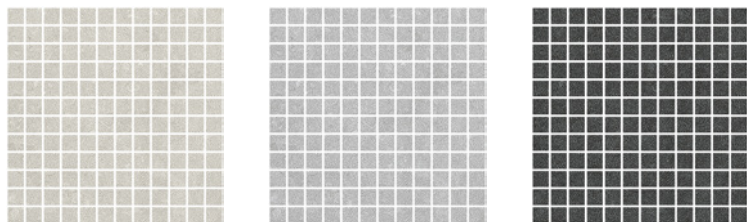

Mosaic 48 x 48mm

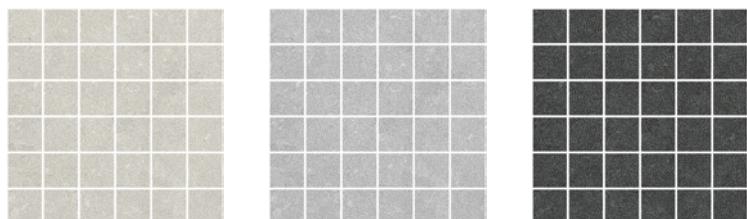


Mosaic 150 x 30mm

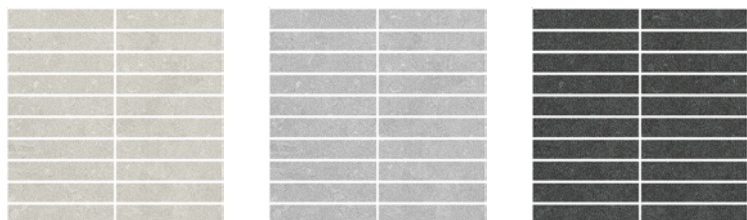

Muretto Mosaic



Deco Mosaic

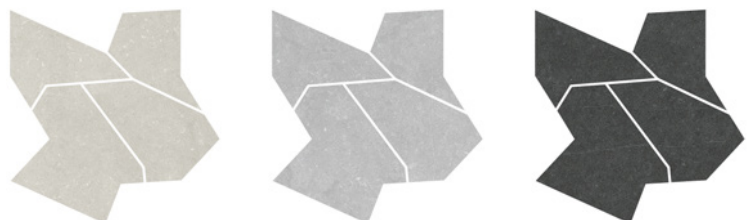


DLON 01

DLON 02


DLON 04

Mosaics & Special Pieces

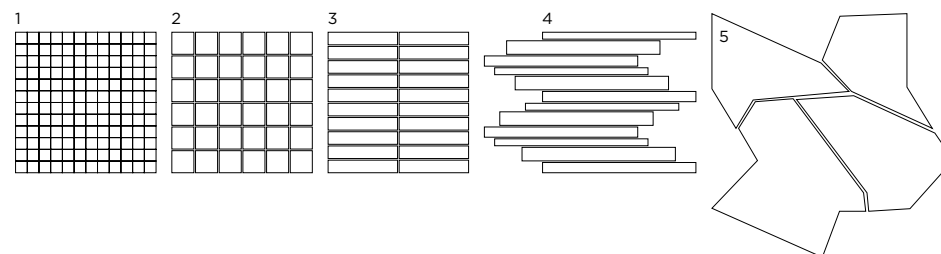

	Size (mm)	Thickness	Finish	Colour Availability
1	Mosaic 25 x 25 on 298 x 298 sheet	9	Soft Textured Natural Grip	All colours
2	Mosaic 48 x 48 on 298 x 298 sheet	9	Soft Textured Natural Grip	All colours
3	Mosaic 150 x 30 on 298 x 298 sheet	9	Soft Textured	All colours
4	Muretto Mosaic on 298 x 298 sheet	9	Soft Textured Natural Grip	All colours
	Deco Mosaic on 598 x 598 sheet	9	Soft Textured Natural Grip	All colours
	Skirting 1198 x 48 (R) 898 x 48 (R) 598 x 48 (R)	9	Soft Textured	All colours
	Step Tread 1198 x 333 (R) 898 x 333 (R) 598 x 333 (R)	30	All finishes	All colours
	Angle Step Tread 1198 x 333 (R) 898 x 333 (R) 598 x 333 (R)	30	All finishes	All colours


(R) Rectified size – squared edge with bevel. Step Treads and Angle Step Treads are available in both Soft Textured and Natural Grip finishes. Swatch colours may vary from original. Samples should be requested.




DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com


V2 - Moderate Shade Variation

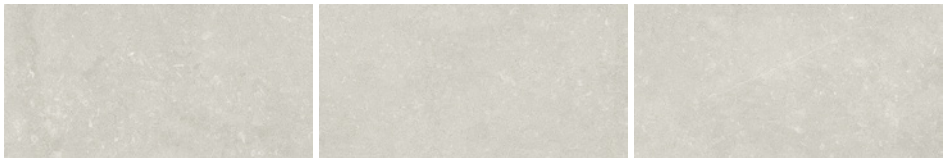


DLON 01 Soft Textured

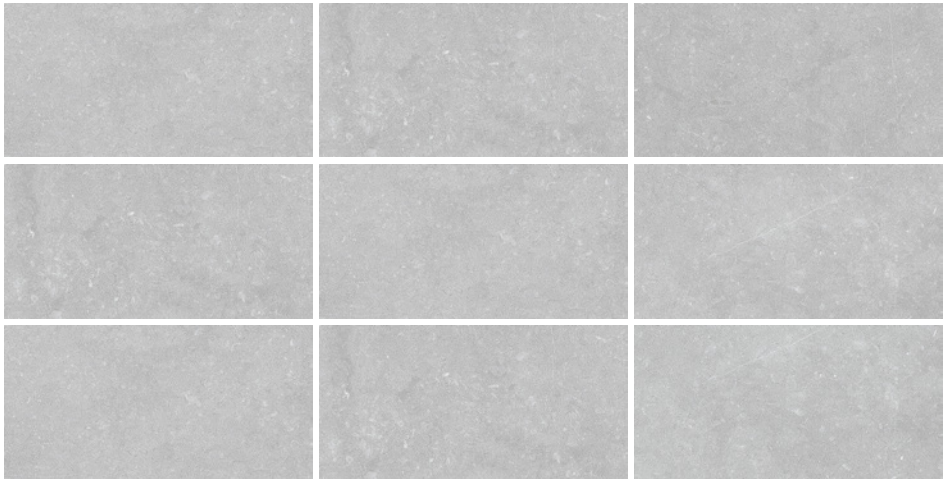


DLON 02 Soft Textured

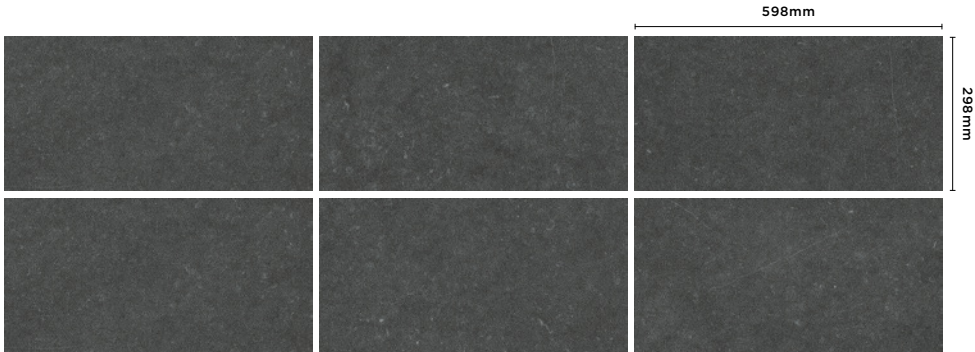


DLON 04 Soft Textured

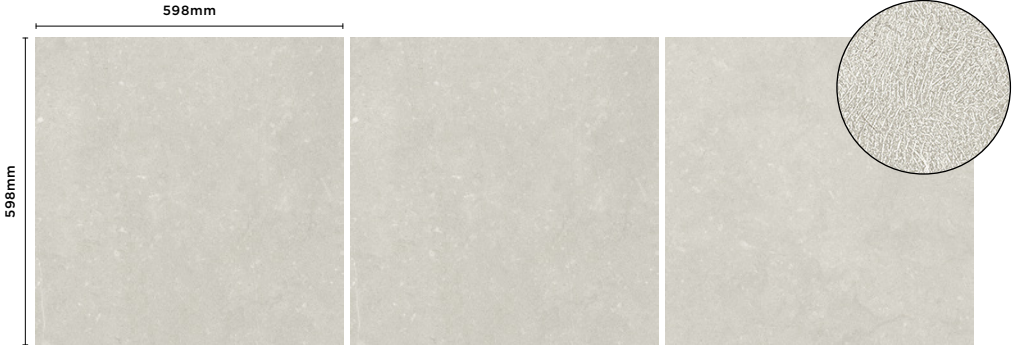

DLON 01 Soft Textured

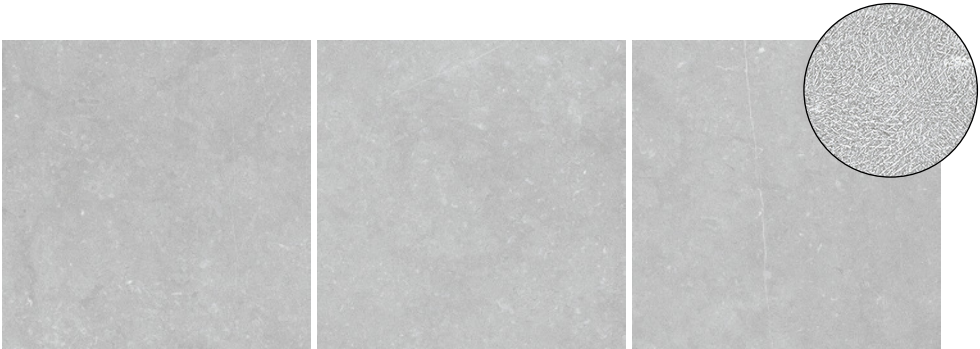

DLON 02 Soft Textured

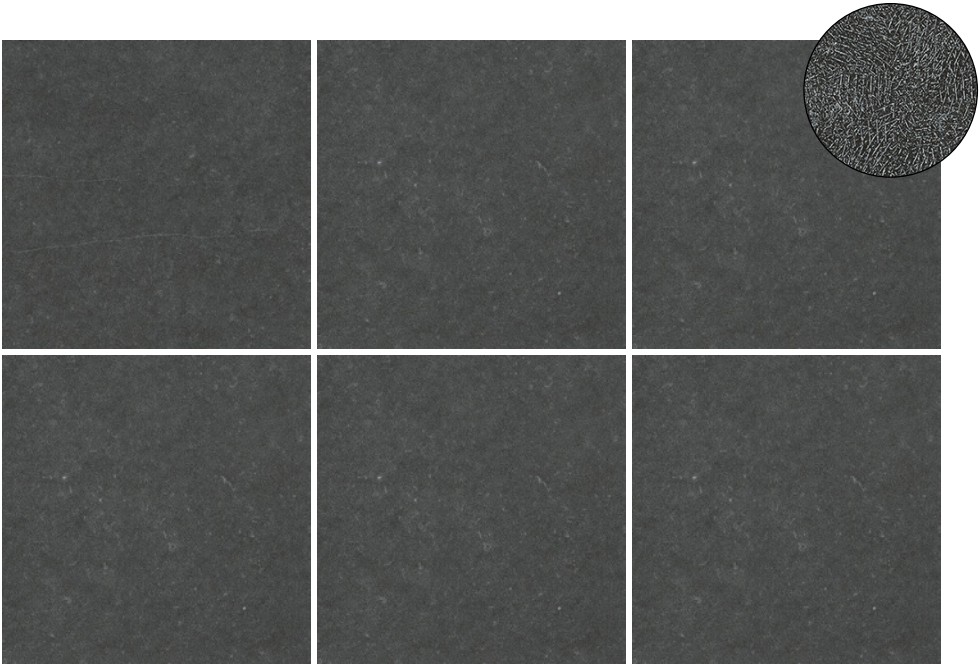

DLON 04 Soft Textured

Noon

Technical Data

Product Type: Glazed Porcelain (BS EN 14411 – Group Bla)

Use: Floors & Walls

Product Code: DLON

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R9 from 3° to 10° R11 from 19° to 27°	Soft Textured Natural Grip
Areas with bare feet	DIN 51097	A over 12° to 18° C over 24°	Soft Textured Natural Grip
Slip resistance Coefficient of friction	BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	≥ 52 N/mm ² (Typical value)
Breaking strength	BS EN ISO 10545-4	≥ 1300 N	≥ 2500 N (Typical value)
Resistance to surface abrasion	BS EN ISO 10545-7	PEI *see classifications below	Class 4 – DLON 01 & 02 Class 3 – DLON 04
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	A1 _{FL} /A1
Recycled content			30%

*PEI classifications
PEI 2 - Light traffic
PEI 3 - Light to moderate traffic
PEI 4 - Moderate to heavy traffic
PEI 5 - Heavy to extra heavy traffic



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale.
May 2024