

Prexious Magnum

Lightweight Slabs / Porcelain Marble




3 Colours / 2 Finishes / 7 Sizes / 2 Mosaics


Prexious Magnum is a range of elegant and luxury marble-effect porcelain slabs that capture the essence of exclusive natural stones. Only 6mm thick, in extra-large sizes. Refer to Prexious for 9mm-thick tile and mosaic options.

Wall: DMAG 84 Natural



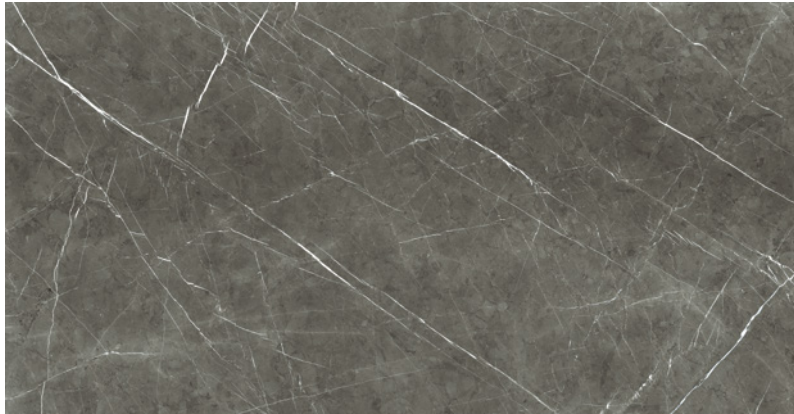

DMAG 82

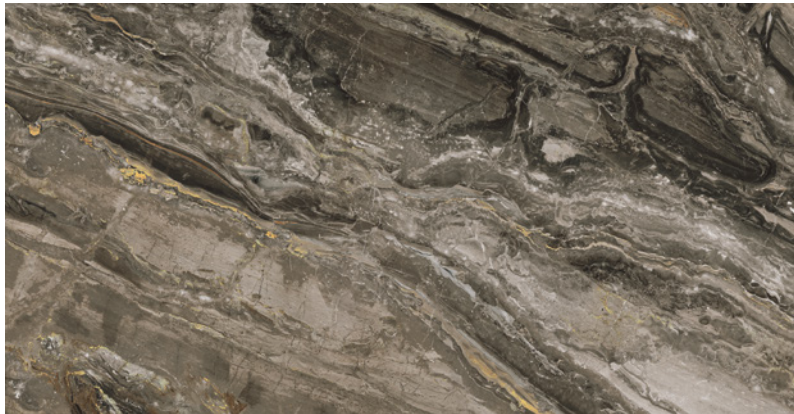


DMAG 83



DMAG 84


Sizes

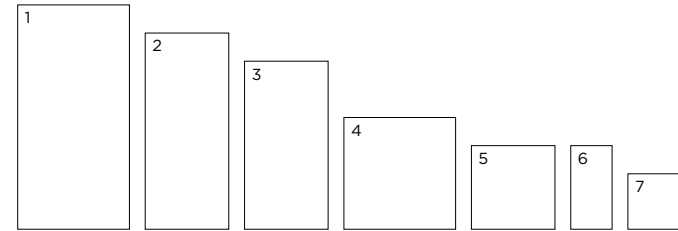


	Size (mm)	Thickness	Finish	Colour Availability
1	3197 x 1597 (R)	6	Natural Glossy	All colours All colours
2	2797 x 1197 (R)	6	Natural Glossy	All colours All colours
3	2397 x 1197 (R)	6	Natural Glossy	All colours All colours
4	1597 x 1597 (R)	6	Natural Glossy	All colours All colours
5	1197 x 1197 (R)	6	Natural Glossy	All colours All colours
6	1197 x 597 (R)	6	Natural Glossy	All colours All colours
7	797 x 797 (R)	6	Natural Glossy	All colours All colours

(R) Rectified size - square edge with bevel.
Swatch colours may vary from original. Samples should be requested.


Mosaic



DMAG 82




DMAG 83




DMAG 84

Muretto Mosaic



DMAG 82



DMAG 83




DMAG 84




Floor: DMAG 84 Glossy

Mosaics & Special Pieces

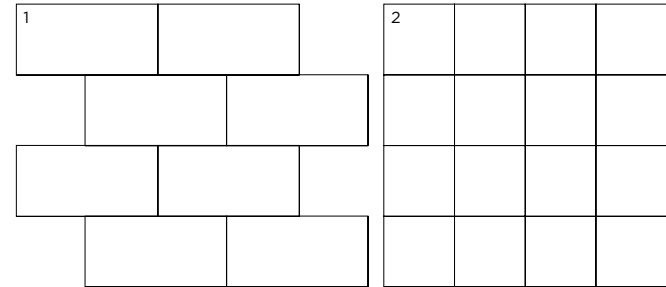

	Size (mm)	Thickness	Finish	Colour Availability
1	Muretto Mosaic 150 x 75 on 297 x 297 sheet	6	Natural Glossy	All colours All colours
2	Mosaic 75 x 75 on 297 x 297 sheet	6	Natural Glossy	All colours All colours
	Plinth Skirting 597 x 46	6	Natural Glossy	All colours All colours

Swatch colours may vary from original. Samples should be requested.



DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Prexious Magnum

Technical Data

Product Type: Glazed Porcelain (BS EN 14411 – Group BIa)

Use: Floors & Walls

Product Code: DMAG

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	± 0.15%
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	± 5%
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	± 0.1%
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	± 0.2%
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	± 0.2%
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Slip resistance	BS 7976-2	Test results upon request
Coefficient of friction	BS EN 16165	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0.08% (Average value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	52 N/mm ² (Average value)
Breaking strength	BS EN ISO 10545-4	≥ 700 N	1350 N (Average value)
Resistance to surface abrasion (glazed tiles)	BS EN ISO 10545-7	PEI *see classifications below	Class 2 - DMAG 82 & 84 and DMAG 83 Glossy Class 3 - DMAG 83 Natural
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible defects	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA - Natural GLB - Glossy
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Class 4-5 - Natural Class 3-4 - Glossy
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	A1 _{FL} /A1
Recycled content			DMAG 82, 83 & 84 - 20.5%

*PEI classifications
 PEI 2 - Light traffic
 PEI 3 - Light to moderate traffic
 PEI 4 - Moderate to heavy traffic
 PEI 5 - Heavy to extra heavy traffic



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. October 2023

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com