

Bera & Beren Slim


Lightweight Slabs / Porcelain Stone



Floor: DLBFS 04 Natural

8 Colours / 3 Finishes / 1 Size

Bera & Beren Slim slabs take inspiration from Portuguese and Catalan limestone. The range has a refined, minimal character in a timeless stone coloured palette. The natural tones demonstrate a subtle shade variation with meticulous surface detail.

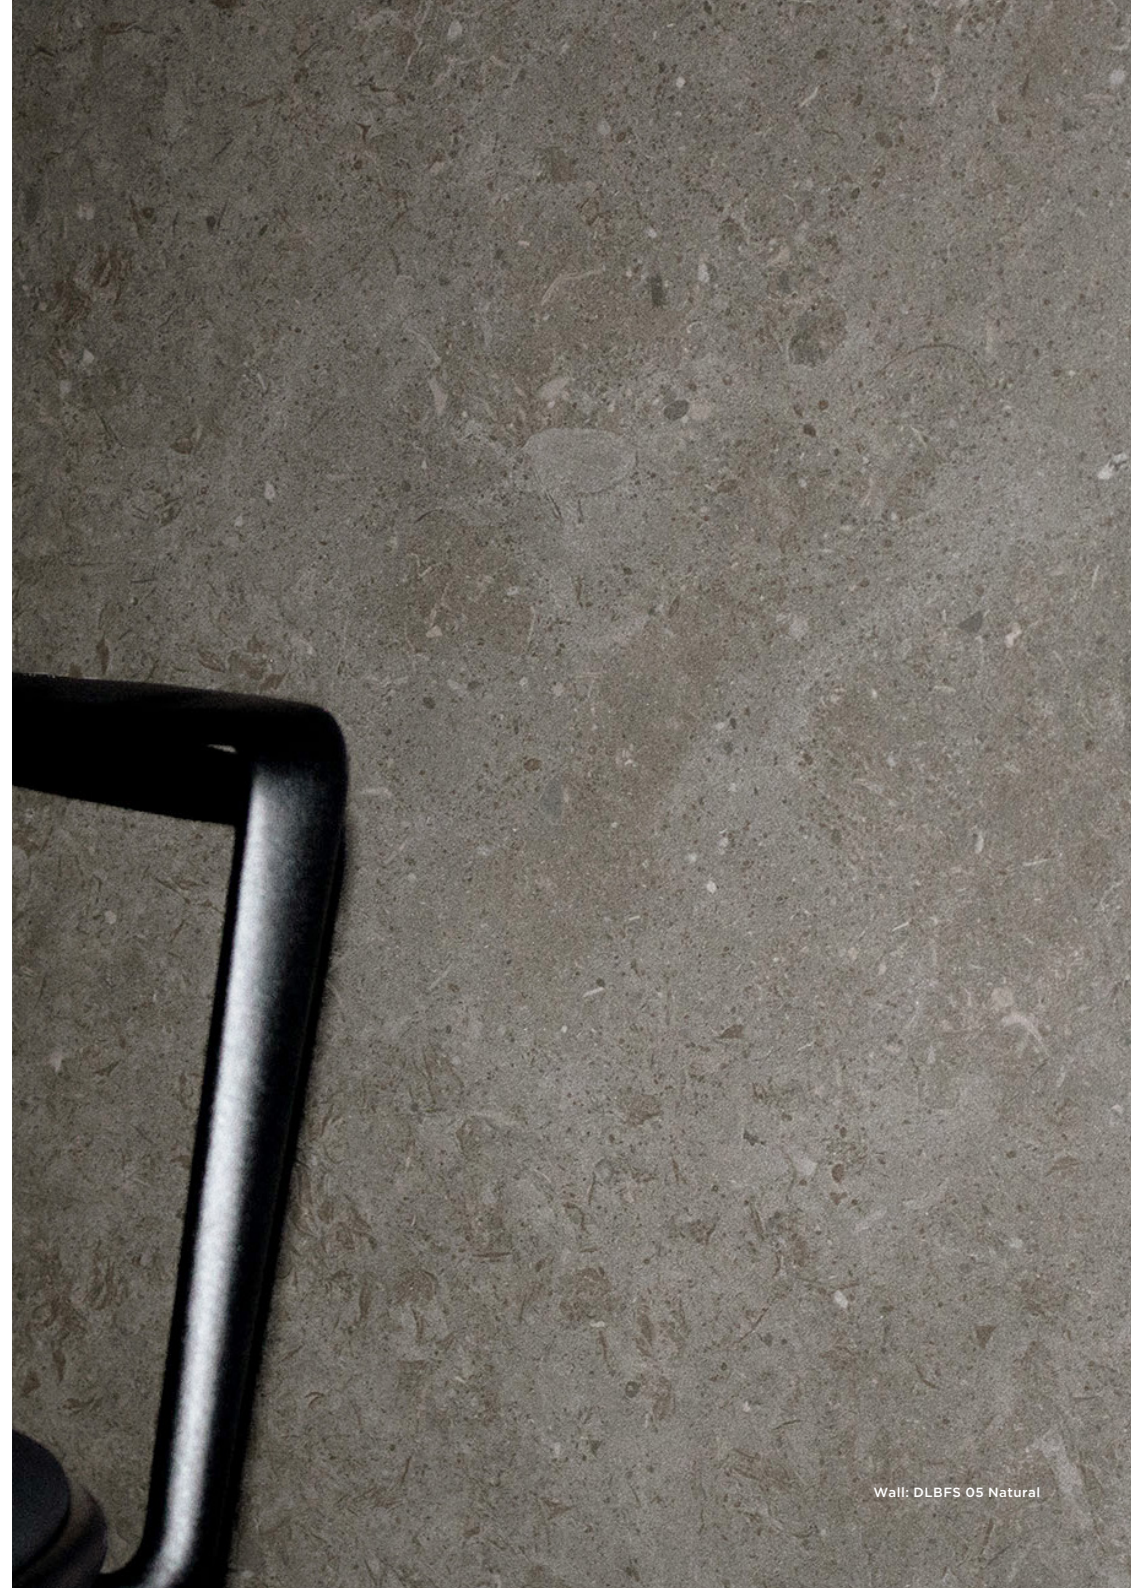

Wall: DLBFS 05 Natural

Sizes



DLBFS 08




DLBFS 02




DLBFS 09




DLBFS 03

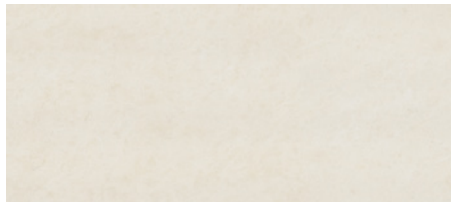


DLBFS 01

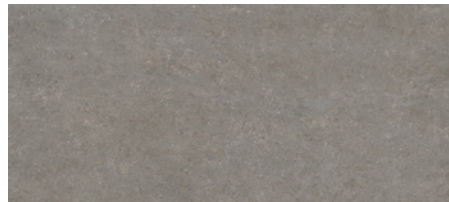


DLBFS 05

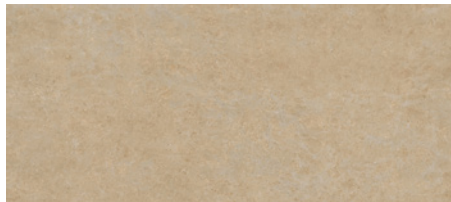

DLBFS 04

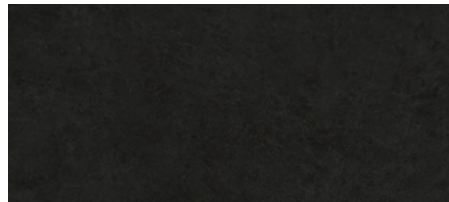

DLBFS 07



	Size (mm)	Thickness	Finish	Colour Availability
1	2698 x 1198 (R)	6	Honed Soft Natural	All colours All colours All colours

(R) Rectified size – squared edge with bevel.
Swatch colours may vary from original. Samples should be requested.

V2 - Moderate Shade Variation



DLBFS 01



DLBFS 02



DLBFS 04



DLBFS 03



DLBFS 05



DLBFS 05



DLBFS 07

2698mm

1198mm

Bera & Beren Slim

Technical Data

Product Type: Glazed Porcelain (BS EN 14411 – Group Bla)

Use: Floors & Walls

Product Code: DLBFS

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R9 from 3° to 10°	Natural
Areas with bare feet	DIN 51097	A over 12° to 18°	Natural
Slip resistance Coefficient of friction	BS 7976-2 BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	< 0.5% (typical value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	> 50 N/mm ² (typical value)
Breaking strength	BS EN ISO 10545-4	< 7.5mm ≥ 700 N	> 1000 N (typical value)
Resistance to deep abrasion	BS EN ISO 10545-6	≤ 175 mm ³	< 139 mm ³ (typical value)
Cracking resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3 – glazed	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	
Recycled content			30%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. Dec. 2020

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com