

Reves Magnum

Lightweight Slabs / Porcelain Marble



Wall: DMAG 193 Glossy

6 Colours / 2 Finishes / 5 Sizes / 2 Mosaics

Inspired by the ancient and refined beauty of alabaster, Reves Magnum transforms the dream of contemporary elegance into reality through delicate nuances and precious colours that are perfectly in step with the most current luxury living trends. Refer to Reves for 9mm-thick tile options.



DMAG 194 Matt



Wall: DMAG 192 Glossy



Wall: DMAG 194 Glossy
Floor: DMAG 194 Matt




DMAG 192




DMAG 193




DMAG 194

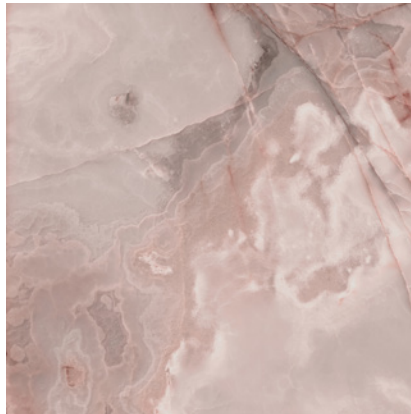

DMAG 209

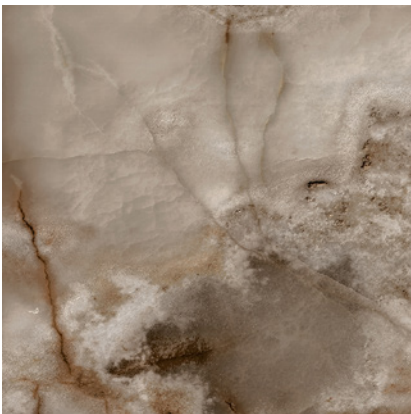


DMAG 195

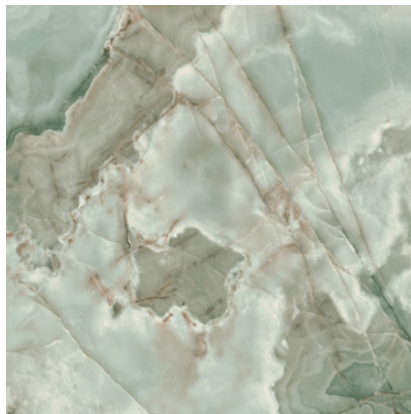


DMAG 208

Sizes

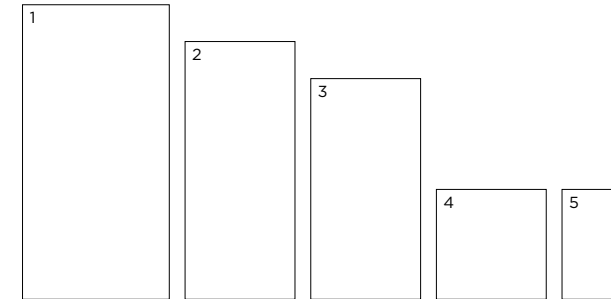

	Size (mm)	Thickness	Finish	Colour Availability
1	3197 x 1597 (R)	6	Matt Glossy	All colours All colours
2	2797 x 1197 (R)	6	Matt Glossy	All colours All colours
3	2397 x 1197 (R)	6	Matt Glossy	All colours All colours
4	1197 x 1197 (R)	6	Matt Glossy	All colours All colours
5	1197 x 597 (R)	6	Matt Glossy	All colours All colours

(R) Rectified size - square edge with bevel. Mosaics shown on next page.
Swatch colours may vary from original. Samples should be requested.



Mosaic



DMAG 192

DMAG 193

DMAG 194

DMAG 195

Muretto Mosaic



DMAG 192

DMAG 193


DMAG 194

DMAG 195




Wall: DMAG 192 Glossy
Floor: DMAG 192 Matt

Mosaics & Special Pieces

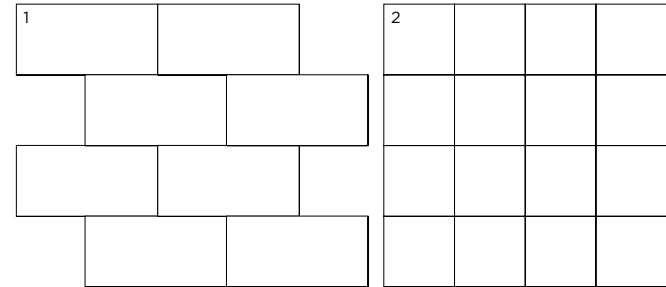


	Size (mm)	Thickness	Finish	Colour Availability
1	Muretto Mosaic 147 x 72 on 297 x 297 sheet	6	Matt Glossy	DMAG 192, 193, 194 & 195 DMAG 192, 193, 194 & 195
2	Mosaic 72 x 72 on 297 x 297 sheet	6	Matt Glossy	DMAG 192, 193, 194 & 195 DMAG 192, 193, 194 & 195
	Plinth Skirting 597 x 46	6	Matt Glossy	DMAG 192, 193, 194 & 195 DMAG 192, 193, 194 & 195

Swatch colours may vary from original. Samples should be requested.




DOMUS


Variations

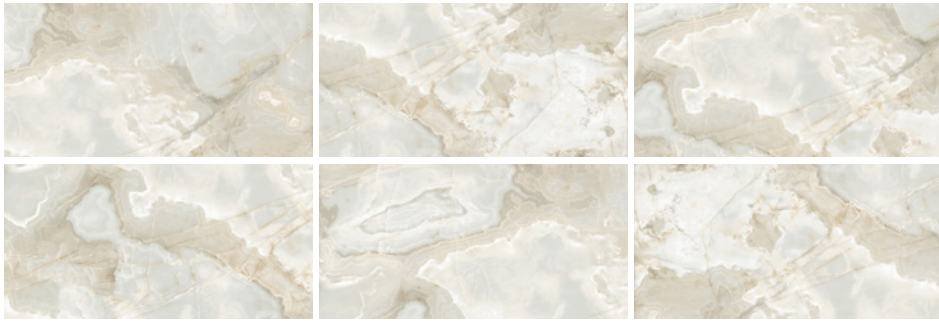

DMAG 192 Matt

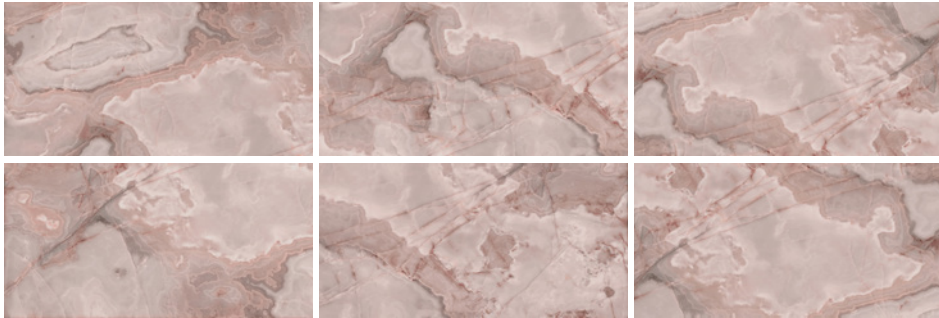

DMAG 209 Glossy

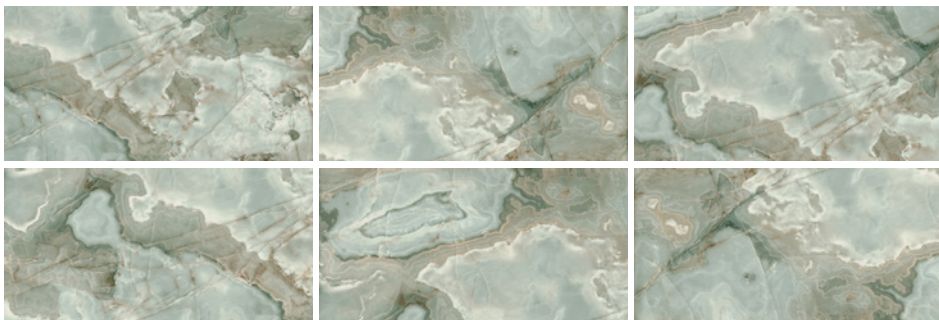

DMAG 208 Matt



DMAG 192 Glossy



DMAG 193 Matt



DMAG 194 Glossy



DMAG 195 Matt

Reves Magnum

Technical Data

Product Type: Glazed Porcelain (BS EN 14411 – Group Bla)

Use: Floors & Walls

Product Code: DMAG

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement
Slip resistance	BS 7976-2	Test results upon request
Coefficient of friction	BS EN 16165	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0.08% (average value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	52 N/mm ² (average value)
Breaking strength	BS EN ISO 10545-4	≥ 700 N	1350 N (average value)
Resistance to surface abrasion (glazed tiles)	BS EN ISO 10545-7	PEI *see classifications below	Class 4 – DMAG 192, 193 & 194 (Matt & Glossy) Class 3 – DMAG 195 Matt, DMAG 208 & 209 (Matt & Glossy) Class 2 – DMAG 195 Glossy
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA - Matt GLB - Glossy
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Class 4 – Glossy Class 5 – Matt
Reaction to fire	Based on the decision 96/603/CE and its changes	A1 _{FL} /A1	A1 _{FL} /A1
Recycled content			DMAG 192, 193 & 209 - 0% DMAG 194, 195 & 208 - 20.5%

***PEI classifications**
 PEI 1 - Very light traffic
 PEI 2 - Light traffic
 PEI 3 - Light to moderate traffic
 PEI 4 - Moderate to heavy traffic
 PEI 5 - Heavy to extra heavy traffic



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. March 2023

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com