Reves Magnum

Lightweight Slabs / Porcelain Marble

Wall: DMAG 193 Gloss

6 Colours / **2** Finishes / **5** Sizes / **2** Mosaics

Inspired by the ancient and refined beauty of alabaster, Reves Magnum transforms the dream of contemporary elegance into reality through delicate nuances and precious colours that are perfectly in step with the most current luxury living trends. Refer to Reves for 9mm-thick tile options.

DMAG 194 Matt

Wall: DMAG 192 Gloss

Wall: DMAG 194 Gloss
Floor: DMAG 194 Matt

DMAG 192

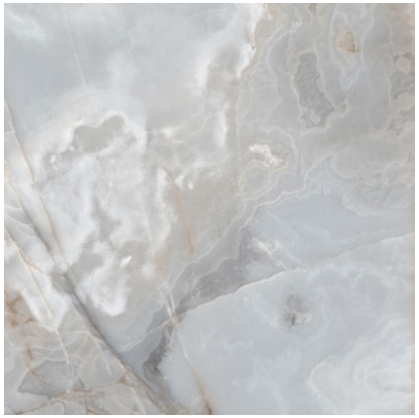

DMAG 193

DMAG 194

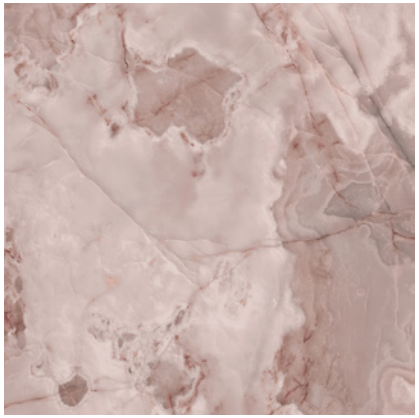

DMAG 209

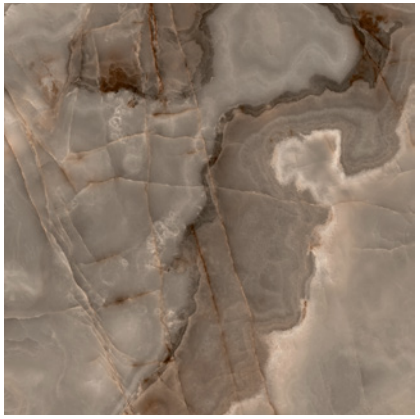

DMAG 195

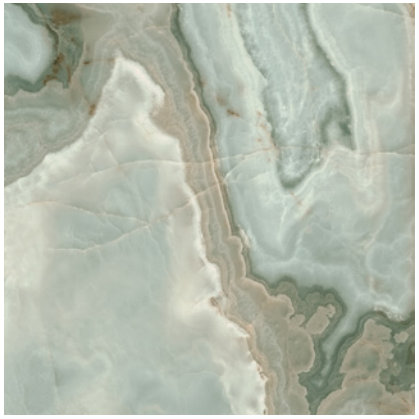

DMAG 208

Sizes

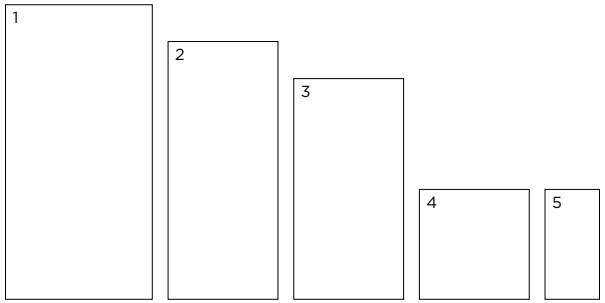

	Size (mm)	Thickness	Finish	Colour Availability
1	3197 x 1597 (R)	6	Matt	All colours
			Gloss	All colours
2	2797 x 1197 (R)	6	Matt	All colours
			Gloss	All colours
3	2397 x 1197 (R)	6	Matt	All colours
			Gloss	All colours
4	1197 x 1197 (R)	6	Matt	All colours
			Gloss	All colours
5	1197 x 597 (R)	6	Matt	All colours
			Gloss	All colours

(R) Rectified size – square edge with bevel. Mosaics shown on next page.
Swatch colours may vary from original. Samples should be requested.

V4 – Random
Shade Variation

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Mosaic

DMAG 192

DMAG 193

DMAG 194

DMAG 195

Muretto Mosaic

DMAG 192

DMAG 193

DMAG 194



DMAG 195

Wall: DMAG 192 Gloss
Floor: DMAG 192 Matt

Mosaics & Special Pieces

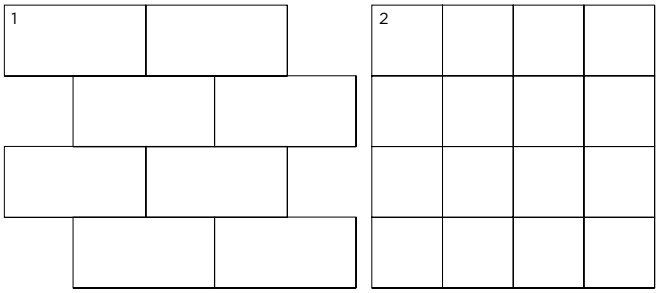

	Size (mm)	Thickness	Finish	Colour Availability
1	Muretto Mosaic 147 x 72 on 297 x 297 sheet	6	Matt Gloss	DMAG 192, 193, 194 & 195 DMAG 192, 193, 194 & 195
2	Mosaic 72 x 72 on 297 x 297 sheet	6	Matt Gloss	DMAG 192, 193, 194 & 195 DMAG 192, 193, 194 & 195
	Plinth Skirting 597 x 46	6	Matt Gloss	All colours All colours

Swatch colours may vary from original. Samples should be requested.

V4 – Random
Shade Variation

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

V4 – Random Shade Variation

DMAG 192 Matt

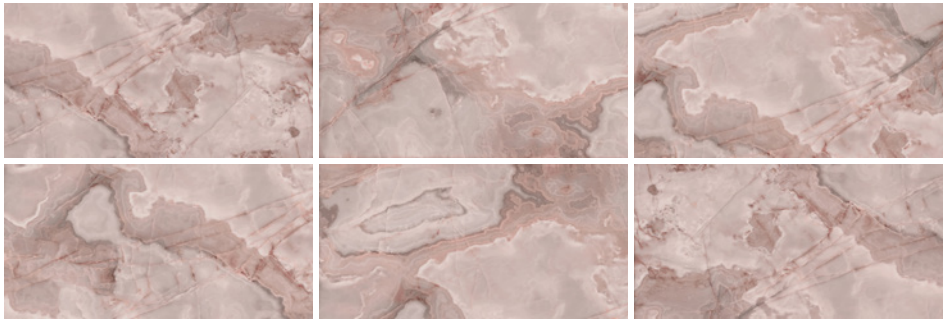

DMAG 209 Gloss

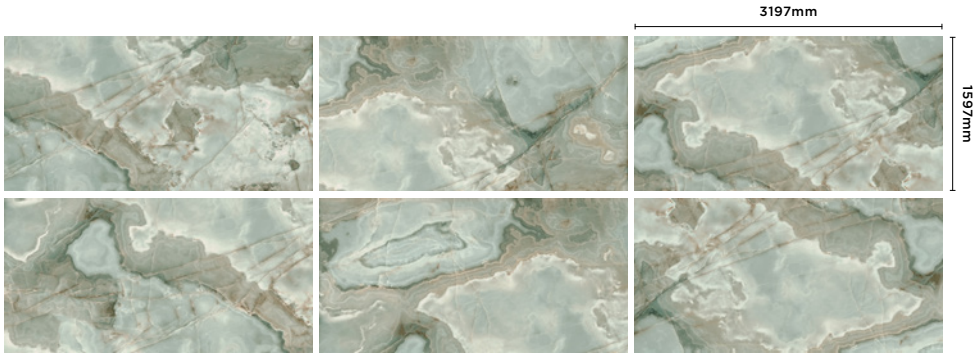

DMAG 208 Matt

DMAG 192 Gloss

DMAG 193 Matt

DMAG 194 Gloss

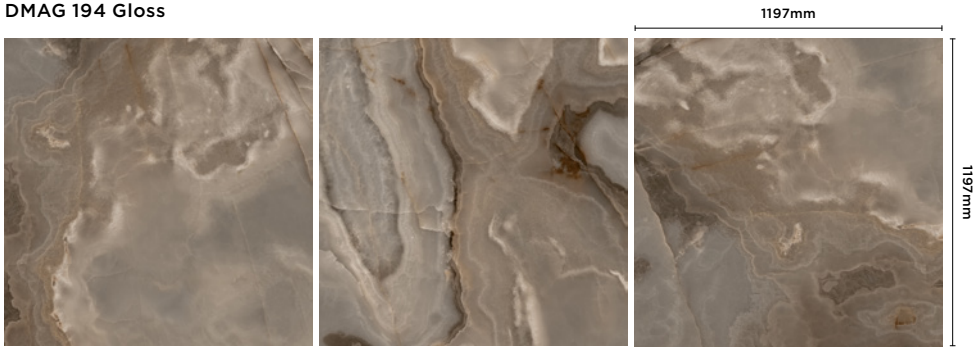

DMAG 195 Matt

Reves Magnum

Technical Data

Product Type: Glazed Porcelain (BS EN 14411 – Group BIa)

Use: Floors & Walls

Product Code: DMAG

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	
Slip resistance Coefficient of friction	BS 7976-2 BS EN 16165	Test results upon request

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0.08% (average value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm^2	52 N/mm^2 (average value)
Breaking strength	BS EN ISO 10545-4	≥ 700 N	1350 N (average value)
Resistance to surface abrasion (glazed tiles)	BS EN ISO 10545-7	PEI *see classifications below	**Class 4** – DMAG 192, 193 & 194 (Matt & Glossy) **Class 3** - DMAG 195 Matt, DMAG 208 & 209 (Matt & Glossy) **Class 2** – DMAG 195 Glossy
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA - Matt GLB – Glossy
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Class 4 – Glossy Class 5 – Matt
Reaction to fire	Based on the decision 96/603/CE and its changes	$A1_{FL}$/A1	$A1_{FL}$/A1
Recycled content			DMAG 192, 193 & 209 - 0% DMAG 194, 195 & 208 – 20.5%

*PEI classifications
PEI 1 – Very light traffic
PEI 2 - Light traffic
PEI 3 - Light to moderate traffic
PEI 4 - Moderate to heavy traffic
PEI 5 - Heavy to extra heavy traffic

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale.

March 2023

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com