

Light Stone Wall

Ceramic Design



4 Colours / 1 Finish / 2 Sizes / 2 Décors

Light Stone Wall is a ceramic wall tile range inspired by the beautiful Testa limestones mined from the ancient quarries of Asia Minor. Its complementing décors feature lines of carved stone relief that will transform any space into a stunning interior. Refer to Light Stone for coordinating porcelain tiles.





Wall: DALSW 02 Matt



Wall: DALSW 03 Relief Décor Matt

Sizes



DALSW 01



DALSW 01 Relief Décor




DALSW 02



DALSW 02 Relief Décor



DALSW 03

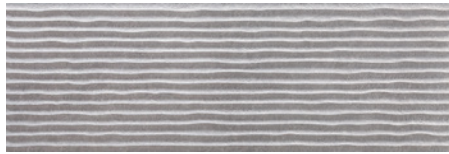


DALSW 03 Relief Décor



DALSW 04




DALSW 04 Relief Décor

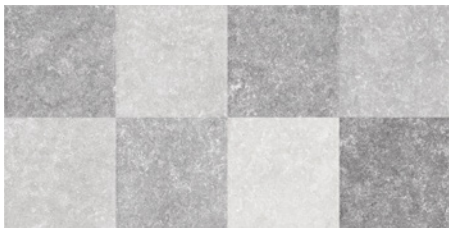

DALSW 05 Mosaic Décor



DALSW 06 Mosaic Décor

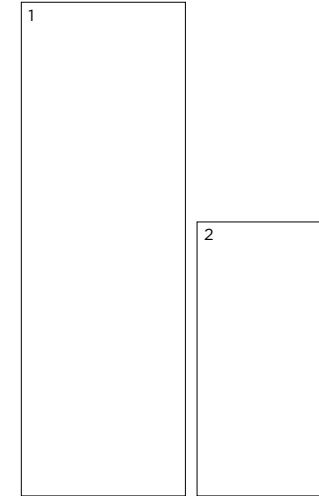

	Size (mm)	Thickness	Finish	Colour Availability
1	900 x 300 (R)	8.7	Matt	DALSW 01, 02, 03 & 04
	Relief Décor 900 x 300 (R)	10.8	Matt	DALSW 01, 02, 03 & 04
2	500 x 250 (N)	7.2	Matt	DALSW 01, 02, 03 & 04
	Mosaic Décor 500 x 250 (N)	7.2	Matt	DALSW 05 & 06

(R) Rectified size – square edge with bevel. (N) Nominal size – pressed edge.
Swatch colours may vary from original. Samples should be requested. For wall use only.

Light Stone Wall

Technical Data

Product Type: Glazed Ceramic (BS EN 14411 – Group BIII)

Use: Walls (Internal only)

Product Code: DALSW

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	± 0.50%
Thickness	BS EN ISO 10545-2	± 10% (max. ± 0.5mm)	± 5%
Edge straightness	BS EN ISO 10545-2	± 0.30% (max. ± 1.5mm)	± 0.30%
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	± 0.50%
Planarity (flatness): Centre curvature	BS EN ISO 10545-2	+ 0.5% (max. + 2.0mm) - 0.3% (max. - 1.5mm)	+ 0.5% - 0.3%
Edge curvature	BS EN ISO 10545-2	+ 0.5% (max. + 2.0mm) - 0.3% (max. - 1.5mm)	+ 0.5% - 0.3%
Warpage	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	± 0.50%
Appearance	BS EN ISO 10545-2	> 95%	Conforms

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	> 10%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 12 N/mm ²	Conforms
Breaking strength	BS EN ISO 10545-4	≥ 600 N	Conforms
Linear thermal expansion coefficient	BS EN ISO 10545-8	Declared value	≤ 9 × 10 ⁻⁶ / °C (Typical value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible defects	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLB
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GB
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Class 3
Reaction to fire	Based on the decision 96/603/EC and its changes	A1	A1
Recycled content			29%

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. July 2019



DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com