

Amazonia

Ceramic Colours



Wall: DEAM 09 Gloss

9 Colours / 1 Finish / 2 Sizes


Amazonia displays multi-tonal shade variations with metallic effects, offering a contemporary and vibrant look. Each colour in the range has 20 variations—this, combined with the glossy, irregular finish, instantly adds liveliness and energy to the space.



Wall: DEAM 07 Gloss




Wall: DEAM 06 Gloss

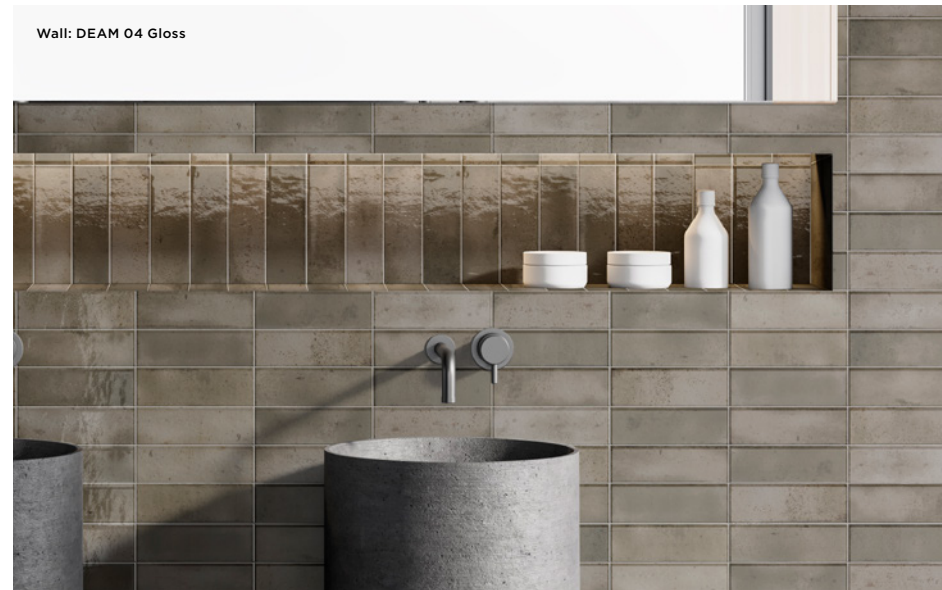

Wall: DEAM 04 Gloss



Wall: DEAM 01 Gloss

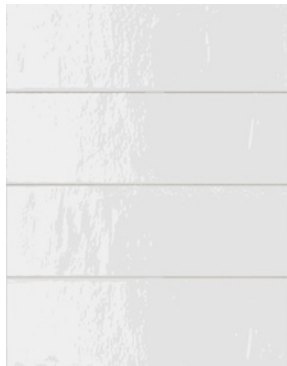

DEAM 01



DEAM 02



DEAM 03



DEAM 04



DEAM 05




DEAM 06



DEAM 07




DEAM 08

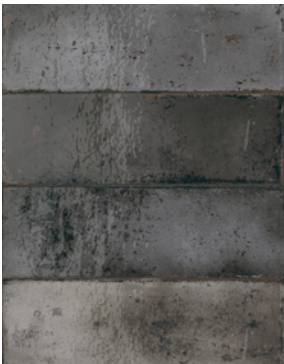

DEAM 09

Sizes

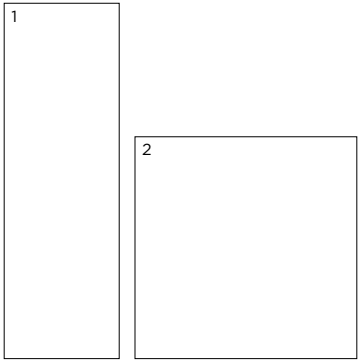

	Size (mm)	Thickness	Finish	Colour Availability
1	200 x 65 (N)	8	Gloss	All colours
2	125 x 125 (N)	8	Gloss	All colours

(N) Nominal size – pressed edge. Swatch colours may vary from original. Samples should be requested. A box contains 48 pieces, which is made up of a random selection of 20 different surface patterns (4 of which are shown here). Patterns cannot be picked.

Amazonia

Technical Data

Product Type: Glazed Ceramic (BS EN 14411 – Group BIII)

Use: Walls (Internal only)

Product Code: DEAM

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement (for nominal size <i>N</i>)		Actual Value
		70mm ≤N<150mm	N ≥ 150mm	
Length & width	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 0.5mm	± 10% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.5mm	± 0.30% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness): Centre curvature	BS EN ISO 10545-2	+ 0.75mm -0.5mm	+ 0.5% (max. + 2.0mm) - 0.3% (max. - 1.5mm)	Conforms
Edge curvature	BS EN ISO 10545-2	+ 0.75mm -0.5mm	+ 0.5% (max. + 2.0mm) - 0.3% (max. - 1.5mm)	Conforms
Warpage	BS EN ISO 10545-2	± 0.75mm	± 0.5% (max. ± 2.0mm)	Conforms

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	> 10%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 7.5mm thick ≥ 12 N/mm ²	Conforms
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible defects	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1	A1
Recycled content			61%

