

Pigmento 15mm

Technical Stone



4 Colours / 2 Finishes / 5 Sizes / 1 Mosaic

Pigmento 15mm is an eco-friendly interior tile range that encloses mimesis with floral nature—an immersive experience in positivity, hope, optimism, kindness, tranquillity and delicacy. This range is easy to clean and can be combined with the modular sizes of Cromie 15mm and Pietre 15mm.





DSRG 01 Compact



DSRG 01 Consolare



DSRG 03 Compact



DSRG 03 Consolare



DSRG 02 Compact



DSRG 02 Consolare




DSRG 04 Compact




DSRG 04 Consolare

Sizes

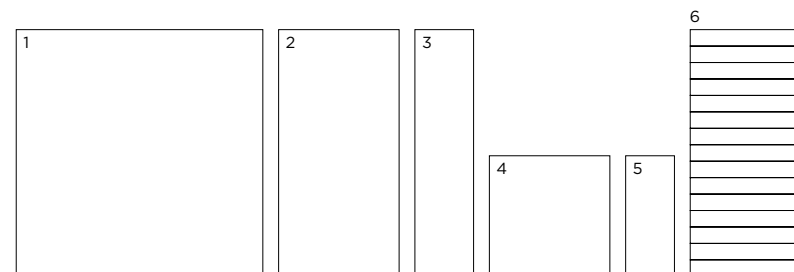

	Size (mm)	Thickness	Finish	Colour Availability
1	250 x 250 (N)	15	Compact Consolare	All colours All colours
2	250 x 122.5 (N)	15	Compact Consolare	All colours All colours
3	250 x 60 (N)	15	Compact Consolare	All colours All colours
4	122.5 x 122.5 (N)	15	Compact Consolare	All colours All colours
5	122.5 x 60 (N)	15	Compact Consolare	All colours All colours
6	Gessetti Mosaic 122.5 x 14 (N) on 250 x 122.5 sheet	15	Compact Consolare	All colours All colours

(N) Nominal size - pressed edge. Swatch colours may vary from original. Samples should be requested. This is a sealed product suitable for indoor use only.




DOMUS




Zdora XL
Cromie 15mm DRSC 01 Compact, DRSC 06 Compact & DRSC 12 Compact
Pigmento 15mm DSRG 01 Compact

Custom Designs

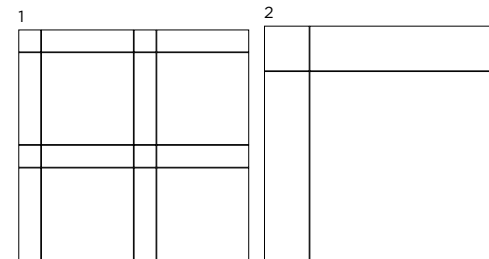

	Size (mm)	Thickness	Finish	Colour Availability
1	Zdora 122.5 x 122.5 (N) 122.5 x 30 (N) 30 x 30 (N) on 309 x 309 sheet	15	Compact	All colours
2	Zdora XL 250 x 250 (N) 250 x 60 (N) 60 x 60 (N) on 311 x 311 sheet	15	Compact	All colours

(N) Nominal size – pressed edge. Swatch colours may vary from original. Samples should be requested. This is a sealed product suitable for indoor use only. Zdora and Zdora XL custom designs can be produced upon request using any colours of Cromie 15mm and Pigmento 15mm.



Pigmento 15mm

Technical Data

Product Type: Reconstituted Stone (sealed)*

Use: Internal & External Walls & Floors

Product Code: DSRG

Finishes: Compact – smooth surface, even edges

Consolare – aged surface, aged edges

DIMENSION & SURFACE QUALITY

THIS IS AN ARTISANAL, HANDMADE / HAND-FINISHED PRODUCT
IRREGULAR EDGES, VARIATION IN TONE, THICKNESS, SIZE / PLANARITY
(FLATNESS) ARE CHARACTERISTICS OF THIS MATERIAL
DIMENSIONS CAN VARY BY ±1 mm FROM THE NOMINAL SIZE.

* This material requires sealing pre and post grouting
(refer to Fixing Recommendations document)

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R12 from 27° to 35°	Compact & Consolare
Slip resistance Coefficient of friction	BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Impact strength	RD n 2234	Kgm	0.34 (typical value)
Resistance to abrasion	EN 202	mm²	705
Flexural strength	UN EN 100	Kg/cm²	Side 12.5 = 119 kg/cm² Side 25 = 88 kg/cm²
Resistance to frost	UNI EN 202	Declared Value	Resistant
Compressive strength	UNI EN 202	Kg/m²	744 - 1282
Resistance to salt			Resistant
Reaction to fire	Based on the decision 96/603/EC and its changes		A1 _{FL} /A1
Recycled content			60%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale.
September 2024