

Industrial 20mm

External 20mm / Porcelain Concrete



Floor: DXF FTE 02 Bush Hammered

6 Colours / 1 Finish / 1 Size

A new interpretation of cement that provides spaces with an industrial accent. Industrial 20mm demonstrates exceptional durability while being frost-proof and easy to maintain. Refer to Industrial and Industrial Magnum to provide a seamless transition between indoors and outdoors.



Floor: DXF FTE 02 Bush Hammered



DXF FTE 01




DXF FTE 02



DXF FTE 03



DXF FTE 04

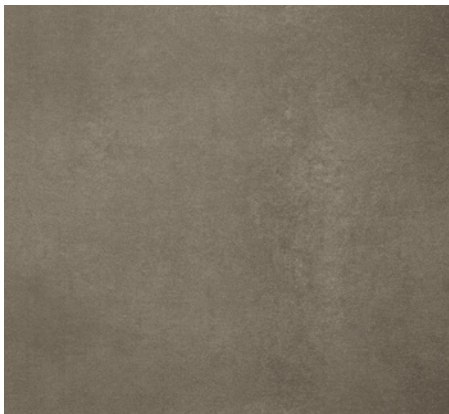


DXF FTE 05




DXF FTE 06

Sizes



	Size (mm)	Thickness	Finish	Colour Availability
1	597 x 597 (R)	20	Bush Hammered Grip	All colours

(R) Rectified size - square edge with bevel. Swatch colours may vary from original. Samples should be requested.



Industrial 20mm

Technical Data

Product Type: Unglazed Porcelain (BS EN 14411 – Group Bla)

Use: Floors

Product Code: DXF FTE

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	± 0.15%
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	± 0.1%
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	± 0.2%
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	± 0.35%
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R11 from 19° to 27°	Bush Hammered Grip
Areas with bare feet	DIN 51097	C over 24°	Bush-Hammered Grip
Slip resistance Coefficient of friction	BS 7976-2 BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0.08% (Average value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	52 N/mm ² (Average value)
Breaking strength	BS EN ISO 10545-4	≥ 1300 N	14000 N (Average value)
Resistance to deep abrasion (unglazed tiles)	BS EN ISO 10545-6	≤ 175 mm ³	140 mm ³ (Average value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	ULA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	UHA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB min.	UA
Stain resistance	BS EN ISO 10545-14	Declared value	Class 3 - 4
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	A1 _{FL} /A1
Recycled content			DXF FTE 01, 02, 05 & 06 – 20.5% DXF FTE 03 & 04 – 61.9%

Important Note: For installations using pedestals that incorporate a void of 75mm or greater, please contact us for advice regarding the recommended provision of a reinforcing mesh for safety.



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. March 2023

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com