

Robur 180

Engineered Wood



Floor: WDRO 004 Extra Matt UV Lacquer, Lively Grade

6 Colours / 1 Finish / 2 Sizes

PEFC-certified 13.5mm-thick European oak engineered in a 180/173mm-wide plank format, forested and produced to exacting and responsible standards. Refer to Robur Fundamental 180 and Robur 240 for alternative plank formats and Robur Parquet for strip and herringbone formats.



Floor: WDRO 001 Extra Matt UV Lacquer, Select Grade



Floor: WDRO 006 Extra Matt UV Lacquer, Lively Grade



Floor: WDRO 005 Extra Matt UV Lacquer, Select Grade

Select Grade




WDRO 001

Tinted



WDRO 002

Tinted

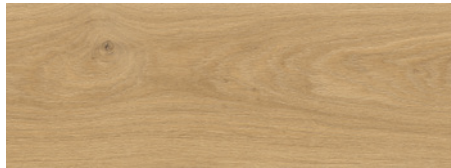


WDRO 004

Tinted



WDRO 005

Natural

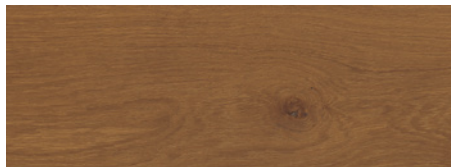

WDRO 006

Smoked



WDRO 007

Tinted

Lively Grade



WDRO 001

Tinted




WDRO 002

Tinted



WDRO 004

Tinted

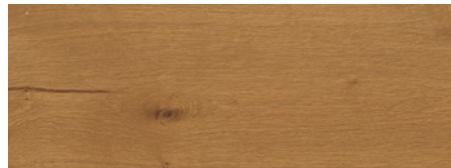

WDRO 005

Natural



WDRO 006

Smoked

Sizes

Engineered Wood

1

2

| | Size (mm) | Thickness (Lamella) | Finish | Colour Availability |
|---|------------|---------------------|-----------------------|-------------------------------|
| 1 | 180 x 2200 | 13.5 (3.5) | Extra Matt UV Lacquer | WDRO 001, 002, 004, 005 & 007 |
| 2 | 173 x 2200 | 13.5 (3.5) | Extra Matt UV Lacquer | WDRO 006 |

Swatch colours may vary from original. Samples should be requested.

Specification

- Material:** Oak top layer. Softwood balancing layer. Engineered spruce base.
- Grades:** Select (all colours)
Lively (WDRO 001, 002, 004, 005 & 006)
- Brushing:** Brushed
- Edge Detail:** 4-way bevel
- Certification:** PEFC
- Application:** Internal use only. Suitable with underfloor heating
- Installation:** 5G fold-down locking joints
Recommended for floated or bonded installation
- Treatments:** Tinted (WDRO 001, 002, 004 & 007)
Natural (WDRO 005)
Smoked (WDRO 006)

DOMUS
WOOD

service@domuswood.com | t: 020 8481 9500 | domuswood.com



Technical Data

Engineered Wood



Floor: WDRO 002 Extra Matt UV Lacquer, Lively Grade

Cleaning & Maintenance Specification: **ETC&M 01**

PERFORMANCE & DURABILITY

| Technical Characteristics | Industry Standard | Performance |
|---------------------------|----------------------------|----------------------------|
| Reaction to Fire | UNI EN 14342 EN 13501-1 | Cfl-S1 |
| Formaldehyde Emission | UNI EN 14342 EN 717-1 | E1 (≤ 0.05 ppm) |
| VOC Emissions | AgBB-Scheme Blue Angel | ≤ 300 ppm |
| Bond Strength | DIN EN 204 | $\geq D3$ |
| Thermal Resistance | UNI EN 14342 | 0.110 m ² k/W |

NB: Compatible with underfloor heating systems - subject to K21 installation advice available on request.

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group Limited cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Limited Terms & Conditions of Sale, 11 February 2026 2:13 pm

DOMUS
WOOD

service@domuswood.com | t: 020 8481 9500 | domuswood.com



Overview Images


Robur 180 (Select Grade)



WDRO 001 Extra Matt UV Lacquer



WDRO 002 Extra Matt UV Lacquer

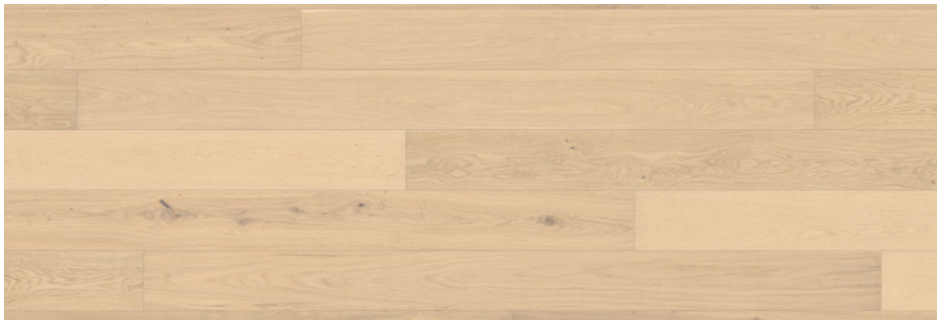


WDRO 004 Extra Matt UV Lacquer



WDRO 005 Extra Matt UV Lacquer



WDRO 006 Extra Matt UV Lacquer

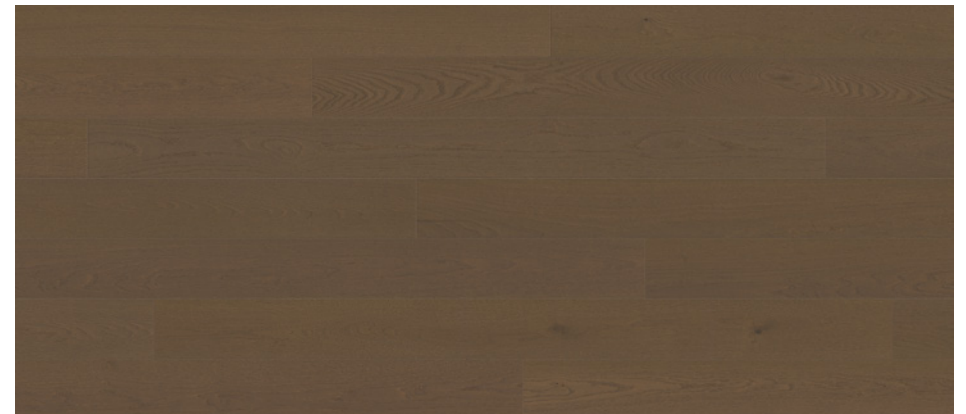

WDRO 007 Extra Matt UV Lacquer

Overview Images

Robur 180 (Lively Grade)



WDRO 001 Extra Matt UV Lacquer




WDRO 002 Extra Matt UV Lacquer



WDRO 004 Extra Matt UV Lacquer



WDRO 005 Extra Matt UV Lacquer

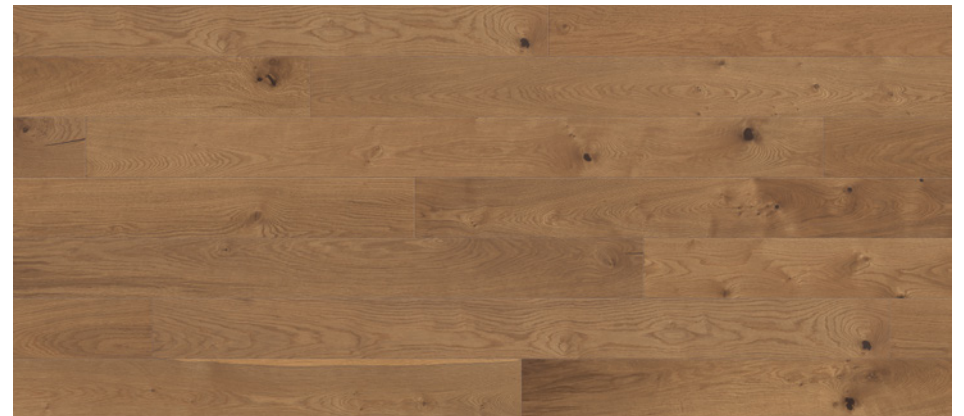

WDRO 006 Extra Matt UV Lacquer