

Pietre 22mm

Technical Stone



Floor: DRSP0 04 Natural & Fiammata

6 Colours / **2** Finishes / **7** Sizes

Pietre 22mm is a range of unsealed compact stones composed of natural raw materials. The uniqueness of the surfaces and high technical performances allow the use of this product both indoors and outdoors. View Pietre 15mm for 15mm-thick options for indoor use.



Floor: DRSP0 02 Natural



DRSP0 04 Natural



Fiammata



DRSP0 05 Natural



Fiammata



DRSP0 06 Natural



Fiammata



DRSP0 03 Natural



Fiammata



DRSP0 01 Natural



Fiammata




DRSP0 02 Natural




Fiammata

Sizes

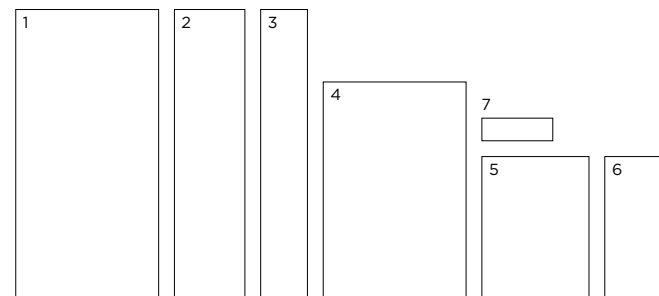

| | Size (mm) | Thickness | Finish | Colour Availability |
|---|---------------|-----------|---------------------|----------------------------|
| 1 | 672 x 333 (N) | 22 | Natural Fiammata | All colours All colours |
| 2 | 672 x 165 (N) | 22 | Natural Fiammata | All colours All colours |
| 3 | 672 x 110 (N) | 22 | Natural Fiammata | All colours All colours |
| 4 | 505 x 333 (N) | 22 | Natural Fiammata | All colours All colours |
| 5 | 333 x 250 (N) | 22 | Natural Fiammata | All colours All colours |
| 6 | 333 x 165 (N) | 22 | Natural Fiammata | All colours All colours |
| 7 | 165 x 54 (N) | 22 | Natural Fiammata | All colours All colours |

(N) Nominal size – pressed edge. Swatch colours may vary from original. Samples should be requested.



Pietre 22mm

Technical Data

Product Type: Reconstituted Stone (unsealed)

Use: Internal & External Floors

Product Code: DRSPO

Finishes: Natural - uniform surface

Fiammata - grooved surface

DIMENSION & SURFACE QUALITY

THIS IS AN ARTISANAL, HANDMADE / HAND-FINISHED PRODUCT
IRREGULAR EDGES, VARIATION IN TONE, THICKNESS, SIZE / PLANARITY
(FLATNESS) ARE CHARACTERISTICS OF THIS MATERIAL
DIMENSIONS CAN VARY BY ± 1 mm FROM THE NOMINAL SIZE.

SLIP RESISTANCE

| Technical Characteristics | Industry Standards | Requirement | Finish |
|--|---|--------------|-----------------|
| Areas with footwear | DIN 51130 | R13 over 35° | Unsealed (22mm) |
| Slip resistance Coefficient of friction | BS 7976-2 / BS EN 16165 Test results upon request | | |

PRODUCT QUALITY & DURABILITY

| Technical Characteristics | Industry Standards | Unit of Measure | Actual Value |
|---------------------------|---|--------------------|---|
| Impact Strength | RD n 2234 | Kg/cm ² | 0.34 (typical value) |
| Resistance to abrasion | EN 202 | mm ² | 705 |
| Flexural strength | UN EN 100 | Kg/cm ² | Side 12.5 = 119 kg/cm ² Side 25 = 88 kg/cm ² |
| Resistance to frost | UNI EN 202 | Declared Value | Resistant |
| Compressive strength | UNI EN 202 | Kg/m ² | 744 - 1282 |
| Resistance to salt | | | Resistant |
| Reaction to fire | Based on the decision 96/603/EC and its changes | | A1 _{FL} /A1 |
| Recycled content | | | 60% |

