

Ego

Porcelain Stone



Wall & Floor: DPEG 02 Natural

4 Colours / 2 Finishes / 5 Sizes / 1 Mosaic / 3 Décors

Inspired by ancient Mexican stone, the Ego range of porcelain tiles features a varied design that enhances its blend of granite and limestone. The range offers many design possibilities, thanks to its four colours, five sizes, and a Trame Décor (in three sizes).



Wall & Floor: DPEG 04 Natural



Floor: DPEG 03 Natural



Wall: DPEG 01 Trame Décor Natural
Floor & Bath Sides: DPEG 01 Natural

Sizes



DPEG 01




DPEG 02



DPEG 03



DPEG 04

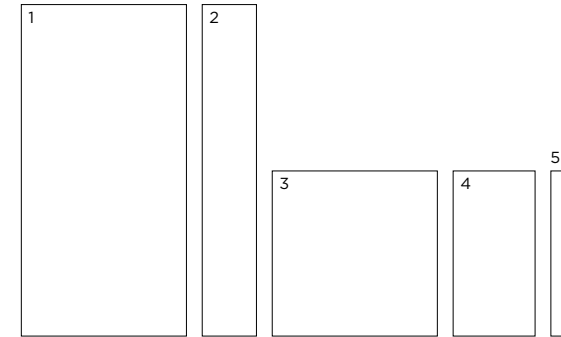

	Size (mm)	Thickness	Finish	Colour Availability
1	1198 x 598 (R)	9.5	Natural Natural Grip	All colours All colours
2	1198 x 198 (R)	9.5	Natural	All colours
3	598 x 598 (R)	9.5	Natural	All colours
4	598 x 298 (R)	9.5	Natural	All colours
5	598 x 63 (R)	9.5	Natural	All colours

(R) Rectified size - squared edge with bevel. Mosaics and décors shown on next page. Swatch colours may vary from original. Samples should be requested.

Mosaics & Décors


Mosaic 48 x 48mm




DPEG 01



DPEG 02



DPEG 03



DPEG 04

Trame Décor 598 x 298 x 9.5mm




DPEG 01



DPEG 02



DPEG 03

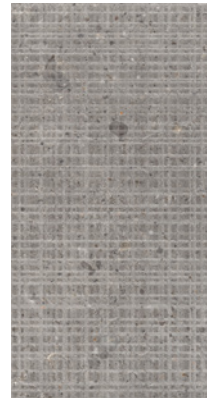


DPEG 04

Trame Décor 1198 x 198 x 9.5mm



DPEG 01




DPEG 02



DPEG 03



DPEG 04

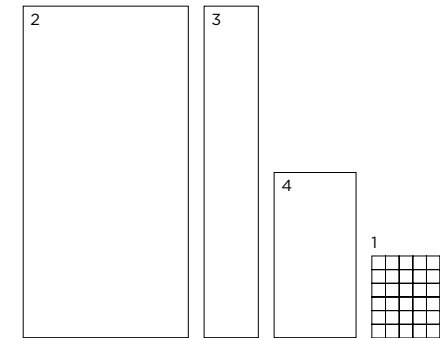

	Size (mm)	Thickness	Finish	Colour Availability
1	Mosaic 48 x 48 (R) on 298 x 298 sheet	9.5	Natural	All colours
2	Trame Décor 1198 x 598 (R)	9.5	Natural	All colours
3	Trame Décor 1198 x 198 (R)	9.5	Natural	All colours
4	Trame Décor 598 x 298 (R)	9.5	Natural	All colours

(R) Rectified size – squared edge with bevel. Special pieces shown on next page. Swatch colours may vary from original. Samples should be requested.




Wall & Floor: DPEG 04 Natural

Special Pieces

	Size (mm)	Thickness	Finish	Colour Availability
1	Metal Listello 1198 x 5	9.5	Natural	Brass & Blue
2	Plinth Skirting 1198 x 46	9.5	Natural	All colours
3	Plinth Skirting 598 x 70	9.5	Natural	All colours
4	Step Tread 1198 x 330 x 32	9.5	Natural	All colours
5	Bullnose Step Tread 1198 x 330 x 32	9.5	Natural	All colours
6	Angle Step Tread DX 1198 x 330 x 32	9.5	Natural	All colours
7	Angle Step Tread SX 1198 x 330 x 32	9.5	Natural	All colours

Swatch colours may vary from original. Samples should be requested.



DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com


V3 - High Shade Variation




DPEG 01 Natural




DPEG 02 Natural

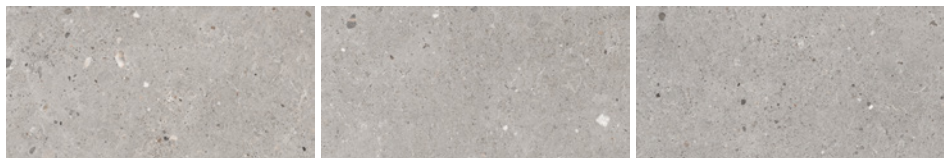


DPEG 03 Natural

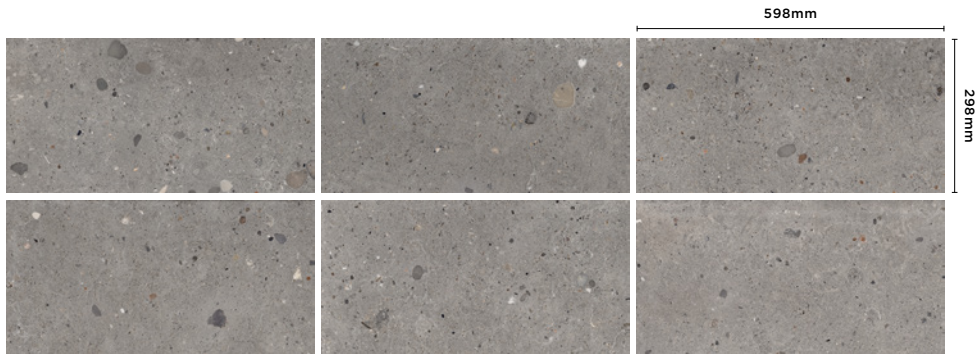

DPEG 04 Natural

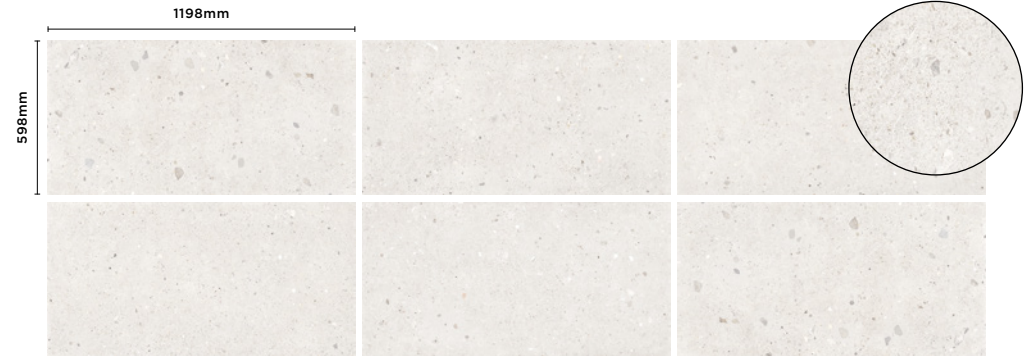

DPEG 01 Natural Grip

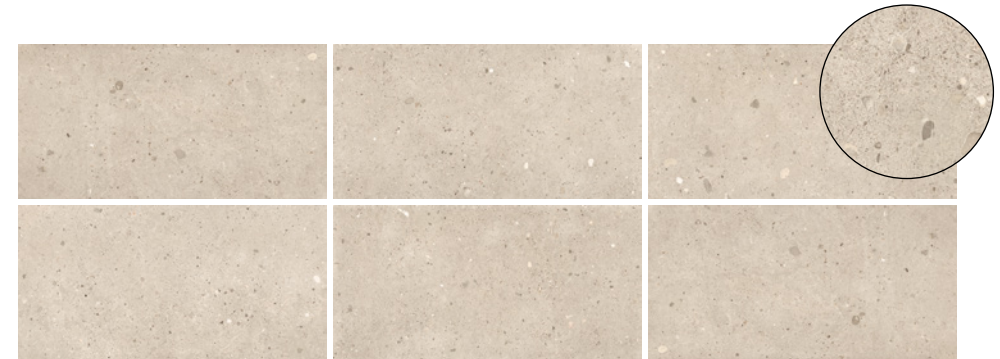

DPEG 02 Natural



DPEG 03 Natural Grip



DPEG 04 Natural

Ego

Technical Data

Product Type: Glazed Porcelain (BS EN 14411 – Group BIa)

Use: Floors & Walls

Product Code: DPEG

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement (for nominal size N)		Actual Value
		70mm ≤ N < 150mm	N ≥ 150mm	
Length & width	BS EN ISO 10545-2	± 0.9mm	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 0.5mm	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%		Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R10 from 10° to 19° R11 from 19° to 27°	Natural Natural Grip
Areas with bare feet	DIN 51097	B over 18° to 24° C over 24°	Natural Natural Grip
Slip resistance (Pendulum) Coefficient of friction	BS EN 16165	Test results upon request	

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale.
April 2026

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	≥ 45 N/mm ² (typical value)
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm ≥ 1300 N	≥ 2000 N (typical value)
Resistance to surface abrasion (glazed tiles)	BS EN ISO 10545-7	PEI *see classifications below	Class 4 – DPEG 03 & 04 Class 5 – DPEG 01 & 02
Linear thermal expansion coefficient	BS EN ISO 10545-8	Declared value	≤ 9x10 ⁻⁶ /°C (Typical value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3 – glazed	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A ₁ FL/A1	A ₁ FL/A1
Recycled content			15%

*PEI classifications

PEI 1 – Very light traffic
PEI 2 – Light traffic
PEI 3 – Light to moderate traffic
PEI 4 – Moderate to heavy traffic
PEI 5 – Heavy to extra heavy traffic



DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com