

Kora

Porcelain Wood



Floor: DLKA 01 Anti-Slip

5 Colours / 2 Finishes / 3 Sizes / 2 Mosaics

Kora draws inspiration from wood, bringing out its most dynamic qualities. Intense knots and slightly marked veins become more special thanks to 3D.FIT technology—a technique for achieving ultra-realistic relief. Kora can be used indoors and outdoors to create visual continuity between the two areas.



Floor: DLKA 03 Soft Textured



Floor: DLKA 01 Soft Textured



Floor: DLKA 02 Anti-Slip

Sizes



DLKA 01



DLKA 02




DLKA 03



DLKA 04



DLKA 05

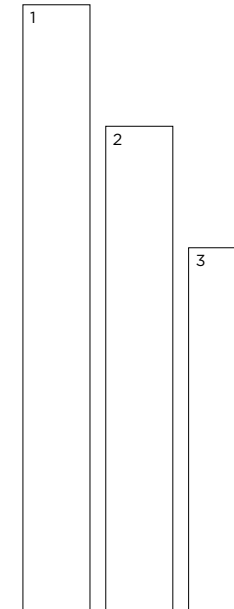


	Size (mm)	Thickness	Finish	Colour Availability
1	1998 x 223 (R)	9	Soft Textured	All colours
2	1598 x 223 (R)	9	Soft Textured	All colours
3	1198 x 198 (R)	9	Soft Textured Anti-Slip	All colours All colours

(R) Rectified size – squared edge with bevel. Mosaics shown on next page.
Swatch colours may vary from original. Samples should be requested.

Mosaics

Mosaic 298 x 30mm



DLKA 01



DLKA 02



DLKA 03



DLKA 04



DLKA 05

Mosaic 898 x 50mm



DLKA 01



DLKA 02



DLKA 03



DLKA 04



DLKA 05

1		2	

	Size (mm)	Thickness	Finish	Colour Availability
1	Mosaic 298 x 30 on 298 x 298 sheet	9	Soft Textured	All colours
2	Mosaic 898 x 50 on 898 x 298 sheet	9	Soft Textured	All colours

Swatch colours may vary from original. Samples should be requested.

Kora

Technical Data

Product Type: Glazed Porcelain (BS EN 14411 – Group BIa)

Use: Floors & Walls

Product Code: DLKA

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R10 from 10° to 19° R11 from 19° to 27°	Soft Textured Anti-Slip
Areas with bare feet	DIN 51097	B over 18° to 24° C over 24°	Soft Textured Anti-Slip
Slip resistance (Pendulum) Coefficient of friction	BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	≤ 0.5% (Typical value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	> 52 N/mm ² (Typical value)
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm ≥ 1300 N	> 2500 N (Typical value)
Resistance to surface abrasion (glazed tiles)	BS EN ISO 10545-7	PEI *see classifications below	Class 3
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3 – glazed	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	A1 _{FL} /A1
Recycled content			30%

*PEI classifications
PEI 1 – Very light traffic
PEI 2 – Light traffic
PEI 3 – Light to moderate traffic
PEI 4 – Moderate to heavy traffic
PEI 5 – Heavy to extra heavy traffic



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. May 2024