

# Sensi

*Porcelain Stone*



Kitchen Units: DCSND 05 Dust Natural

**5** Colours / **2** Finishes / **4** Textures / **3** Sizes

In a neutral palette of mineral tones with surface textures inspired by earth, sand & stone, Sensi takes its cues from nature to introduce a sense of character to interior & exterior spaces. Made from 20.5% recycled materials mixed with natural raw materials through a sustainable production process.



Floor: DCSNS 04 Sand Natural





Floor: DCSNF 02 Fossil Natural Grip  
Shower Ceiling, Wall & Floor: DCSNF 01 Fossil Natural Grip



Floor: DCSNL 01 Lithos Natural





DCSND 01 Dust



DCSNS 01 Sand



DCSNL 01 Lithos



DCSNF 01 Fossil



DCSND 02 Dust



DCSNS 02 Sand



DCSNL 02 Lithos



DCSNF 02 Fossil



DCSND 03 Dust



DCSNS 03 Sand



DCSNL 03 Lithos



DCSNF 03 Fossil



DCSND 04 Dust



DCSNS 04 Sand



DCSNL 04 Lithos



DCSNF 04 Fossil



DCSND 05 Dust



DCSNS 05 Sand




DCSNL 05 Lithos




DCSNF 05 Fossil

# Sizes

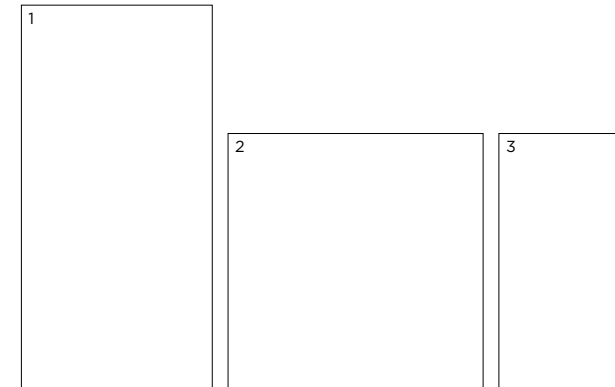

	Size (mm)	Thickness	Finish	Colour Availability
1	1197 x 597 (R)	9	Natural Natural Grip	All colours All DCSNF colours
2	797 x 797 (R)	9	Natural Natural Grip	All colours All DCSNF colours
3	797 x 397 (R)	9	Natural Natural Grip	All colours All DCSNF colours

(R) Rectified size - square edge with bevel. Swatch colours may vary from original. Samples should be requested. Special pieces shown on next page.






Floor: DCSNF 04 Fossil Natural Grip

## Special Pieces

---

	Size (mm)	Thickness	Finish	Colour Availability
1	Step Tread 1197 x 33 x 30 (R)	9	Natural	All colours
2	Skirting 597 x 46 (R)	9	Natural	All colours
3	Elemento A Elle 397 x 197 x 60 (R)	9	Natural	All colours

(R) Rectified size - square edge with bevel. Swatch colours may vary from original. Samples should be requested.



V2 - Moderate  
Shade Variation

**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

# Sensi

## Technical Data

**Product Type:** Unglazed Porcelain (BS EN 14411 – Group Bla)

**Use:** Floors & Walls

**Product Codes:** DCSND (Dust) / DCSNS (Sand) / DCSNL (Lithos) / DCSNF (Fossil)

### DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

### SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R9 from 3° to 10° R10 from 10° to 19° R11 from 19° to 27°	Natural - DCSND (Dust) & DCSNF (Fossil) Natural Grip & Bush Hammered Natural - DCSNS (Sand)
Areas with bare feet	DIN 51097	B over 18° to 24° C over 24°	Bush Hammered Natural - DCSNS (Sand)
Slip resistance Coefficient of friction	BS 7976-2 BS EN 16165	Test results upon request	

### PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0.08% (average value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm <sup>2</sup>	50 N/mm <sup>2</sup> (average value)
Breaking strength	BS EN ISO 10545-4	≥ 1300N	3200 N (average value)
Resistance to deep abrasion (unglazed tiles)	BS EN ISO 10545-6	≤ 175 mm <sup>3</sup>	140 mm <sup>3</sup> (average value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	ULA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB min.	UA
Stain resistance	BS EN ISO 10545-14	Declared value	Class 4-5
Reaction to fire	Based on the decision 96/603/EC and its changes		A1 <sub>FL</sub> /A1
Recycled content			20.5%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. March 2023

**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com