

Domus Wood Parquet

Engineered Wood



Floor: WDOP 033 Herringbone Matt UV Lacquer

24 Colours / 4 Finishes / 1 Size / 2 Formats


An exclusive and premium range of Engineered Wood from Domus, in a 100 x 500mm format which can either be laid as strips or in a herringbone layout. Incorporates a 4mm European oak surface layer and a birch plywood core, each harvested from responsibly managed forests with FSC® 100% accreditation.

















Floor: WDOP 009 Herringbone Matt UV Lacquer



Floor: WDOP 048 Herringbone Matt UV Lacquer

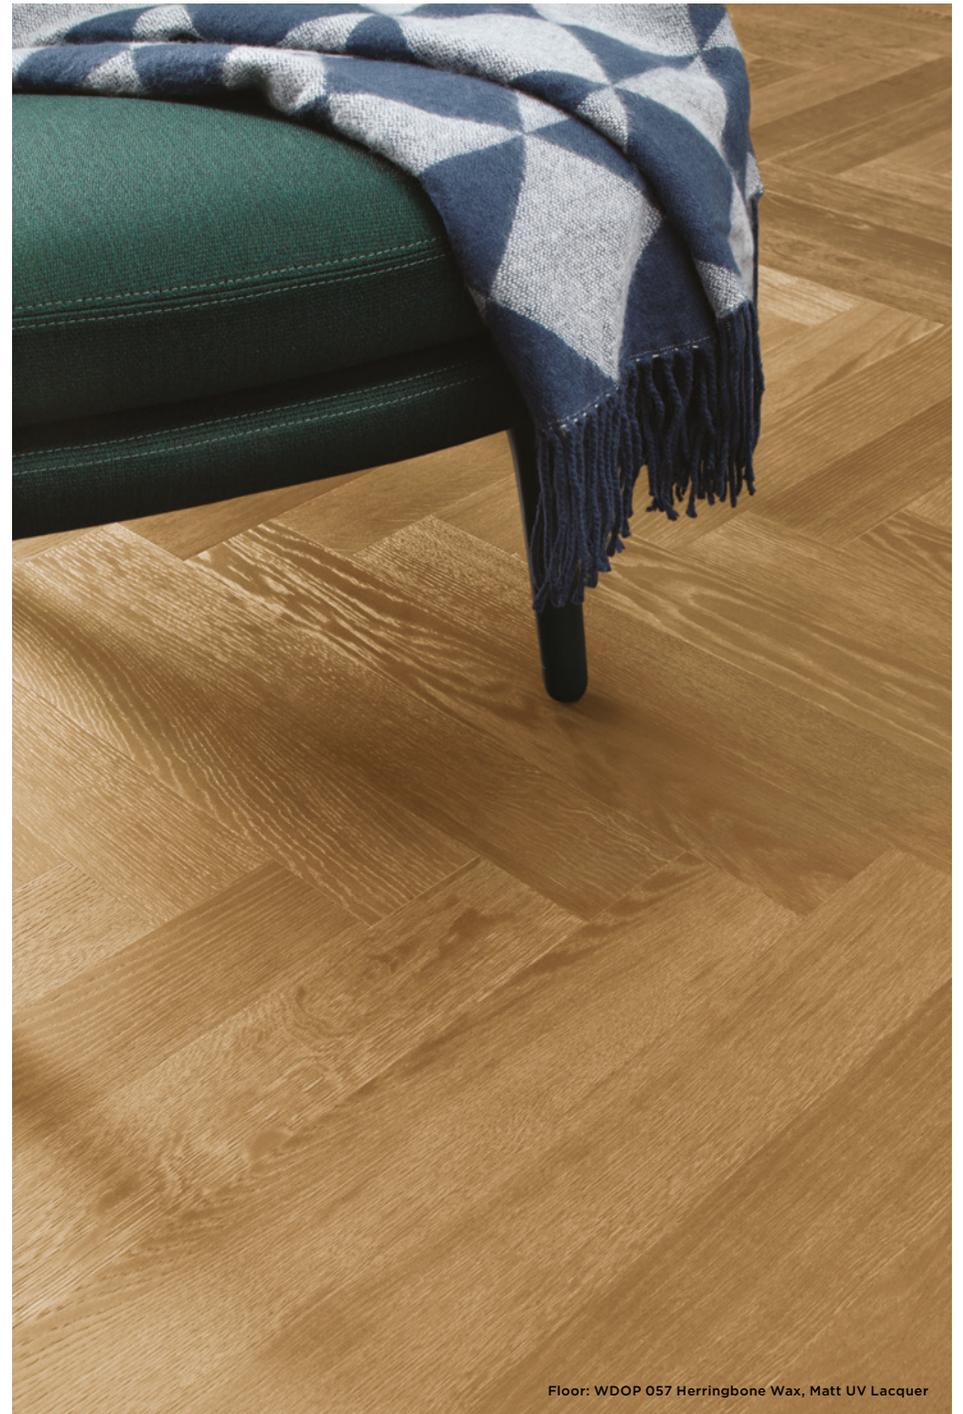

Floor: WDOP 057 Herringbone Wax, Matt UV Lacquer




Colours shown in herringbone format, can also be laid in strip format.

Colours shown in herringbone format, can also be laid in strip format.


Product Data

Engineered Wood

Parquet Formats



Herringbone
100 x 500 x 14mm




Strip
100 x 500 x 14mm

Specification

Material:	European Oak (<i>Quercus robur</i>)	Finishes:	Wax, Matt UV Lacquer (WDOP 056, 057 & 058)
Grade:	Select		Natural Oiled Matt (WDOP 019)
Brushing:	D-Brushed		Water-Based Matt Lacquer (WDOP 035)
Certification:	FSC®100%		Matt UV Lacquer (all other colours)
Construction:	14mm (10mm engineered multi-layered birch base and 4mm oak surface layer). 4-way micro bevel. Tongue & groove all 4 sides.		
Application:	Internal use only. Suitable with underfloor heating.		
Installation:	Recommended to be fully bonded.		
Treatment:	Tinted (WDOP 005, 009, 015, 018, 019, 029, 033-035, 039, 048 & 823) Tinted Bleached (WDOP 002, 011 & 021) Limed (WDOP 003, 059, 060, 804, 805 & 819) Natural (WDOP 056-058)		

Construction

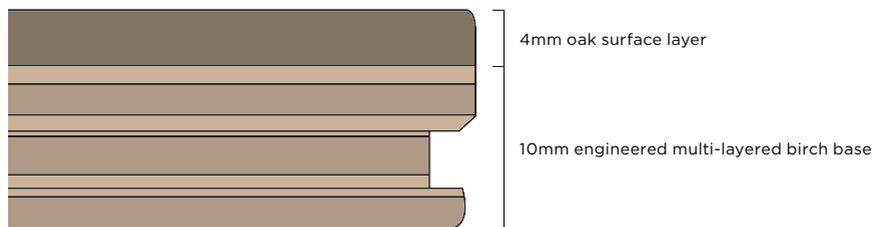

DOMUS
WOOD

service@domuswood.com | t: 020 8481 9500 | domuswood.com

Technical Data

Engineered Wood

Cleaning & Maintenance Specification:

ETC&M 03 (WDOP 019)

ETC&M 01 (all other colours)

PERFORMANCE & DURABILITY

Technical Characteristics	Industry Standard	Performance
Wood Species		Oak (<i>Quercus robur</i>)
Origin		Europe (FSC® 100%)
Reaction to Fire	UNI EN 14342 EN 13501-1	Dfl-S1
Formaldehyde Emission	UNI EN 14342 EN 717-1	E1 = 0.124mg/m³ air
Pentachlorophenol Emission	UNI EN 14342 CEN/TR 14823	< 5ppm
Thermal Conductivity	UNI EN 14342 EN ISO 10456-2007	0.10W/mK

NB: Compatible with underfloor heating systems - subject to K21 installation advice available on request.

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group Limited cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Limited Terms & Conditions of Sale, 12 April 2022

The mark of
responsible forestry
FSC® C124301

