

Prexious

Porcelain Marble



6 Colours / 2 Finishes / 3 Sizes / 2 Mosaics

Prexious is a range of rare, precious and extraordinarily elegant marble-effect porcelain tiles, full of natural character, variation and veining. Refer to Prexious Magnum for 6mm-thick extra-large lightweight slab formats.





Wall: DRPE 06 Matt



Wall: DRPE 03 Glossy




DRPE 01




DRPE 02



DRPE 03

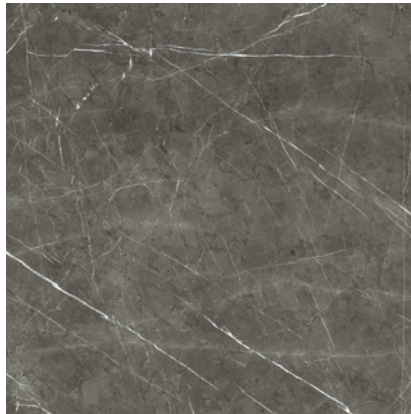

DRPE 04

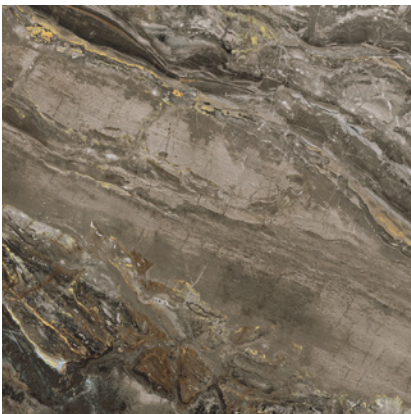


DRPE 05



DRPE 06

Sizes

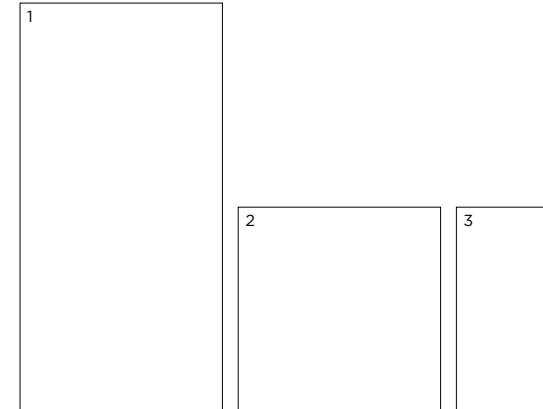

	Size (mm)	Thickness	Finish	Colour Availability
1	1197 x 597 (R)	9	Matt	All colours
			Glossy	All colours
2	597 x 597 (R)	9	Matt	All colours
			Glossy	All colours
3	597 x 297 (R)	9	Matt	All colours
			Glossy	All colours

(R) Rectified size – square edge with bevel. Mosaics and special pieces shown on next page. Swatch colours may vary from original. Samples should be requested.

V2 Moderate - V4 Random
Shade Variation

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Mosaic




DRPE 02




DRPE 01




DRPE 03



DRPE 04



DRPE 05




DRPE 06




Floor: DRPE 02 Glossy

Mosaics & Special Pieces

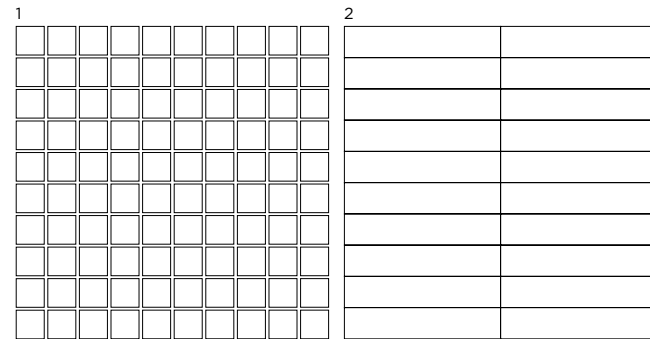

	Size (mm)	Thickness	Finish	Colour Availability
1	3D Mosaic 27 x 27 on 297 x 297 sheet	9	Mix*	All colours
2	Mosaic 147 x 27 on 297 x 297 sheet	9	Matt	All colours
			Glossy	All colours
	Step Tread 1200 x 330 x 30	9	Matt Glossy	All colours All colours
	Plinth Skirting 597 x 46	9	Matt Glossy	All colours All colours

Swatch colours may vary from original. Samples should be requested. *Mix finish is a mix of Matt and Glossy finishes.



DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Prexious

Technical Data

Product Type: Glazed Porcelain (BS EN 14411 – Group BIa)

Use: Floors & Walls

Product Code: DRPE

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	± 0.15%
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	± 5%
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	± 0.1%
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	± 0.2%
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	± 0.35%
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Slip resistance	BS 7976-2	Test results upon request	
Coefficient of friction	BS EN 16165		

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0.08% (Average value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	50 N/mm ² (Average value)
Breaking strength	BS EN ISO 10545-4	≥ 1300 N	3200 N (Average value)
Resistance to surface abrasion (glazed tiles)	BS EN ISO 10545-7	PEI* see classifications below	Class 2 – DRPE 04 & 06 / DRPE 05 & 03 Glossy Class 3 – DRPE 03 & 05 Matt Class 4 – DRPE 01 & 02
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA - Matt GLB - Glossy
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Class 3-4 - Glossy Class 4-5 – Matt
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	A1 _{FL} /A1
Recycled content			20.5%

*PEI classifications

- PEI 2 - Light traffic
- PEI 3 - Light to moderate traffic
- PEI 4 - Moderate to heavy traffic
- PEI 5 - Heavy to extra heavy traffic

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale, March 2023



DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com