

Barcelo Raw

Terracotta Design



Floor: DRBA 02 & 03 Natural

4 Colours / 1 Finish / 14 Sizes

Barcelo Raw is a range of terracotta tiles, handmade in Spain using traditional wood-fired, walk-in kilns. These charming tiles possess innate warmth and character, with hand-finished edges, creating a truly natural aesthetic.



Floor: DRBA 02 & 03 Natural




DRBA 01



DRBA 02




DRBA 03

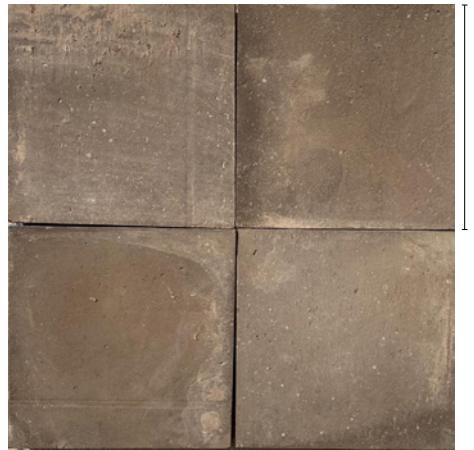


DRBA 04

Sizes

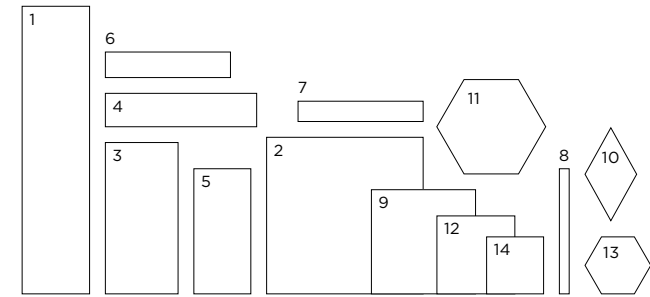

	Size (mm)	Thickness	Finish	Colour Availability
1	550 x 130 (N)	20	Natural	All colours
2	300 x 300 (N)	20	Natural	All colours
3	290 x 140 (N)	20	Natural	All colours
4	290 x 65 (N)	20	Natural	All colours
5	240 x 110 (N)	20	Natural	All colours
6	240 x 50 (N)	20	Natural	All colours
7	240 x 40 (N)	20	Natural	DRBA 01, 02 & 03
8	240 x 20 (N)	20	Natural	All colours
9	200 x 200 (N)	20	Natural	All colours
10	Diamond 180 x 100 (N)	15	Natural	All colours
11	Hexagon 170 x 150 (N)	20	Natural	All colours
12	150 x 150 (N)	15	Natural	All colours
13	Hexagon 115 x 100 (N)	15	Natural	All colours
14	110 x 110 (N)	13	Natural	All colours

(N) Nominal size - pressed edge. Swatch colours may vary from original. Samples should be requested.



V3 - High
Shade Variation

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Barcelo Raw

Technical Data

Product Type: Raw Terracotta

Use: Walls & Floors

Product Code: DRBA

THIS IS AN ARTISANAL, HANDMADE / HAND-FINISHED PRODUCT
IRREGULAR EDGES, VARIATION IN TONE, THICKNESS, SIZE / PLANARITY
(FLATNESS) ARE CHARACTERISTICS OF THIS MATERIAL
DIMENSIONS CAN VARY BETWEEN 5% AND 10% OF THE NOMINAL SIZE.

**Note: these tiles will require sealing with e.g. FILA PRW200 prior to grouting then
e.g. FILA MP90 Eco Xtreme prior to use**

Technical Characteristics	Industry Standards	Declared Value
Water absorption	BS EN ISO 10545-3	21 - 25%
Strength	BS EN ISO 10545-4	
➤ Modulus of Rupture		6 ± 1 N/mm ²
➤ Breaking Load		1700 N - 1800 N
➤ Breaking Strength		1590 N - 1680 N
Resistance to deep abrasion (unglazed tiles)	BS EN ISO 10545-6	2137 mm ³ - 2390 mm ³
Frost resistance	BS EN ISO 10545-12	Surface damage to be expected