

# Brac

Terracotta 3D



Wall: DTIR 05 Glossy

5 Colours / 2 Finishes / 1 Size

Brac is a range of three-dimensional terracotta bricks imagined as versatile components for creating structures and walls where unexpected interplays of light and shadow come alive. The elements can be installed vertically and horizontally in residential and public interiors.

Design Nathalie Du Pasquier

**Mutina**




Wall: DTIR 01 Natural & DTIR 02 Glossy





DTIR 01 Natural & DTIR 03 Glossy

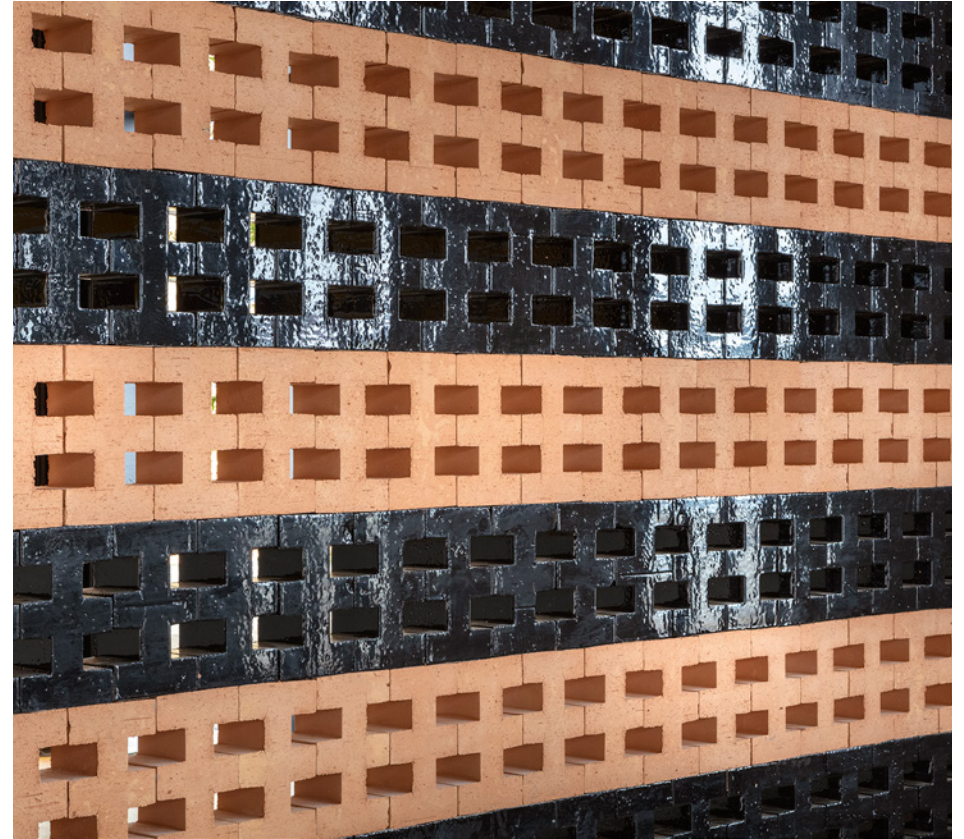

DTIR 01 Natural & DTIR 05 Glossy

# Sizes



DTIR 02 Glossy



DTIR 01 Natural




DTIR 03 Glossy



DTIR 04 Glossy







DTIR 05 Glossy



	Size (mm)	Thickness	Finish	Colour Availability
1	220 x 125 (N)	100	Natural Glossy	DTIR 01 DTIR 02, 03, 04 & 05


(N) Nominal size - pressed edge. Swatch colours may vary from original. Samples should be requested. Due to Brac being an artisanal product, a tolerance of 1-3mm is expected. Brac is suitable for use on indoor and outdoor walls with a maximum height of 4m.

# Layout Options

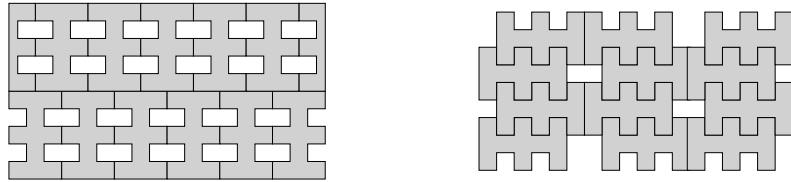

For security reasons, only staggered installation is strictly allowed.

# Special Pieces

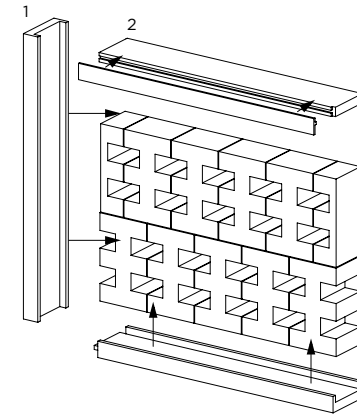

	Size (mm)	Thickness	Finish	Colour Availability
1	Linear Profile 300 x 125	40	Natural	DTIR 01
2	Terminal Profile 300 x 125	40	Natural	DTIR 01

Swatch colours may vary from original. Samples should be requested. Due to Brac being an artisanal product, a tolerance of 1-3mm is expected.

# Brac

Technical Data

**Product Type:** Extruded / Glossy Painted Extruded Terracotta

**Use:** Walls (Internal) & Walls (External)\*

\*DTIR O1 suitable for moderate exposure external walls

**Product Code:** DTIR

**ARTISANAL EXTRUDED PARTITION ELEMENTS.**

**FOR SAFETY REASONS ONLY STAGGERED INSTALLATION IS ADVISED.**

## DIMENSION & SURFACE QUALITY

**\* Nominal Size : 12.5 x 22 x 10cm with 1 – 3mm tolerance**

Technical Characteristics	Industry Standards	Requirement	Actual Value
Dimensions	BS EN ISO 772-16	As declared	T2 - R2

## 10PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 772-21 : 2011	As declared	12.5% (typical value)
Content of active soluble salts	BS EN ISO 772-5 : 2016	As declared	S2
Freeze-thaw resistance	BS EN ISO CEN/TS 772 -22 : 2006	As declared	F1 - moderate
Determination of horizontal variable loads	D.M. 1401/2008	As declared	C2
Frost resistance	BS EN ISO 10545-12	No surface alteration	Not resistant
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 <sub>FL</sub> /A1	A1
Recycled content			10%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. November 2023

**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com